

# Product Catalogue 2019

- High pressure washers and vacuum cleaners







# Nilfisk – with you all the way

Every day, throughout the world, people need clean workplaces, institutions, factories, hospitals, schools, airports and homes. As global populations grow larger, and living standards improve, the demand for cleaning increases.

Since Nilfisk was founded, we have been determined to meet these demands with products and services of the highest quality worldwide. As a result businesses, public institutions and private households all over the world continue to rely on Nilfisk to keep their facilities safe, their office environments productive and their homes clean. In short, we are committed to clearing the way for a safer, cleaner and more productive every day.

## Sustainable cleaning

At Nilfisk we believe, that one of the key drivers for sustainable cleaning is achieving more with less. Less energy, less water and less detergent. This will reduce costs for you as our customer, whilst simultaneously reducing our environmental footprint.


Working responsibly is a key priority for Nilfisk. We have signed the United National Global Compact and Carbon Disclosure Project and as a consequence, we actively work on lowering our carbon footprint and closely monitor our resource consumption.

All of our production facilities are certified under ISO 9001 and ISO 14001, which ensures a standardised approach to production and the necessary environmental management system.

## Making your business smarter

Today, new technologies are radically changing industries. And how we clean in the years to come will be different from the way we clean today. Data will enable us to predict the need for cleaning; autonomous solutions will provide more precise outcomes and connected products will enable our more than 700 trained service technicians to deliver even better maintenance.

At Nilfisk we strive to be at the forefront of this technological development for the benefit of your business. We have dedicated engineers and product developers all over the world, who are working around the clock creating innovative cleaning technologies and solutions. Ensuring that we meet your cleaning needs and that we provide the best possible quality of clean – both today and tomorrow. Which is why, we have made it our vision to lead intelligent cleaning to make your business smarter.

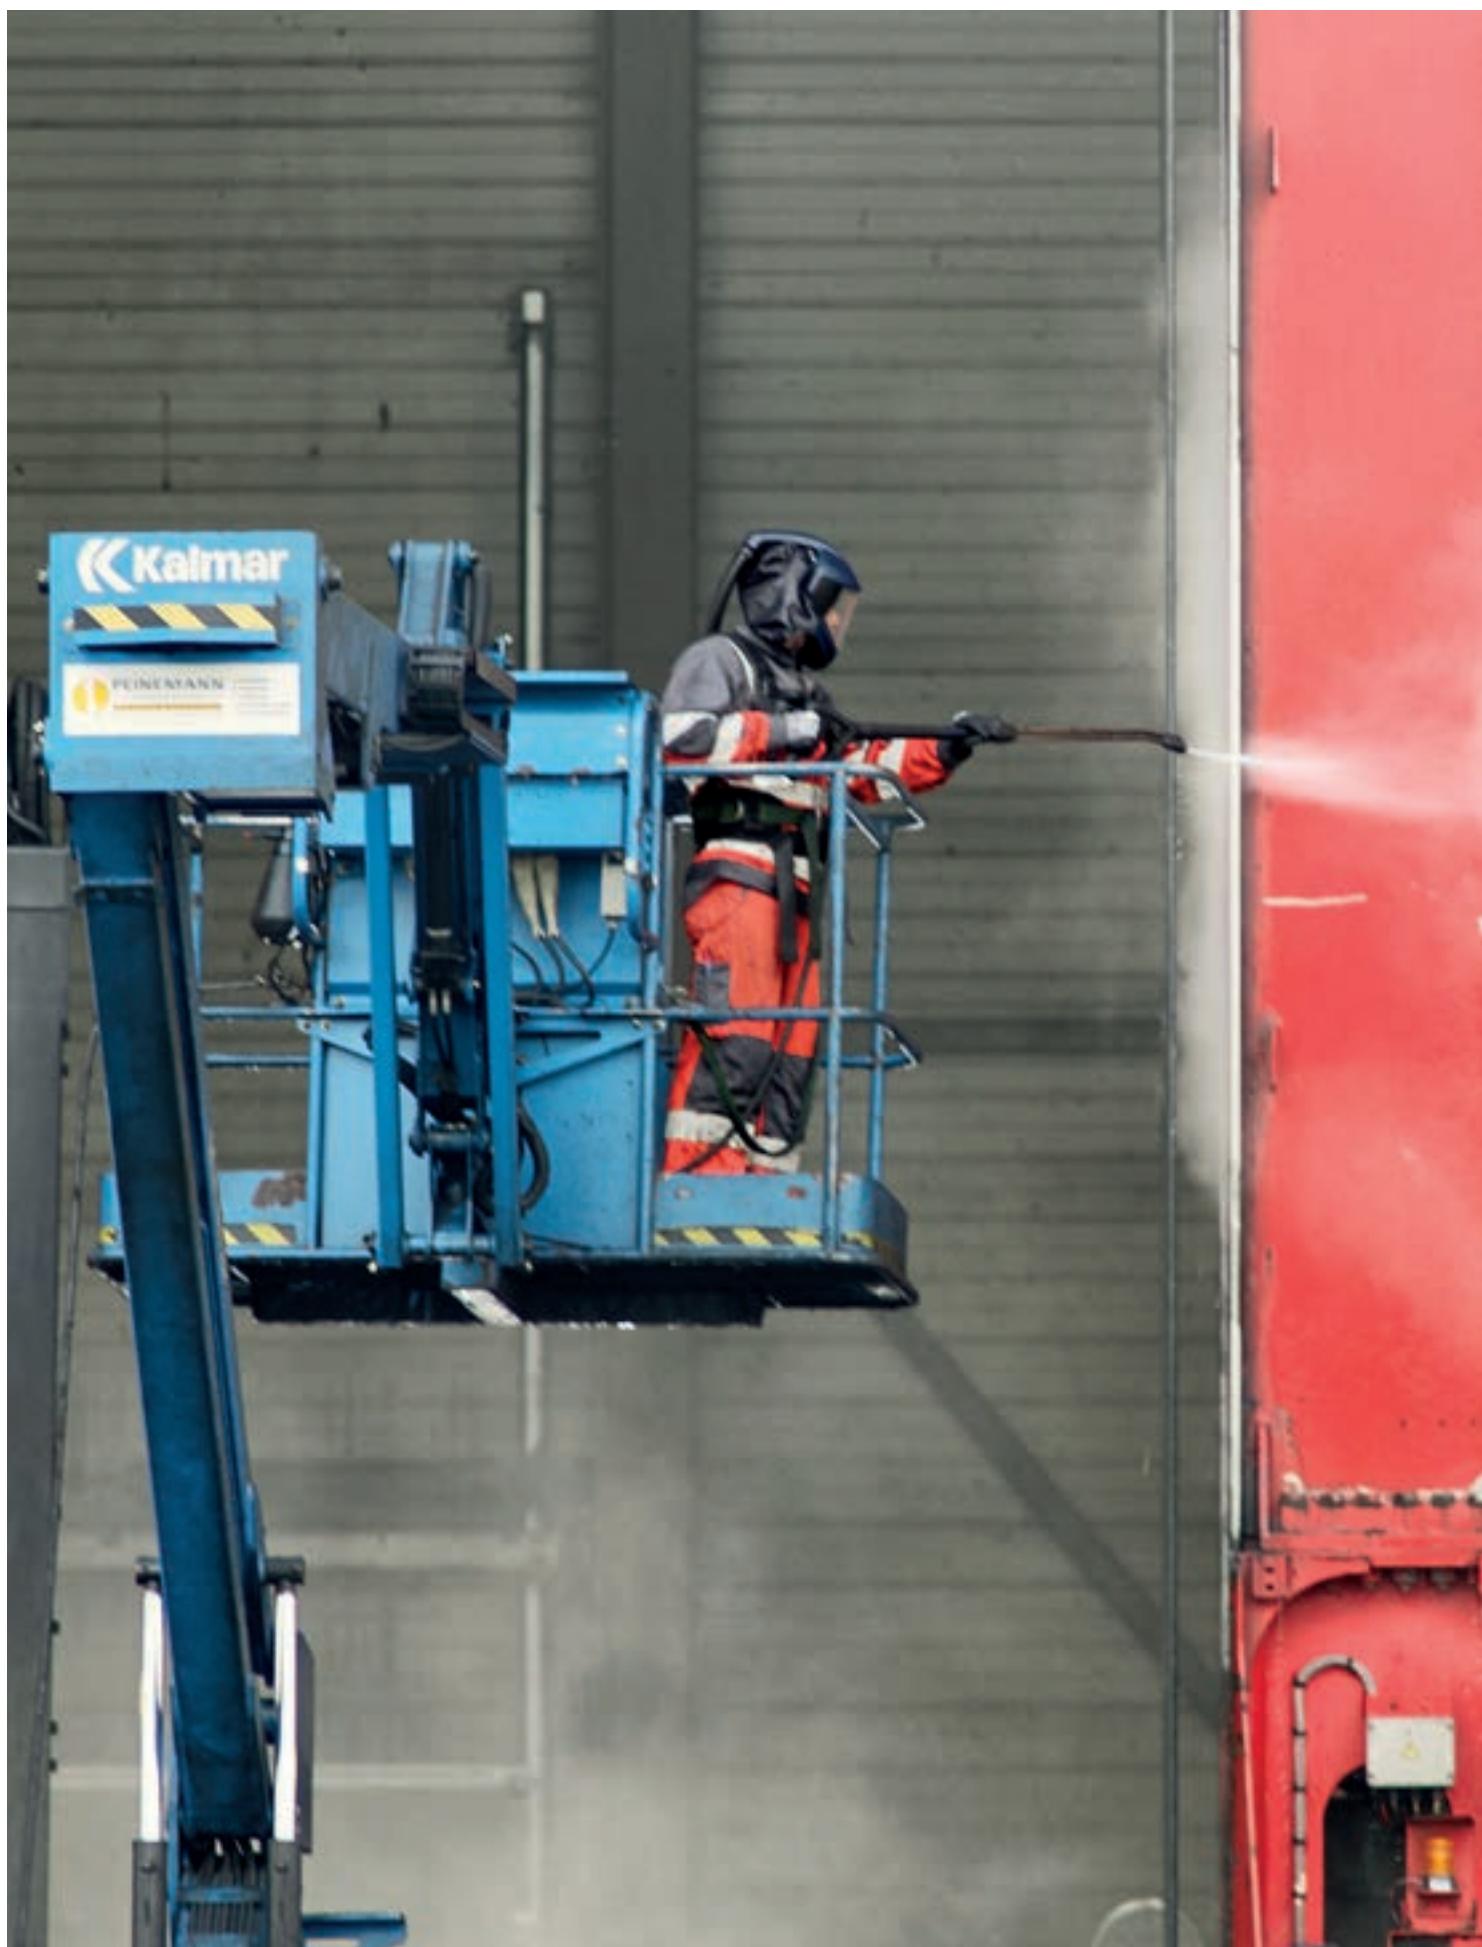

# Index

## Pressure Washers

MC Family overview	10	<b>H&amp;S intro</b>	
MH Family overview	11	ATTIX 33 M-class	109
MC/MH PE-DE Family overview	12	ATTIX 44 2M-class	110
SC/SH Family overview	13	ATTIX 7 M-class	111
MC 2C	14	ATTIX H-class	112
MC 3C	15	ATTIX 965-0H/M SD XC	113
MC 4M	16	<b>Accessory Sets for Vacuum</b>	
MC 5M	17	<b>Cleaners</b>	114
MC 6P	19	<b>Accessories for Vacuum</b>	
MC 7P	20	<b>Cleaners</b>	117
MC 8P	21	Hose connection and distributors	130
MH 3C	22	Suction hose systems	131
MH 3M	23	ATTIX 40 / 791 TYPE 22	133
MH 4M	24	ATTIX 995-0H/M SD XC TYPE 22	134
MH 5M	25	<b>Accessories for TYPE 22</b>	
MH 5M E	26	Vacuum Cleaners	135
MH 6P	27	<b>Consumer HPW</b>	
MH 7P	28	Compact range	139
MH 8P	29	Dynamic range	143
MC PE / DE	30	Excellent range	145
MH PE / DE	31	Premium range	147
SC UNO 4M	32	<b>Accessories for Consumer HPW</b>	148
SC UNO 5M, 6P & 7P	33	<b>Consumer Wet&amp;Dry</b>	
SC DUO 6P & 7P	34	Buddy range	152
SC DELTA 6P	35	Multi II range	155
SC DELTA 8P	36	<b>Accessories for Consumer W&amp;D</b>	157
SH SOLAR D	37		
SH SOLAR E	38		
SH SOLAR G	39		
SH TRUCK	40		
SH AUTO 5M	41		
<b>Accessories High</b>			
<b>Pressure Washers</b>	42		
Increased Flexibility with Options	80		
Liquid sprayers	82		
HydroScrub P300, P400 & S500	83		
MERLION	84		
MERMAID	85		

## Vacuum Cleaners

Technology logos	87		
Family overview	89		
Energy labelling	91		
SALTIX 10	92		
MAXXI II	93		
AERO 21	94		
AERO 26	95		
ATTIX 30	97		
ATTIX 40 INOX	98		
ATTIX 50	99		
ATTIX 33	100		
ATTIX 7	101		
ATTIX 961-01	102		
ATTIX 965-21 SD XC	103		
ATTIX 115 / 125	104		
ATTIX 145 / 155	105		
SB STATION	106		



# High Pressure Washers





## Pressure Washers



C 110.7 X-TRA



C 120.7-6



C 125.7-6 X-TRA



C 135.1-6i X-TRA



D 140.4-9 X-TRA



D-PG 140.4-9 X-TRA



E 145.4-9 X-TRA



E 150.2-10 H X-TRA



P 150.2-10 X-TRA

## Wet & Dry Vacuum Cleaners



Nilfisk Buddy II 12



Nilfisk Buddy II 18



Nilfisk Buddy II 18 T



Multi II 22 T



Multi II 30 T

# MC range - ideal for building & construction, agriculture, rental, industry and food industry

The MC range of mobile cold water pressure washers include solutions from semi-professional and infrequent use to our premium class range, ideal for the most demanding and heavy duty industrial cleaning tasks. The MC range clears the way for efficient cold water cleaning in a wide range of environments.



The MC 2C model is compact and lightweight unit designed for the most basic commercial cleaning tasks by craftsmen, tradesmen and around small farms. Robust and durable pump for low intensity or infrequent use.



The MC 3C is an innovative compact commercial pressure washer for everyday, light duty cleaning tasks. Easy to transport, the MC 3C also includes a wide range of storage solutions and an innovative detergent system to make cleaning more intuitive and productive.



Built on the same platform as the MC 3C line, the MC 4M is equipped with a more heavy duty pump and motor, ideal for more intense commercial cleaning applications. The detergent system improves cleaning efficiency both when using detergent and when only in normal high pressure mode.



The MC 5M range offers additional features for wider applications and more mobility. The range combines robustness, ergonomics, serviceability and pure cleaning power for extended use in tough environments.



The MC 6P FA range of cold water pressure washers brings together an unbeatable working life and durability, high cleaning performance and optimal ergonomics for the most demanding heavy duty cleaning tasks.



The MC 7P FA is equipped with the renowned, industrial class, C3 pump based on a tough 4 piston pump construction, double roller bearings, flow activated control system and 1450 rpm motor for long lifetime and low noise level. Ideal for the toughest of industrial applications.



The MC 7P FFA model is equipped with a stainless steel, non rusting frame and grey, non-marking wheels and hose to protect the working environment. The MC 7P FBFA food industry model includes an additional water break tank and external detergent injector ensuring full separation from the water network and the possibility to apply foam or special detergents.



The MC 8P is the ideal partner for applications requiring considerable cleaning power and water flow combined with a rugged and simple steel frame – perfect for agriculture, construction and transport.

All shown models are available with or without hose reel.

# The MH generation – high efficiency and intuitive use reducing cleaning costs

The MH line was the first hot-water range in the industry to implement an EcoPower boiler system that offers higher efficiency, reduced emissions and fuel costs. Across the entire MH range - from compact units to high-end industrial systems - you can count on fuel savings, cleaning efficiency, optimal handling and low emissions.

## EcoPower™

The versatile MH 3C combines low running costs, high performance, ease of use, best in class mobility and great cleaning efficiency. The innovative design makes it easy to move over all types of surfaces. The Ergo accessory system contributes to even more comfortable use of the machine and assures durability and reliability. It is the ideal hot water unit for general light everyday cleaning.



The MH 3M and 4M generations combine compact and easy to manoeuvre design with high efficiency heating, low run costs and intuitive use. Both models are equipped with slow running industrial motors and the MH 4M is equipped with a pressure activated unloader system for even higher levels of user comfort and reliability.

The MH 5M, 6P and 7P are based on the same intuitive and mobile design concept as the MH 3 and 4. Equipped also with the high efficiency EcoPower™ boiler system, the models also offer the benefits of pressure activated unloaders systems for added comfort and on board maintenance diagnostics for reduced downtime and service costs.

The MH 6P and MH 7P ranges are equipped with our unique 4 piston pumps for heavy duty work cycles and long lifetime. The MH 6P also includes models with high water flow for tougher applications in transport, construction and agriculture.



In addition to these core models, Nilfisk offers the high power MH 8P which combines high pressure and high water flow for routine cleaning of large amounts of dirt.

The ergonomic and easy to use MH design is now adapted to an electrical heated hot water unit. Ideal for use in areas where exhaust gases must be avoided, the MH 5M E offers pollution free hot water cleaning.

# Independent of electrical power and normal water sources

The Nilfisk petrol and diesel powered range of cold and hot water pressure washers are totally independent of electrical power sources – and even of normal water sources – making them highly flexible. Powered by a petrol or diesel engine and capable of drawing water from a tank, river or well, they are the ideal solution for cleaning agricultural or construction materials in the middle of a field or building site. The ideal solution for all cleaning jobs, customised, efficient and economical.



The MC PE series offer a wide range of available performances and engine sizes, meaning that you will find a Nilfisk product to solve all traditional cold water applications easily and quickly.

Large wheels, lightweight and easy to manoeuvre design and ergonomic accessory package ensures that the cleaning tasks are done with the lowest level of stress and effort. Ceramic pistons pumps ensure long working life. The thermal dump valve protects against overheating and damage if the user has a long break from cleaning or leaves the machine running by error.

The MC PE models are equipped with reliable Honda engines from 5 HP to 13 HP. Good performance, durability and sustainability are characteristics and trademark of Honda, making them the best choice of engines for the Nilfisk line.



The MC DE model is equipped with a Yanmar 10 HP motor – also well known for the same benefits as the Honda motors, this machine include an electric start function.

The motor has a low oil shut off security function and the motor-pump can be fitted with an optional speeder control to reduce noise level when the machine is running idle.

It is totally independent of usual electrical power sources – and even of normal water. The large, pneumatic wheels ensure good manoeuvrability over uneven ground which is common around farms and building sites.



The MH PE is a comprehensive range of petrol powered hot water models for professional use. Powered by a petrol motor and able to draw water from a tank, river or well, totally independent of electrical power and normal water sources. Ideal for fully autonomous use in the construction or agriculture, industrial segments or by contract cleaners. Easy to use control panel. Versions with high flow or high pressure.

MH PE exists in both mobile or trailer-mountable units and offer high efficiency, low cleaning costs and ease of use. A range of pump versions exist - direct driven or belt driven. All machines offer efficient and low cost water heating with the EcoPower™ boiler system.



The MH DE is a comprehensive range of diesel powered hot water models for professional use. Powered by a diesel driven motor and able to draw water from a tank, river or well, totally independent of electrical power and normal water sources. Ideal for all cleaning jobs in construction or agriculture. Easy oil drain from motor and pumps combined with the low pump oil safety function protects pump against running dry, keeping service costs low.

MH DE exists in both mobile or trailer-mountable units and offer high efficiency, low cleaning costs and ease of use. A range of pump versions exist - direct driven or belt driven. All machines offer efficient and low cost water heating with the EcoPower™ boiler system.

# Fixed cleaning applications – optimal cleaning – optimal profits

Nilfisk offers a full line of products for stationary cold and hot water units, also for self service applications. Ideal if you need to maintain high hygiene levels in a slaughter-house, kitchen or processing plant or if you need to degrease metal components on an industrial site.....



Nilfisk has the most complete range of stationary solutions on the market and is an ideal and trustworthy partner for your installation projects. We do not simply provide a standard product, but can modify it to your specific needs.

Machines can easily be installed in any location around a site. A carefully planned and optimised piping system will then ensure that you can easily and quickly clean the desired areas. Stationary units offer numerous advantages. For example, the units are pre-set for your own individual needs.

The SC UNO 4M is both a stationary and a portable cold water pressure washer unit. It can be easily carried from site to site with the robust steel transport handle or it can be placed as a fixed installation against a wall for stationary use thanks to the designed installation plate.

The SC UNO 5, 6, 7 and DUO models meet the latest demands for top performance levels within many different industries. Powered by either one or two pumps these cold water stationary units can handle heavy duty cleaning tasks. The innovative foam cabinet meets specific hygiene needs. The foam material is approved for use in the food industry, and as an added benefit, it reduces the noise level, adding comfort for both the user and the surroundings.

All models offer a variety of configurations according to user situations, and are built to be easy to understand and simple and intuitive to operate – at an attractive price level. Furthermore, intuitive user functions and the opportunity to customise the machines with equipment suited for your environment ensure high productivity.

The SC DELTA is a multi-pump, multi-pressure system encompassing 3, 4 or 6 pumps - and allowing up to 12 people to work at any time. The SC DELTA offers very high productivity and simultaneously enables of a wide range of user requirements of high & low pressures, different flow levels, and detergents. It is a very durable and reliable machine, with easy maintenance and minimal downtime. The high productivity combined with low maintenance cost offers the best-in-class total cost of cleaning.

The SH SOLAR E offers electrical heated hot water cleaning and the SH SOLAR D and G lines offer efficient and low cost water heating with the EcoPower™ boiler system. This gives you hot water at the lowest possible cost. At full power, the boiler offers significantly hotter water, thus reducing cleaning time for tasks involving oils, and greases.

The SH TRUCK is a simple, robust and corrosion proof hot water (diesel fired) stationary unit for permanent outdoor placement. The unit is equipped with cabinet insulation and electrical powered heater fan for frost protection and all year round cleaning. It is the ideal outdoor stationary pressure washer for use in haulage companies, fleet parks or for cleaning of animal and food transport vehicles near slaughterhouses. The SH TRUCK is equipped with the high efficiency EcoPower boiler offering reduced fuel consumption and costs.

The SH AUTO motor pumps are controlled by a frequency modulator, adjusting the incoming electrical frequency to the motor unit. As the frequency is adjusted, motor speed is increased or decreased accordingly. As a result of this change in speed, water flow and pressure from the pump are modified by a change in speed of the pistons. This technology reduces wear and tear and enables us to implement pumps without additional complex unloader parts. In addition, running at lower frequencies and speeds, motor pumps are much quieter...giving a more comfortable cleaning experience for the user.





### Ideal cold water cleaning for everyday tasks

- Automatic start/stop
- Ergo 2000 gun
- Ergo plus accessory concept
- Brass cylinder head
- Axial pump
- Steel reinforced High Pressure Hose (standard 10 m, XT 15 m)
- Detergent injector hose and doser
- Removable integrated detergent tank (2 l)
- Water flow regulation on all models
- 4-in-1 lance - four optional variable nozzles in one single lance

The MC 2C range is designed for low intensity use and routine cleaning tasks. They offer excellent cleaning performance, professional spray equipment, accessory storage and easy handling.



TECHNICAL DATA	MC 2C-120/520 T UK	MC 2C-140/610 XT UK
Recommended avg. hours of constant use per day*	1.5	1.5
Pump pressure (bar/MPa)	120/12	140/14
Cleaning impact (kg/force)	2.2	2.5
Water flow Qmax/Qiec (l/h)	520/470	610/540
Max. inlet temperature (°C)	60	60
Pump (RPM)	2800	2800
Length x width x height (mm)	394x391x955	394x391x955
Weight (kg)	27	28.1
Power consumption (kW)	2.3	2.9
Voltage/phase/frequency/current (V~/Hz/A)	230/1/50/10	230/1/50/12.6
El cable (m)	5	5
Ceramic coated pistons		
Stainless steel pistons	3	3
Detergent tank (l)	2	2
Suction height - primed (m)	0.5	0.5
Nozzle size	.0350	.0370
FEATURES		
Single-phase	•	•
Ergo accessory system	•	•
Hose reel		•
Brass cylinder head	•	•
Automatic start/stop	•	•
Water flow regulation		
STANDARD EQUIPMENT		
HOSE DN6 10M 1W FOR P-2	126528620	
-HOSE DN6 15M SWIVEL-3/8 F. HOSE REEL		101406176
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
4-IN-1 LANCE INCL 0350 ALUMINUM HEAD	106408251	
4-IN-1 LANCE INCL 0370 ALUMINUM HEAD		106408252
NOZZLE 0350 INDICATION RING BORDEAUX	101119736	
ITEM NO.	128470250	128470137

\* Based on 1-5 days use per week



### Compact cold water high pressure washers with external foam sprayer detergent system

- Pressure activated unloader system
- Pump oil tank with oil level sight and fill/empty function
- Easy opening and removing of cabinet for access to the pump
- Innovative holder protects Spray Gun from damage during storage and transport
- Turnable cable hook for easier removal and wind-up of power cable
- Robust design with large wheels - easy to manoeuvre over rough surfaces and steps
- Aluminium lifting bar

The MC 3C is designed for light, general cleaning tasks and is the ideal choice for tradesmen, small building companies, small garages and farms. This range is equipped with a professional 2800 rpm motor pump unit with stainless steel pistons developed for low to medium intensity use.



#### TECHNICAL DATA

	MC 3C-140/570 230/1/50/13 UK	MC 3C-150/570 XT 230/1/50/13 UK
Recommended avg. hours of constant use per day*	2	2
Pump pressure (bar/MPa)	140/14	150/15
Cleaning impact (kg/force)	2.5	2.6
Water flow Qmax/Qiec (l/h)	570/520	570/520
Max. inlet temperature (°C)	60	60
Pump (RPM)	2800	2800
Length x width x height (mm)	382x382x1017	382x382x1017
Weight (kg)	36	38
Power consumption (kW)	3	3
Voltage/phase/frequency/current (V/~/HZ/A)	230/1/50/12.6 Based on 1-5 days use per week	230/1/50/13
El cable (m)	5	5
Stainless steel pistons	3	3
Suction height dry (m)	0.5	0.5
Nozzle size	25034	.0340

#### FEATURES

Hose reel	•
Hose storage holders	•
Spray Gun Holder	•
Cable Hook, turnable	•
Lock for Hose Reel	•
Foam Sprayer	•
Detergent Canister 2,5 ltr	•

#### STANDARD EQUIPMENT

ERGO COUPLING KIT	101119496	101119496
10 M WIRE HOSE DN6	301002275	
HP-HOSE DN6X15M MC 3-4		107142542
HOSE REEL FOR MC 3-4		107145803
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036	
4-IN-1 LANCE INCL 0340 ALUMINUM HEAD		106408250
NOZZLE 0340 INDICATION RING VIOLET		101119735
DETERGENT TANK W. SEALING CAP - 2.5 LTR.		106403162
<b>ITEM NO.</b>	<b>107146373</b>	<b>107146371</b>

\* Based on 1-5 days use per week



### Mid range cold water high pressure washers with external foam sprayer detergent system

- Pressure activated unloader system
- Pump oil tank with oil level sight and fill/empty function
- Easy opening and removing of cabinet for access to the pump
- Innovative holder protects spray gun from damage during storage and transport
- Turnable cable hook for easier removal and wind-up of power cable
- Robust design with large wheels - easy to manoeuvre over rough surfaces and steps
- Aluminium lifting bar

The MC 4M is designed for light, general cleaning tasks and is the ideal choice for tradesmen, small building companies, small garages and farms. This range is equipped with a professional 1450 rpm motor pump unit with ceramic coated pistons for slightly heavier applications, developed for low to medium intensity use.



TECHNICAL DATA	MC 4M-100/770 230/1/50/13 UK	MC 4M-140/620 230/1/50/13 UK	MC 4M-140/620 XT 230/1/50/13 UK
Recommended avg. hours of constant use per day*	3	3	3
Pump pressure (bar/MPa)	100/10	140/14	140/14
Cleaning impact (kg/force)	2.9	2.8	2.8
Water flow Qmax/Qiec (l/h)	770/720	620/580	620/580
Max. inlet temperature (°C)	60	60	60
Pump (RPM)	1450	1450	1450
Length x width x height (mm)	382x382x1017	382x382x1017	382x382x1017
Weight (kg)	39	39	41
Power consumption (kW)	2.8	2.9	2.9
Voltage/phase/frequency/current (V~/Hz/A)	230/1/50/11.5	230/1/50/12.5	230/1/50/12.5
El cable (m)	5	5	5
Ceramic coated pistons	3	3	3
Suction height dry (m)	0.5	0.5	0.5
Nozzle size	.0350	25035	.0350
FEATURES			
Hose reel			•
Spray Gun Holder	•	•	•
Cable Hook, turnable	•	•	•
Lock for Hose Reel			•
Foam Sprayer	•		•
Detergent Canister 2,5 ltr	•		•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
10 M WIRE HOSE DN6	301002275	301002275	
HP-HOSE DN6X15M MC 3-4			107142542
HOSE REEL FOR MC 3-4			107145803
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122
FLEXOPOWER PLUS 990 W/O NOZZLE BLUE	106408228		
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ		106403036	
4-IN-1 LANCE INCL 0350 ALUMINUM HEAD			106408251
NOZZLE 0350 INDICATION RING BORDEAUX			101119736
NOZZLE 0530 INDICATION RING RED	101119742		
DETERGENT TANK W. SEALING CAP - 2.5 LTR.	106403162		106403162
HOLDER F. FOAM GUN	107142504		107142504
BRACKET F. DETERGENT TANK 2.5L	107142505		107142505
ITEM NO.	107146398	107146396	107146399

\* Based on 1-5 days use per week



### Innovative and versatile mid range cold water high pressure washers

- Tough and sturdy design with 30mm steel frame
- Optimal storage and transport with foldable handle and easy lifting points
- High mobility with large rear wheels and front castor wheel
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept

The MC 5 PA-FA mid range pressure washers are the most versatile partners for demanding customers in agriculture, industry, construction and automotive. The MC 5M range succeeds in combining an unmatched level of mobility and ease of use with unbeatable robustness, optimal service and great accessory storage features.



TECHNICAL DATA	MC 5M-100/770	MC 5M-100/770 XT	MC 5M-180/840	MC 5M-180/840 XT	MC 5M-200/1000	MC 5M-200/1000 XT	MC 5M-200/1050
Recommended avg. hours of constant use per day*	5	5	5	5	5	5	5
Pump pressure (bar/MPa)	100/10	100/10	180/18	180/18	200/20	200/20	200/20
Cleaning impact (kg/force)	3.2	3.2	4.1	4.1	5.3	5.3	5.6
Water flow Qmax/Qiec (l/h)	770/640	770/640	840/760	840/760	1000/940	1000/940	1050/960
Max. inlet temperature (°C)	60	60	60	60	60	60	60
Pump (RPM)	1450	1450	1450	1450	1450	1450	1450
Length x width x height (mm)	735x570x1020	890x570x1020	735x570x1020	890x570x1020	735x570x1020	890x570x1020	735x570x1020
Weight (kg)	68	73	66	72	71	76	73
Power consumption (kW)	2.6	2.6	4.8	4.8	6.1	6.1	6.1
Voltage/phase/frequency/current (V~/Hz/A)	230/1/50/12	230/1/50/12	400/3/50/8.5	400/3/50/8.5	400/3/50/11.4	400/3/50/11.4	400/3/50/11.4
El cable (m)	5	5	5	5	5	5	5
Ceramic pistons	3	3	3	3	3	3	3
Suction height dry (m)	1	1	1	1	1	1	1
Nozzle size	.0475	.0475	.0400	.0400	.0500	.0500	.0500

#### FEATURES

Detergent tank	•	•					•
Hose reel		•		•		•	
Parking brake	•	•					•
Automatic start/stop	•	•	•	•	•	•	•
2 x detergent injector	•	•					
Water flow regulation	•						•
1 x detergent injector		•					•

#### STANDARD EQUIPMENT

ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4			61369	61369	61369	61369	61369
QUICK COUPLING 3/4 W/GASKET	1602945	1602945					
10 M WIRE HOSE DN6	301002275		301002275		301002275		
HP-HOSE DN6 15M 3/8-3/8 F. QUICK COUPL.				101406175		101406175	
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.		301001100					
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770						101405770
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010					106403010
FLEXOPOWER PLUS 1120 W/O NOZZLE BLUE			106408227	106408227	106408227	106408227	
TURBOHAMMER PLUS 1115 STRAIGHT W12 0400				106403002			
TURBOHAMMER PLUS 1130 STRAIGHT W12 0500		106403003				106403003	
TURBOHAMMER NOZZLE W12 050		301001108					
NOZZLE 0400 INDICATION RING METAL GREY			101119738	101119738			
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741			101119741	101119741	101119741
<b>ITEM NO.</b>	<b>107146700</b>	<b>107146701</b>	<b>107146705</b>	<b>107146708</b>	<b>107146727</b>	<b>107146728</b>	<b>107146711</b>

\* Based on 1-5 days use per week



## Innovative and versatile mid range cold water high pressure washers

- Tough and sturdy design with 30mm steel frame
- Optimal storage and transport with foldable handle and easy lifting points
- High mobility with large rear wheels and front castor wheel
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept

The MC 5 PA-FA mid range pressure washers are the most versatile partners for demanding customers in agriculture, industry, construction and automotive. The MC 5M range succeeds in combining an unmatched level of mobility and ease of use with unbeatable robustness, optimal service and great accessory storage features.



TECHNICAL DATA	MC 5M-200/1050	MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130	MC 5M-220/1130	MC 5M-220/1130 FA	MC 5M-220/1130 XT
Recommended avg. hours of constant use per day*	5	5	5	5	5	5	5
Pump pressure (bar/MPa)	200/20	200/20	200/20	220/22	220/22	220/22	220/22
Cleaning impact (kg/force)	5.6	5.6	5.6	6.2	6.2	6.2	6.2
Water flow Qmax/Qiec (l/h)	1050/960	1050/960	1050/960	1130/1040	1130/1040	1130/1040	1130/1040
Max. inlet temperature (°C)	60	60	60	60	60	60	60
Pump (RPM)	1750	1450	1450	1450	1750	1450	1450
Length x width x height (mm)	735x570x1020	735x570x1020	890x570x1020	735x570x1020	735x570x1020	735x570x1020	890x570x1020
Weight (kg)	74	73	78	78	80	79	85
Power consumption (kW)	6.1	6.1	6.1	7.4	70.	7.4	7.4
Voltage/phase/frequency/current (V~/Hz/A)	220-440/3/60/20-10.7	400/3/50/11.4	400/3/50/11.4	400/3/50/13.3	220-440/3/60/23-12	400/3/50/13.3	400/3/50/13.3
El cable (m)	5	5	5	5	5	5	5
Ceramic pistons	3	3	3	3	3	3	3
Suction height dry (m)	1	1	1	1	1	1	1
Nozzle size	.0500	.0500	.0500	.0530	.0530	.0530	.0530
FEATURES							
Detergent tank	•	•	•	•	•	•	•
Hose reel			•				•
Parking brake	•	•	•	•	•	•	•
Automatic start/stop	•	•	•	•	•	•	•
2 x detergent injector			•	•	•	•	•
Water flow regulation	•	•	•	•	•	•	•
1 x detergent injector	•	•					•
STANDARD EQUIPMENT							
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369	61369	61369
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.			301001100				
HOSE DN8 1 WIRE 20M W.ERGO FEMALE COUPL.							301001101
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770	101405770		101405770	101405770	101405770	
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010	106403010	106403010
TURBOHAMMER PLUS 1125 STRAIGHT W11 0550							106402292
TURBOHAMMER PLUS 1130 STRAIGHT W12 0500			106403003				
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741	101119741		101119742	101119742	101119742
NOZZLE 0530 INDICATION RING RED				101119742	101119742	101119742	101119742
ITEM NO.	107146713	107146714	107146716	107146718	107146719	107146721	107146722

\* Based on 1-5 days use per week



## Heavy duty for intensive use in a wide range of applications


- NA6 4 ceramic piston pump with 80°C inlet temp
- Tough and sturdy design with 30mm steel frame
- Optimal storage and easy to transport with foldable handle and easy lifting points
- High mobility with large rear wheels and front castor wheel
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept
- Flow activated control system
- Low pump oil safety function

The MC 6P range of cold water pressure washers brings together an unbeatable working life and durability, high cleaning performance and optimal ergonomics for the most demanding heavy duty cleaning tasks for industry, agriculture, shipping, transport sector and food industry.



TECHNICAL DATA	MC 6P-170/1600 FA	MC 6P-170/1600 FAXT	MC 6P-180/1300 FA	MC 6P-180/1300 FAXT	MC 6P-250/1100 FA	MC 6P-250/1100 FAXT
Recommended avg. hours of constant use per day*	>5	>5	>5	>5	>5	>5
Pump pressure (bar/MPa)	170/17	170/17	180/18	180/18	250/25	250/25
Cleaning impact (kg/force)	7.9	7.9	6.5	6.5	6.4	6.4
Water flow Qmax/Qiec (l/h)	1600/1500	1600/1500	1300/1200	1300/1200	1100/1010	1100/1010
Max. inlet temperature (°C)	80	80	80	80	80	80
Pump (RPM)	1450	1450	1450	1450	1450	1450
Length x width x height (mm)	775x570x1020	930x570x1020	775x570x1020	930x570x1020	775x570x1020	930x570x1020
Weight (kg)	89	96	86	93	89	96
Power consumption (kW)	8.8	9	7.4	7.7	8.3	8.8
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/16	400/3/50/16	400/3/50/14.5	400/3/50/14.5	400/3/50/15	400/3/50/15.5
El cable (m)	8	8	8	8	8	8
Ceramic pistons	4	4	4	4	4	4
Suction height dry (m)	1	1	1	1	1	1
Nozzle size	.0950	.0950	.0700	.0700	.0475	.0475
FEATURES						
Stainless steel frame						
Hose reel		•		•		•
Food industry wheels and hose						
Pump oil warning system	•	•	•	•	•	•
Delayed automatic start stop	•	•	•	•	•	•
2 x detergent injector	•	•	•	•	•	•
STANDARD EQUIPMENT						
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369	61369
HOSE DN10 10 M 2W 3/8X3/8 INCH	6101766		6101766		6101766	
HP HOSE DN10 150DEG L15000mm		1402064		1402064		1402064
HOSE DN10 10 M 2W 3/8X3/8 GRAU-FOOD						
HOSE REEL COMPLETE		106403143		106403143		106403143
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122		106403122	106403122	106403122	106403122
SPRAY HANDLE W. SWIVEL LOCK		106402190				
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010	106403010
TURBOHAMMER PLUS 1125 STRAIGHT W11 0500						106402291
TURBOHAMMER PLUS 1125 STRAIGHT W11 0700				106402294		
TURBOHAMMER PLUS 1130 STR./NOZ. W11 1000		106403078				
TORNADO NOZZLE 0475					301150005	301150005
NOZZLE 0700 INDICATION RING ORANGE			101119748	101119748		
TORNADO NOZZLE 0950 DARK ROSE	101117655	101117655				
NOZZLE 1300 - INDICATION RING BROWN						
ITEM NO.	107146755	107146761	107146752	107146759	107146751	107146758

\* Based on 1-5 days use per week

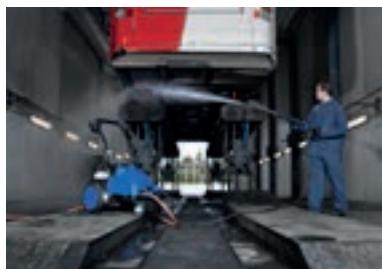

## Ultimate industrial quality for the toughest of industrial applications

- C3 4 ceramic piston pump with 85°C inlet temp
- Tough and sturdy design with 30mm steel frame
- Optimal storage and easy to transport with foldable handle and easy lifting points
- High mobility with large rear wheels and front castor wheel
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept
- Low activated control system
- Low pump oil safety function

The MC 7P industrial range of cold water pressure washers combines the renowned lifetime and quality of the C3 pump with optimal ergonomics to bring an unbeatable heavy duty pressure washer for industry, agriculture, shipping, transport sector and food industry.



TECHNICAL DATA	MC 7P-195/1280 FA	MC 7P-195/1280 FA	MC 7P-195/1280 FAXT	MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA
Recommended avg. hours of constant use per day*	>5	>5	>5	>5	>5
Pump pressure (bar/MPa)	195/19.5	195/19.5	195/19.5	195/19.5	195/19.5
Cleaning impact (kg/force)	6.7	6.7	6.7	6.7	6.7
Water flow Qmax/Qiec (l/h)	1280/1180	1280/1180	1280/1180	1280/1180	1280/1180
Max. inlet temperature (°C)	85	85	85	70	85
Pump (RPM)	1450	1450	1450	1450	1450
Length x width x height (mm)	775x570x1020	775x570x1020	930x570x1020	775x570x1020	775x570x1020
Weight (kg)	89	90	95	94	89
Power consumption (kW)	8	8	8	8	8
Voltage/phase/frequency/current (V~/~HZ/A)	400/3/50/14	230/400/3/50/24.5/14	400/3/50/15	400/3/50/14	400/3/50/14
El cable (m)	8	8	8	8	8
Ceramic pistons	4	4	4	4	4
Detergent tank capacity (l)	2 x 2.5	2 x 2.5	2 x 2.5	2 x 2.5	2 x 2.5
Suction height dry (m)	1	1	1	1	1
Nozzle size	.0680	.0680	.0680	.0680	.0680
FEATURES					
Stainless steel frame				•	•
Hose reel			•		
Food industry wheels and hose				•	•
Pump oil warning system	•	•	•	•	•
Delayed automatic start stop	•	•	•	•	•
Water break tank				•	
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369
HOSE DN10 10 M 2W 3/8X3/8 INCH	6101766	6101766			
HP HOSE DN10 150DEG L15000mm			1402064		
HOSE DN10 10 M 2W 3/8X3/8 GRAU-FOOD				6101767	6101767
HOSE REEL COMPLETE			106403143		
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010
TURBOHAMMER PLUS 1125 STRAIGHT W11 0700			106402294		
NOZZLE 0680 INDICATION RING GREY	101119747	101119747	101119747	101119747	101119747
FOAM INJECTOR W BYPASS S. S				6401243	
ITEM NO.	107146800	107146803	107146801	107146812	107146802

\* Based on 1-5 days use per week



## The ultimate in durability and robustness for tough applications requiring high water flow

- Tough steel or stainless steel frame variants
- Slow running 1450 rpm motors with low noise level
- Ceramic pistons for longer working life
- Simple and easy to use
- Parking brake
- 15m HP hose

The MC 8P is a tough, robust cold water range combining high water flow and high pressure. The MC 8P is available with both powder coated frame or stainless steel frame for additional resistance in tough environments.



TECHNICAL DATA	MC 8P-160/2500	MC 8P-160/2500 ST	MC 8P-180/2100
Recommended avg. hours of constant use per day*	5	5	5
Pump pressure (bar/MPa)	160/16	160/16	180/18
Cleaning impact (kg/force)	12.5	12.5	11.1
Water flow Qmax/Qiec (l/h)	2500/2450	2500/2450	2100/2050
Max. inlet temperature (°C)	50	50	50
Pump (RPM)	1450	1450	1450
Length x width x height (mm)	900x660x910	900x660x910	900x660x910
Weight (kg)	130	130	130
Power consumption (kW)	14.5	14.5	14
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/24.9	400/3/50/24.9	400/3/50/24
El cable (m)	5	5	5
Ceramic pistons	3	3	3
Suction height dry (m)	1.5	1.5	1.5
Suction height - primed (m)	2.5	2.5	2.5
Nozzle size	.1590	.1590	.1200
FEATURES			
Stainless steel frame		•	
SilentPower - 1450 rpm motor	•	•	•
Parking brake	•	•	•
Pneumatic wheels	•	•	•
Automatic on/off and delayed action	•	•	•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
HOSE LINER 20 R1	6577	6577	6577
HP HOSE DN10 150DEG L1500mm			1402064
15 M 2 WIRE HOSE 1/2 DN12	4810213	4810213	
ERGO 2000 STANDARD W. HOSE SWIVEL			106403122
SPRAY HANDLE W. SWIVEL LOCK	106402190	106402190	
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010
NOZZLE 1200 INDICATION RING CARAMELE			101119758
TORNADO + NZLE 1590 1/8-27NPT	301150004	301150004	
ITEM NO.	301002535	301002619	301002534

\* Based on 1-5 days use per week



## Compact and high performing

- EcoPower™ boiler with EcoMode function
- EcoPower™ boiler >92% efficiency giving reduced fuel costs
- Brass pump head
- Pressure activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- On-board diagnostics function

The MH 3C offers high cleaning efficiency and low running costs via optimal cleaning and heating performance. It is the ideal hot water unit for general light everyday cleaning in applications such as automotive, craftsmen and light agriculture.



### TECHNICAL DATA

### MH 3C-90/670 PAX

Recommended avg. hours of constant use per day*	2
Pump pressure (bar/MPa)	90/9
Cleaning impact (kg/force)	2.4
Water flow Qmax/Qiec (l/h)	670/640
Water temperature (water/steam) (°C)	80/150
Max. inlet temperature (°C)	40
Fuel consumption at ΔT=45°C (kg/h)	2.9
Fuel tank (l)	15
Length x width x height (mm)	1010x700x1016
Weight (kg)	119
El cable (m)	5
Nozzle size	.0530

### FEATURES

Single-phase	•
EcoPower boiler-high efficiency	•
Ergo accessory system	•
Spray Gun Holder	•
Cable Hook, turnable	•
2 lance holder	•

### STANDARD EQUIPMENT

ERGO COUPLING KIT	101119496
HOSE NOZZLE 20R3/4	61369
HP HOSE DN6X10M QC 3/8IN NILFISK HW	101406069
HP-HOSE DN6 15M 3/8-3/8 F. QUICK COUPL	101406175
HOSE REEL NILFISK ACCESSORY	106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036
NOZZLE 0340 INDICATION RING VIOLET	101119735
NOZZLE 0400 INDICATION RING METAL GREY	
<b>ITEM NO.</b>	<b>107146882</b>

\* Based on 1-5 days use per week



## Optimal ergonomics and reliable cleaning

- EcoPower boiler with EcoMode function
- Pressure activated unloader system
- Simple fuel level sight
- Easy access to components
- Easy pump oil service functions with tank and oil sight
- Innovative design with 4 big wheels
- Easy to transport, can easily be pushed/pulled across uneven surfaces

The MH 3M is ideal for all hot water commercial and light industrial cleaning tasks and it offers higher efficiency and quicker cleaning thanks to the improved fuel saving EcoPower boiler system. Furthermore, service and maintenance can be carried out quickly, as all vital parts are easy to inspect and reach. The MH 3M is equipped with our industrial NA4 pump with 3 ceramic coated pistons and a high efficiency 4 pole motor.



### TECHNICAL DATA

### MH 3M-100/600 PA 230/1/50 UK

Recommended avg. hours of constant use per day*	3
Pump pressure (bar/MPa)	100/10
Cleaning impact (kg/force)	2.4
Water flow Qmax/Qiec (l/h)	600/600
Pump (RPM)	1450
Water temperature (water/steam) (°C)	80
Max. inlet temperature (°C)	40
Fuel consumption at ΔT=45°C (kg/h)	2.7
Fuel tank (l)	15
Length x width x height (mm)	1010x700x1016
Weight (kg)	114
Power consumption (kW)	2.8
Voltage/phase/frequency/current (V~/~HZ/A)	230/1/50/12.5
Ceramic coated pistons	3
El cable (m)	5
Nozzle size	.0450

### FEATURES

Fuel tank	•
Delayed automatic start stop	•
Fuel sight from outside	•
Eco mode feature	•
2 lance holder	•
Large wheel – 4 pcs.	•
Anti Stone	•

### STANDARD EQUIPMENT

ERGO COUPLING KIT	101119496
HOSE NOZZLE 20R3/4	61369
HP HOSE DN6X10M QC 3/8IN NILFISK HW	
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036
NOZZLE 0400 INDICATION RING METAL GREY	101119738

ITEM NO.	107146897
----------	-----------

\* Based on 1-5 days use per week



## Performance, life-time and ergonomics

- EcoPower boiler with EcoMode function
- Pressure activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Low pump oil warning system
- Low fuel warning system
- On-board diagnostics function

The MH 4M series takes mid-range hot water high pressure washers to a new level, meeting the latest productivity demands in the market. The MH 4M is equipped with our industrial NA5 pump with 3 ceramic pistons and a high efficiency 4 pole motor.



TECHNICAL DATA	MH 4M-100/680 PA UK	MH 4M-100/680 PAX UK	MH 4M-210/1000 PAX
Recommended avg. hours of constant use per day*	5	5	5
Pump pressure (bar/MPa)	100/10	100/10	210/21
Cleaning impact (kg/force)	2.5	2.5	5.5
Water flow Qmax/Qiec (l/h)	680/630	680/630	1000/940
Pump (RPM)	1450	1450	1450
Water temperature (water/steam) (°C)	90/150	90/150	90/150
Max. inlet temperature (°C)	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	2.8	2.8	4.1
Fuel tank (l)	15	15	15
Length x width x height (mm)	1010x700x1016	1010x700x1016	1010x700x1016
Weight (kg)	138	141	149
Power consumption (kW)	2.9	2.9	8.0
Voltage/phase/frequency/current (V~/~HZ/A)	230/1/50/13	230/1/50/13	400/3/50/13,5
Detergent tank (l)	A: 10 + B:	A: 10 + B:	A: 10 + B:
Ceramic pistons	3	3	3
El cable (m)	5	5	5
Nozzle size	.0475	.0475	.0475
FEATURES			
Hose reel		•	•
Pump oil warning system	•	•	•
Service indicator	•	•	•
Delayed automatic start stop	•	•	•
2 x detergent injector	•	•	•
Water flow regulation	•	•	•
Fuel sight from outside	•	•	•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369
NILFISK BA VALVE COMP. GARDENA			
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.			301001100
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770		
HP-HOSE DN8X15M QC 3/8 NILFISK HW			
HOSE REEL NILFISK ACCESSORY		106403184	106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122
TORNADO PLUS 1000 BEND W/O NOZZLE			106403011
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036	106403036	
NOZZLE 0435 INDICATION RING BLUE			
TORNADO NOZZLE 0475	301150005	301150005	301150005
FILTER CPL. MH 5000MM2 50µ ACCESSORY	107144272	107144272	107144272
ITEM NO.	107146910	107146911	107146912

\* Based on 1-5 days use per week



## High performance, long life & optimal manoeuvrability

- EcoPower boiler with EcoMode function
- EcoPower boiler >92% efficiency giving reduced fuel costs
- Brass pump head 3 ceramic pistons
- Pressure activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can easily be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Low pump oil warning system
- Low fuel warning system
- On-board diagnostics function

The MH 5M series offers high cleaning efficiency and low running costs via optimal cleaning and heating performance. It is the ideal hot water unit for segments such as automotive, agriculture and industry.



TECHNICAL DATA	MH 5M-100/760 PA 230/1/50 UK	MH 5M-100/760 PAX 230/1/50 UK	MH 5M-210/1100 PAX
Recommended avg. hours of constant use per day*	5	5	5
Pump pressure (bar/MPa)	100/10	100/10	210/21
Cleaning impact (kg/force)	2.7	2.7	6.1
Water flow Qmax/Qiec (l/h)	760/680	760/680	1100/1050
Pump (RPM)	1450	1450	1450
Water temperature (water/steam) (°C)	90/150	90/150	90/150
Max. inlet temperature (°C)	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	3	3	4.7
Fuel tank (l)	30	30	30
Length x width x height (mm)	1188x700x1020	1188x700x1020	1188x700x1020
Weight (kg)	167	170	179
Power consumption (kW)	2.9	2.9	7.9
Voltage/phase/frequency/current (V~/Hz/A)	230/1/50/13	230/1/50/13	400/3/50/13.5
Detergent tank (l)	A: 10 + B: 10	A: 10 + B: 10	A: 10 + B: 10
Ceramic pistons	3	3	3
El cable (m)	5	5	5
Nozzle size	.0500	.0500	.0550
FEATURES			
EcoPower boiler-high efficiency	•	•	•
Hose reel		•	•
Pump oil warning system	•	•	•
Service indicator	•	•	•
Automatic on/off and delayed action	•	•	•
Flame sensor	•	•	•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369
HOSE DN8 1 WIRE 20M W.ERGO FEMALE COUPL.		301001101	301001101
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770		
HOSE REEL NILFISK ACCESSORY		106403184	106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010
TORNADO NOZZLE 0475			
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741	
NOZZLE 0550 INDICATION RING NEONGREEN			101119743
FILTER CPL. MH 5000MM2 50µ ACCESSORY	107144272	107144272	107144272
ITEM NO.	107146941	107146942	107146950

\* Based on 1-5 days use per week



## Electrically heated hot water for exhaust gas free heating

- Pollution free electrical heating
- Precise temperature control and fast heating effect
- 1450 rpm motor with low noise level
- QuickService concept reduces maintenance costs
- Easy to use control panel, all controls in one place
- Ergonomic accessory system for additional user comfort
- Max. inlet temperature 60°C

The ergonomic and easy to use MH design is now adapted to an electrical heated hot water unit. Ideal for use in areas where exhaust gases must be avoided, the MH 5M E offers pollution free hot water cleaning.



TECHNICAL DATA	MH 5M 180/800 PA E12	MH 5M 180/800 PA E24
Recommended avg. hours of constant use per day*	5	5
Pump pressure (bar/MPa)	180/18	180/18
Cleaning impact (kg/force)	4.0	4.0
Water flow Qmax/Qiec (l/h)	800/740	800/740
Max. inlet temperature (°C)	60	60
Length x width x height (mm)	1188x700x1045	1188x700x1045
Weight (kg)	125	131
El cable (m)	5	5
Nozzle size	.0400	.0400
FEATURES		
SilentPower - 1450 rpm motor	•	•
QuickService - innovative concept	•	•
Ergo accessory system	•	•
Electrical heating system	•	•
Wdk dual detergent injector	•	•
Mobile	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770	101405770
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
UNIVERSAL PLUS LANCE 1080 BEND W/O NOZZ	106403035	106403035
NOZZLE 0400 INDICATION RING METAL GREY	101119738	101119738
WATER FILTER COMPLETE	107144272	107144272
ITEM NO.	107146865	107146866

\* Based on 1-5 days use per week



## Tough and efficient - for heavy duty applications



- EcoPower boiler with EcoMode function
- EcoPower boiler >92% efficiency giving reduced fuel costs
- Brass pump head 4 ceramic pistons
- Flow activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can easily be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Low pump oil warning system
- Low fuel warning system
- On-board diagnostics function
- Easy to use control panel

The MH 6P series features machines with high power & pressure for tough cleaning tasks. Ideal for heavy use in agriculture, construction, transport or industrial segments.



TECHNICAL DATA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX
Recommended avg. hours of constant use per day*	>5	>5	>5	>5
Pump pressure (bar/MPa)	175/17.5	175/17.5	200/20	200/20
Cleaning impact (kg/force)	6.2	6.2	6.9	6.9
Water flow Qmax/Qiec (l/h)	1250/1150	1250/1150	1300/1200	1300/1200
Pump (RPM)	1450	1450	1450	1450
Water temperature (water/steam) (°C)	90/150	90/150	90/150	90/150
Max. inlet temperature (°C)	40	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	5.4	5.4	5.3	5.3
Fuel tank (l)	30	30	30	30
Length x width x height (mm)	1188x700x1020	1188x700x1020	1188x700x1045	1188x700x1045
Weight (kg)	180	188	198	207
Power consumption (kW)	8.5	8.5	9.1	9.1
Voltage/phase/frequency/current (V~/~HZ/A)	400/3/50/14.5	400/3/50/14.5	400/3/50/15.5	400/3/50/15.5
Detergent tank (l)	A: 10 + B: 10	A: 10 + B: 10	A: 10 + B: 10	A: 10 + B: 10
Ceramic pistons	4	4	4	4
El cable (m)	5	5	5	5
Nozzle size	.0750	.0750	.0680	.0680
FEATURES				
EcoPower boiler-high efficiency	•	•	•	•
Hose reel		•		•
Pump oil warning system	•	•	•	•
Service indicator	•	•	•	•
Automatic on/off and delayed action	•	•	•	•
Flame sensor	•	•	•	•
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369
HOSE DN10 10 M 2W 3/8X3/8 INCH	6101766		6101766	
M 20 WIRE HOSE 3/8 DN10		1402072		1402072
HOSE REEL NILFISK ACCESSORY		106403184		106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010
NOZZLE 0680 INDICATION RING GREY			101119747	101119747
NOZZLE 0750 INDICATION RING RED	101119749	101119749		
FILTER CPL. MH 5000MM2 50µ ACCESSORY	107144272	107144272	107144272	107144272
ITEM NO.	107146960	107146963	107146961	107146964



## Heavy duty and efficient hot water cleaning for intense use

- EcoPower boiler with EcoMode function
- EcoPower boiler >92% efficiency giving reduced fuel costs
- Brass pump head
- Innovative design with 4 big wheels
- Easy to transport, can easily be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Low pump oil warning system
- Low fuel warning system
- On-board diagnostics function
- Easy to use control panel

The MH 7P is the optimal solution for heavy duty, industrial cleaning tasks. The 4 piston pump and high power boiler system offer unbeatable cleaning effect and long lifetime. The flow activated unloader system adds a new level of reliability and comfort.



TECHNICAL DATA	MH 7P-180/1260 FA	MH 7P-180/1260 FAX
Recommended avg. hours of constant use per day*	>5	>5
Pump pressure (bar/MPa)	180/18	180/18
Cleaning impact (kg/force)	6.3	6.3
Water flow Qmax/Qiec (l/h)	1260/1170	1260/1170
Pump (RPM)	1450	1450
Water temperature (water/steam) (°C)	90/150	90/150
Max. inlet temperature (°C)	40	40
Fuel consumption at ΔT=45°C (kg/h)	5.3	5.3
Fuel tank (l)	30	30
Length x width x height (mm)	1188x700x1045	1188x700x1045
Weight (kg)	195	204
Power consumption (kW)	7.6	7.6
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/13.5	400/3/50/13.5
Detergent tank (l)	A:10 + B:10	A:10 + B:10
Ceramic pistons	4	4
El cable (m)	5	5
Nozzle size	.0680	.0680
FEATURES		
EcoPower boiler-high efficiency	•	•
Hose reel		•
Pump oil warning system	•	•
Service indicator	•	•
Automatic on/off and delayed action	•	•
Flame sensor	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369
HOSE DN10 10 M 2W 3/8X3/8 INCH	6101766	
M 20 WIRE HOSE 3/8 DN10		1402072
HOSE REEL NILFISK ACCESSORY		106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010
NOZZLE 0680 INDICATION RING GREY	101119747	101119747
FILTER CPL. MH 5000MM2 50µ ACCESSORY	107144272	107144272
ITEM NO.	107146980	107146982

\* Based on 1-5 days use per week



## Tough and efficient - for heavy duty applications requiring high water flow

- EcoPower boiler with > 92% efficiency for reduced fuel cost
- 1450 RPM motor
- High flow pump
- Easy to use control panel
- Steel frame and chassis
- Quick service concept reduces maintenance costs
- Optimal machine protection against low fuel, low pump oil. Includes flame sensor and exhaust gas temperature sensor.
- Diagnostics system
- Two way chemical dosing system with automatic flush system
- Max. inlet temperature 40°C

The high power MH 8P combines high pressure and high water flow for routine cleaning of large amounts of dirt in the agriculture, construction, transport or industrial segments. The MH 8P combines high cleaning effect with high rinsing and flushing effect.



TECHNICAL DATA	MH 8P-180/2000 FA	MH 8P-180/2000 FAX
Recommended avg. hours of constant use per day*	5	5
Pump pressure (bar/MPa)	180/18	180/18
Cleaning impact (kg/force)	10.6	10.6
Water flow Qmax/Qiec (l/h)	2000/1950	2000/1950
Water temperature (water/steam) (°C)	70/150	70/150
Max. inlet temperature (°C)	40	40
Fuel consumption at ΔT=45°C (kg/h)	8.8	8.8
Fuel tank (l)	30	30
Length x width x height (mm)	1188x700x1045	1188x700x1045
Weight (kg)	219	227
El cable (m)	5	5
Nozzle size	.1200	.1200
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HP-HOSE DN12X10M QC 3/8 AG NILFISK HW	101406186	
HP-HOSE DN12X15M QC 3/8 AG NILFISK HW		101406187
HOSE REEL NILFISK ACCESSORY		106403184
HIGH FLOW SPRAY HANDLE	106404530	106404530
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010
NOZZLE 1200 INDICATION RING CARAMELE	101119758	101119758
WATER FILTER COMPLETE	107144272	107144272
ITEM NO.	107146970	107146965

\* Based on 1-5 days use per week



### Cold water heavy-duty petrol and diesel pressure washers

- Robust long life pumps with ceramic pistons
- Robust design with aircraft aluminium chassis
- Wide range of performance levels
- Lightweight and manoeuvrable design
- Ergo accessory concept

The MC PE / DE range is ideal for use in areas where electrical power may not be available at all or not be strong enough to allow high power cleaning. Self priming and suction ability also means that water can be drawn from a tank or river. Ideal for use in building and construction, rental & agricultural segments.



TECHNICAL DATA	MC 3C-165/810 PE	MC 5M-195/1000 DE	MC 5M-225/910 PE PLUS	MC 5M-240/870 PE	MC 5M-250/1000 PE	MC 5M-250/1050 PE PLUS	MC 7P-220/1120 PE PLUS
Pump pressure (bar/MPa)	165/16.5	195/19.5	225/22.5	240/24	250/25	250/25	220/22
Cleaning impact (kg/force)	3.9	5.3	5.1	5	5.9	6.4	6.1
Water flow Qmax/Qiec (l/h)	810/750	1000/950	910/840	870/800	1000/930	1050/1000	1120/1010
Pump (RPM)	3490	1650	1750	3440	3400	1750	1700
Max. inlet temperature (°C)	60	60	60	60	60	60	80
Power source diesel		YANMAR L100 DE					
Power source Petrol	Honda GX200		Honda GX270	Honda GX270	Honda GX390	Honda GX390	Honda GX390
Ceramic pistons	3	3	3	3	3	3	4
Length x width x height (mm)	762x546x603	750x680x850	1067x686x660	1041x546x635	1041x646x635	1067x686x660	1067x686x660
Weight (kg)	27	110	41	45	45	68	93
Nozzle size	.0370	.0530	.0350	.0350	.0370	.0400	.0500
Motor power hp (kW)	6.5 (4.7)	10 (7.3)	9 (6.6)	9 (6.6)	13 (9.5)	13 (9.5)	13 (9.5)
Recommended avg. hours of use per day	3	5	5	5	5	5	6
FEATURES							
Petrol driven	•		•	•	•	•	•
Brass cylinder head	•	•	•	•	•	•	•
Pneumatic wheels	•		•	•	•	•	•
Belt drive			•			•	
Low pressure detergent system	•	•	•	•	•	•	•
Water flow regulation		•	•		•	•	•
Thermal dump valve	•	•	•	•	•	•	•
STANDARD EQUIPMENT							
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4		61369			61369	61369	61369
10 M WIRE HOSE DN6	301002275		301002275	301002275	301002275	301002275	
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.		101405770					101405770
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1000 BEND W/O NOZZLE		106403011				106403011	106403011
FLEXOPOWER PLUS 960 BEND W/O NOZZLE	106402282		106402282	106402282	106402282		
NOZZLE 0350 INDICATION RING BORDEAUX			101119736	101119736			
NOZZLE 0370 INDICATION RING BRONZE	101119737				101119737		
NOZZLE 0400 INDICATION RING METAL GREY						101119738	
NOZZLE 0500 INDICATION RING YELLOW							101119741
NOZZLE 0530 INDICATION RING RED		101119742					
ITEM NO.	106174801	106174740	106174804	106174803	106174805	106174806	106174807



## Hot water heavy-duty petrol and diesel pressure washers

- EcoPower boiler with > 92% efficiency with reduced running costs
- Slow running pumps either by belt drive or by direct gear reduction
- Integrated fuel tank
- Easy to use control panel
- Ergo accessory concept
- Honda petrol motors and Yanmar diesel engines
- Mobile units or trailer mounted
- Easy transport by forklift truck
- Low pump oil safety function
- Easy oil drain from pump and motor reduces maintenance costs
- Anti-calc/ water break tank as an option
- Optional wheel kit for larger models

The MH PE/DE is a comprehensive range of petrol and diesel powered hot water models for professional use in areas where electrical source is not available. Models can also typically draw water from tanks, wells or rivers giving a high level of use autonomy. The MH PE/DE range offers ideal solutions for hot water cleaning in construction and industrial segments, or by contract cleaners or public authorities.



TECHNICAL DATA	MH 5M-200/1000 DE	MH 5M-220/1000 PE	MH 7P-200/1200 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE
Pump pressure (bar/MPa)	200/20	220/22	200/20	220/22	220/22
Cleaning impact (kg/force)	5.1	5.4	6.6	6.1	7.2
Water flow Qmax/Qiec (l/h)	1000/900	1000/900	1200/1150	1120/1010	1300/1200
Pump (RPM)	1485	1700	1750	1775	1630
Max. inlet temperature (°C)	40	40	40	40	40
Water temperature (water/steam) (°C)	90/150	90/150	90/150	90/150	90/150
Power source diesel	Yanmar L100		Ruggerini		Mitsubishi S3L2
Power source Petrol		Honda GX390		Honda GX390	
Power consumption (kW)	10 HP/7.3 kW	13 HP/9.6 kW	16 HP/11.7 kW	13 HP/9.6 kW	16 HP/11.7 kW
Fuel consumption at ΔT=45°C (kg/h)	4.7	4.7	6.5	5.6	6.8
Fuel consumption, motor (l/h)	2.2	3.5	3.5	3.5	3.5
Fuel tank (l)	Boiler 57/Motor 5.5	Boiler 57/Motor 6.1	Boiler/Motor 57	Boiler 57/Motor 6.1	Boiler/Motor 57
Ceramic pistons	3	3	4	4	4
Length x width x height (mm)	970x780x1000	970x780x1000	1130x910x1050	970x780x1000	1130x910x1050
Weight (kg)	220	208	315	210	510
Nozzle size	.0450	.0450	.0650	.0500	.0640
FEATURES					
EcoPower boiler-high efficiency	•	•	•	•	•
Pump oil warning system	•	•	•	•	•
Service indicator	•	•	•	•	•
Electrical starting system	•	•	•	•	•
Thermal dump valve	•				
Flame sensor	•	•	•	•	•
Exhaust gas temperature sensor	•	•	•	•	•
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.	301001100	301001100		301001100	
HP HOSE DN10 150DEG L15000mm			1402064		1402064
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010
NOZZLE 0450 INDICATION RING LIGHT BLUE	101119740	101119740			
NOZZLE 0500 INDICATION RING YELLOW				101119741	
NOZZLE 0640 INDICATION RING GREEN					101119745
NOZZLE 0650 INDICATION RING LIGHT GREEN			101119746		
ITEM NO.	106239610	106239515	106239630	106239530	106239635



### A portable and stationary mounted unit all in one

- Powered by 1450 rpm high efficiency motor (50 Hz)
- Brass pump head
- 3 ceramic coated pistons
- Pressure activated unloader system
- Enclosed oil system
- Robust steel transport handle
- The unit can operate both in a vertical and in horizontal position
- Lightweight (compared to competition)

The SC UNO 4M is both a stationary and a portable unit. It is simple and intuitive to use and cost effective. Delivered with all the accessories it is ready for immediate use. Designed for heavy duty cleaning tasks the SC UNO 4M is a reliable choice for light agriculture, building and construction and automotive areas etc.



TECHNICAL DATA	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS
Recommended avg. hours of constant use per day*	2 - 3	2 - 3
Pump pressure (bar/MPa)	140/14	160/16
Cleaning impact (kg/force)	2.7	3.4
Water flow Qmax/Qiec (l/h)	620/560	720/660
Max. inlet temperature (°C)	60	60
Pump (RPM)	1450	1450
Length x width x height (mm)	480x240x340	480x240x340
Weight (kg)	34	34
Power consumption (kW)	2.9	3.5
Voltage/phase/frequency/current (V/~/HZ/A)	230/1/50/12.5	400/3/50/6.5
El cable (m)	5	5
Ceramic coated pistons	3	3
Nozzle size	.0340	.0400
FEATURES		
Robust steel chassis and frame	•	•
Ceramic coated pistons	•	•
Oil Sight outside Cabinet	•	•
Wall mountable	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
10 M WIRE HOSE DN6	301002275	301002275
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
FLEXOPOWER PLUS 960 BEND W/O NOZZLE	106402282	106402282
NOZZLE 0340 INDICATION RING VIOLET	101119735	
NOZZLE 0400 INDICATION RING METAL GREY		101119738
ITEM NO.	107340500	107340501

\* Based on 1-5 days use per week



## Stationary 1-pump high pressure washers for flexible cleaning

- NA6 and C3 high-quality heavy industrial motor pumps with brass pump heads
- 1450 rpm; 4 full ceramic pistons and double roller bearings
- It is possible to feed the units with hot inlet water from 70°C (with break tank) to 85°C (direct feed) for max. cleaning efficiency
- Powered by 1450 rpm (50 Hz) closed industrial motor
- NA5.2 reinforced wobble disc pump
- 3 ceramic pistons and brass pump head
- Foam sprayer for use of detergent on SC UNO 5M L
- Accessory kit for immediate plug & play use
- Low pump oil safety function and warning lamp
- Hour counter and service warning lamp
- NEO control system; enabling optional functions: Remote control, low water safety etc.

The SC UNO range of industrial stationary cold water high pressure washers is made up of the 5M, 5M L, 6P and 7P models. The range has been designed with innovative steps to meet the specific hygiene needs and to meet heavy-duty cleaning challenges with convincing performances. Furthermore, intuitive user functions and the opportunity to customise the machines with equipment suited for your environment ensure high productivity.



TECHNICAL DATA	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-170/1610	SC UNO 7P-180/1200
Recommended avg. hours of constant use per day*	4 - 5	4 - 5	7 - 8	7 - 8
Pump pressure (bar/MPa)	200/20	200/20	170/17	180/18
Cleaning impact (kg/force)	5.5	5.5	7.9	5.9
Water flow Qmax/Qiec (l/h)	1050/960	1050/960	1600/1500	1200/1080
Max. inlet temperature (°C)	60	60	80	80
Pump (RPM)	1450	1450	1450	1450
Length x width x height (mm)	355x860x560	355x860x560	355x860x560	355x860x560
Weight (kg)	74	74	84	81
Power consumption (kW)	6.1	6.1	8.8	6.7
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/13	400/3/50/13	400/3/50/16	400/3/50/15
Suction height - primed (m)	2.5	2.5	2.5	2.5
El cable (m)	5	5	5	5
Ceramic pistons	3	3	4	4
Nozzle size	.0500	.0500	.0900	.0640
FEATURES				
Pump oil warning system	•	•	•	•
Intelligent pump control system	•		•	•
Foam Sprayer		•		
Wall mountable	•	•	•	•
Foam Cabinet, EPP	•	•	•	•
Motor on-off lamp	•		•	•
Service warning lamp	•		•	•
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
QUICK COUPLING 3/4 W/GASKET	1602945	1602945	1602945	1602945
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770	101405770		
HOSE DN10 10 M 2W 3/8X3/8 INCH			6101766	6101766
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741		
NOZZLE 0640 INDICATION RING GREEN				101119745
NOZZLE 0900 INDICATION RING BROWN			101119752	
ITEM NO.	107340512	107340510	107340521	107340541

\* Based on 1-5 days use per week



## Stationary 2-pump high pressure washers for heavy cleaning tasks

- NA6 and C3 high-quality motor pumps with brass pump heads
- 1450 rpm; 4 full ceramic pistons and double roller bearings
- Water flow up to 2x1800 l/h
- 70°–85°C hot water inlet for max. cleaning efficiency
- Innovative hard foam cabinet - approved for the food industry
- Built on powder-coated steel frame
- Foam cabinet also reduces the noise level
- Foam cabinet can be removed without tools for direct access to pump
- Incl. low pump oil warning lamps, service warning lamp, hour counter, low pump oil safety

The performance level of the SC DUO 2-pump cold water high pressure washer range has significantly increased. Thanks to higher working pressure and increased water flow, even large heavy-duty cleaning jobs can be handled with ease. Built for use in excess of 6 hours per day, each model can be customised to meet your exact cleaning needs and ensure a lower Total Cost of Ownership.



TECHNICAL DATA	SC DUO 6P-170/3220	SC DUO 7P-180/2400
Recommended avg. hours of constant use per day*	7-8	7-8
Pump pressure (bar/MPa)	170/17	180/18
Cleaning impact (kg/force)	15.8	12.1
Water flow Qmax/Qiec (l/h)	3220/3000	2400/2240
Max. inlet temperature (°C)	80	85
Pump (RPM)	1450	1450
Length x width x height (mm)	355x860x1000	355x860x1000
Weight (kg)	180	160
Power consumption (kW)	18	16.4
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/31	400/3/50/31
Number of pumps	2	2
Ceramic pistons	4	4
Nozzle size	.0900	.0640
FEATURES		
Hour Meter	•	•
Pump oil warning system	•	•
Service indicator	•	•
Intelligent pump control system	•	•
Foam Cabinet, EPP	•	•
Motor on-off lamp	•	•
Service warning lamp	•	•
STANDARD EQUIPMENT		
NIPPLE F/QUICK COUPLING 3/8 SS	1603101	1603101
QUICK COUPLING 3/4 W/GASKET	1602945	1602945
ITEM NO.	107340600	107340620

\* Based on 1-5 days use per week



### Stationary high pressure washers for multiple users

- 3, 4 or 6 pumps for up to 12 users at one time
- Colour coded lances allow mixed use of low, medium and high pressure, detergent application
- Inlet water of up to 85°C into break tank and 70°C through pumps (80° as optional)
- Stainless steel design with high level of accessibility and serviceability
- Machine continues to run whilst individual pumps can be removed for service
- Intelligent start stop function for motor pumps depending on real-time demand from users
- Line pressures available from 80 to 160 bar
- Touch screen control panel & advanced diagnostics system

The SC DELTA is a multi-pump, multi-pressure system encompassing 3, 4 or 6 pumps - and allowing up to 12 people to work at any time. A stationary cold water unit for the heaviest cleaning applications in industry, slaughter houses, food & beverage industry, ship & offshore industry and large truck wash areas.



TECHNICAL DATA	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU
Recommended avg. hours of constant use per day*	>6	>6	>6
Pump pressure (bar/MPa)	160/16	160/16	160/16
Cleaning impact (kg/force)	22.4	29.7	43.9
Water flow Qmax/Qiec (l/h)	4380/4500	5820/6000	8580/9000
Max. inlet temperature (°C)	70	70	70
Pump (RPM)	1450	1450	1450
Length x width x height (mm)	970 x 1050 x 1800	970 x 1050 x 1800	970 x 1050 x 1800
Weight (kg)	349	408	526
Power consumption (kW)	27	35	55
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/48	400/3/50/64	400/3/50/96
Number of pumps	3	4	6
Ceramic pistons	4	4	4
Nozzle size	Min. .0350	Min. .0350	Min. .0350
FEATURES			
Stainless steel frame	•	•	•
Automatic standby	•	•	•
QuickService - innovative concept	•	•	•
Diagnostic system	•	•	•
Intelligent pump control system	•	•	•
Multi pressure lance system for low,medium or high pressure use	•	•	•
Finger touch control panel	•	•	•
ITEM NO.	107342000	107342002	107342005

\* Based on 1-5 days use per week



## Stationary high pressure washers for multiple users

- 3, 4 or 6 pumps for up to 12 users at one time
- Colour coded lances allow mixed use of low, medium and high pressure, detergent application
- Inlet water of up to 85°C into break tank and 70°C through pumps (80° as optional)
- Stainless steel design with high level of accessibility and serviceability
- Machine continues to run whilst individual pumps can be removed for service
- Intelligent start stop function for motor pumps depending on real-time demand from users
- Line pressures available from 80 to 100 bar
- Touch screen control panel & advanced diagnostics system

The SC DELTA is a multi-pump, multi-pressure system encompassing 3, 4 or 6 pumps - and allowing up to 12 people to work at any time. A stationary cold water unit for the heaviest cleaning applications in industry, slaughter houses, food, pharma & beverage industries. In general where a high water flow is needed.



TECHNICAL DATA	SC DELTA 8P 100/7500-3 400/3/50 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/1500-6 400/3/50 EU
Recommended avg. hours of constant use per day*	>6	>6	>6
Pump pressure (bar/MPa)	100/10	100/10	100/10
Cleaning impact (kg/force)	28.4	38.3	58.7
Water flow Qmax/Qiec (l/h)	7500/7020	10000/9480	15000/14520
Max. inlet temperature (°C)	70	70	70
Pump (RPM)	1450	1450	1450
Length x width x height (mm)	970 x 1050 x 1800	970 x 1050 x 1800	970 x 1050 x 1800
Weight (kg)	349	408	526
Power consumption (kW)	27	35	53
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/48	400/3/50/64	400/3/50/95
Number of pumps	3	4	6
Ceramic pistons	4	4	4
Nozzle size	Mix	Mix	Mix
FEATURES			
Stainless steel frame	•	•	•
QuickService - innovative concept	•	•	•
Diagnostic system	•	•	•
Intelligent pump control system	•	•	•
Multi pressure lance system for low,medium or high pressure use	•	•	•
NA6 - 4 ceramic piston pump	•	•	•
Stainless steel cabinet	•	•	•
ITEM NO.	107342001	107342004	107342007

\* Based on 1-5 days use per week



## Diesel powered stationary hot water pressure washers

- Brass cylinder head
- Expandable control technology with PLC and customisation is possible through options
- Automatic diagnosis and fault finding
- High efficiency, low cost heating system with EcoPower boiler system
- Galvanised and powder coated steel frame and cabinet
- Reduced running and service costs
- MMO - Multiple Machine Option (optional extra)

The SH SOLAR stationary hot water pressure washer range offers low heating and running costs combined with a design that is easy to use and service. Ideal for tough applications in automotive, industry, shipping and food sectors.



TECHNICAL DATA	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D
Recommended avg. hours of constant use per day*	7	7	7
Pump pressure (bar/MPa)	170/17	170/17	180/18
Cleaning impact (kg/force)	5.8	5.8	10.3
Water flow Qmax/Qiec (l/h)	1200/1110	1200/1110	2000/1900
Max. inlet temperature (°C)	30	30	30
Water temperature (water/steam) (°C)	99	99	70
Pump (RPM)	1450	1450	1450
Length x width x height (mm)	700x900x1077	700x900x1077	700x900x1077
Weight (kg)	215	215	232
Power consumption (kW)	8.8	8.8	12
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/17	400/3/50/17	400/3/50/18
Heating capacity (kW)	115	115	115
El cable (m)	4	4	4
Fuel consumption at ΔT=45°C (kg/h)	5.4	5.4	8.9
Ceramic pistons	4	4	3
Nozzle size	.0680	.0680	.1100
FEATURES			
EcoPower boiler-high efficiency	•	•	•
Automatic start/stop	•	•	•
1450 rpm motor	•	•	•
Galvanised steel frame	•	•	•
PLC and expandable control electronics	•	•	•
Auto fault finding	•	•	•
Water brake tank	•	•	•
ITEM NO.	107370070	107370077	107370080

\* Based on 1-5 days use per week



## Electrically heated stationary pressure washers

- Brass cylinder head
- Expandable control technology with PLC, and customisation possible through options
- Automatic diagnosis and fault finding
- Pollution free, heating system
- Galvanised and powder coated steel frame and cabinet
- Reduced running and service costs
- Large 119 litre heating tank for excellent heating capacity
- Available up to 54 kW heating
- C3 longlife pump with 4 ceramic pistons
- MMO - Multiple Machine Option (optional extra)

The SH SOLAR E range of stationary hot water pressure washers offers low heating and running costs combined with a design that is easy to use and service. Ideal for use in the automotive, industrial, food and shipping sectors. Electrical heating is exhaust gas and pollution free.



TECHNICAL DATA	SH SOLAR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 7P-170/1200 E54
Recommended avg. hours of constant use per day*	7	7	7	7	7
Pump pressure (bar/MPa)	135/13.5	170/17	170/17	170/17	170/17
Cleaning impact (kg/force)	3.8	5.8	5.8	5.8	5.8
Water flow Qmax/Qiec (l/h)	875/810	1200/1110	1200/1110	1200/1110	1200/1110
Max. inlet temperature (°C)	85	85	85	85	85
Max temperature (°C)	85	85	85	85	85
Water temperature, ΔT at full flow (°C)	19	14	28	42	42
Length x width x height (mm)	670x900x1077	670x900x1077	670x900x1077	670x900x1077	670x900x1077
Weight (kg)	150	155	155	156	161
Power consumption (kW)	5.8 + 18	7.5 + 18	7.5 + 36	7.5 + 54	7.5 + 54
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/36	400/3/50/39	400/3/50/65	400/3/50/91	440/3/60/91
Ceramic pistons	4	4	4	4	4
Nozzle size	.0530	.0680	.0680	.0680	.0680
Min. inlet water pressure at full flow (bar)	1	1	1	1	1
FEATURES					
Electrical heating system	•	•	•	•	•
Automatic start/stop	•	•	•	•	•
1450 rpm motor	•	•	•	•	•
Galvanised steel frame	•	•	•	•	•
PLC and expandable control electronics	•	•	•	•	•
Auto fault finding	•	•	•	•	•
Water brake tank	•	•	•	•	•
ITEM NO.	107370260	107370270	107370274	107370276	107370278

\* Based on 1-5 days use per week



## Gas powered stationary hot water pressure washers

- Brass cylinder head
- Expandable control technology with PLC, and customisation is possible through options
- Automatic diagnosis and fault finding
- Efficient gas heating systems
- Galvanised and powder coated steel frame and cabinet
- Reduced running and service costs
- MMO - Multiple Machine Option (optional extra)

The SH SOLAR range of stationary hot water pressure washers offers low heating and running costs combined with a design that is easy to use and service. Ideal for use in the automotive, industrial sectors or other sites possessing a gas supply line, avoiding the need to provide a diesel fuel supply.



TECHNICAL DATA	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G
Recommended avg. hours of constant use per day*	5	7
Pump pressure (bar/MPa)	150/15	170/17
Cleaning impact (kg/force)	4.5	5.8
Water flow Qmax/Qiec (l/h)	1020/900	1200/1110
Max. inlet temperature (°C)	30	30
Max temperature (°C)	99	99
Water temperature, ΔT at full flow (°C)	85	85
Pump (RPM)	1450	1450
Length x width x height (mm)	700x900x1100	700x900x1100
Weight (kg)	186	214
Power consumption (kW)	7.5	8.9
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/15	400/3/50/17
Heating capacity (kW)	93	100
Burner fuel type	NG	NG
Fuel consumption at ΔT=40°C (m³/h)	4.5	5.7
Ceramic pistons	3	4
Nozzle size	.0550	.0680
FEATURES		
Automatic start/stop	•	•
1450 rpm motor	•	•
Galvanised steel frame	•	•
PLC and expandable control electronics	•	•
Gas burner and coil	•	•
Auto fault finding	•	•
Water brake tank	•	•
ITEM NO.	107370450	107370470

\* Based on 1-5 days use per week



## Stationary hot water pressure washers for permanent outside placement

- Stainless steel robust design against corrosion
- EcoPower boiler for reduced fuel consumption costs
- Silent power, low noise level with 1450 rpm motor pump units
- Simple control panel with only 4 buttons
- ERGO accessories for added user friendliness
- Internal frost protection down to minus 20°C
- Compact design
- Available in both single-phase and three-phase formats

The SH TRUCK is a simple robust and corrosion proof stationary unit for permanent outdoor placement. Enabling constant cleaning of trucks, vans, commercial and construction vehicles, the SH TRUCK is even frost protected for use in winter.



TECHNICAL DATA	SH TRUCK 5M-180/970	SH TRUCK 5M-85/850	SH TRUCK 7P-175/1260
Recommended avg. hours of constant use per day*	5		7
Pump pressure (bar/MPa)	180/18	85/8.5	175/17.5
Cleaning impact (kg/force)	4.9	3	6.3
Water flow Qmax/Qiec (l/h)	970/930	850/800	1260/1170
Max. inlet temperature (°C)	30	30	30
Water temperature (water/steam) (°C)	90/150	90/150	90/150
Pump (RPM)	1450	1450	1450
Length x width x height (mm)	1025x715x1670	1025x715x1670	1025x715x1670
Weight (kg)	227	217	262
Power consumption (kW)	7.2	3.2	8.2
Voltage/phase/frequency/current (V~/Hz/A)	400/3/50/18	230/1/50/15.2	400/3/50/17.5
Fuel tank (l)	33	33	33
Detergent tank (l)	2 x 25	2 x 25	2 x 25
Ceramic pistons	3	3	4
Nozzle size	.0550	.0700	.0680
Fuel consumption, motor (Diesel) kg/h	4.3	3.8	5.3
FEATURES			
Stainless steel frame	•	•	•
Automatic standby	•	•	•
QuickService - innovative concept	•	•	•
Wdk dual detergent injector	•	•	•
Internal heater and insulation for frost protection	•	•	•
Flame sensor	•	•	•
Water brake tank	•	•	•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369
HOSE DN10 10 M 2W 3/8X3/8 INCH	6101766	6101766	6101766
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010
NOZZLE 0550 INDICATION RING NEONGREEN	101119743		
NOZZLE 0680 INDICATION RING GREY			101119747
NOZZLE 0700 INDICATION RING ORANGE		101119748	
ITEM NO.	107370830	107370840	107370810

\* Based on 1-5 days use per week



## Innovative technology for quicker payback time on self service washes

- Low wear and tear and service requirements reduce maintenance costs
- Low daily run costs through reduced fuel, water and electrical consumption
- Available with steel and stainless steel coils in diesel fired models for areas with hard or soft water
- Available with electrical heating system for pollution free cleaning
- Ergonomical and pressure relieved accessories for extra comfort in use
- Low noise levels

The SH AUTO 5M is a range of stationary self service wash units equipped with innovative frequency modulated motor technology. The ideal pressure washer unit for equipping service stations or car dealerships with a self service wash site.



TECHNICAL DATA	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E
Recommended avg. hours of constant use per day*	8	8
Pump pressure (bar/MPa)	100/10	100/10
Cleaning impact (kg/force)	2	2
Water flow Qmax/Qiec (l/h)	500/500	500/500
Max. inlet temperature (°C)	30	30
Water temperature (water/steam) (°C)	20-60	20-60
Pump (RPM)	44-1160	44-1160
Length x width x height (mm)	725x1090x1635	725x1090x1635
Weight (kg)	204	182
Power consumption (kW)	6.4	16.8
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/Variable	400/3/Variable
Fuel consumption at ΔT=45°C (kg/h)	2.6	
Fuel tank (l)	33	
Detergent tank (l)	2 x 25	2 x 25
Ceramic pistons	3	3
Nozzle size	.0370	.0370
FEATURES		
EcoPower boiler-high efficiency	•	
Electrical heating system		•
Internal heater and insulation for frost protection	•	•
Diesel version	•	
Stainless steel boiler	•	
Delayed automatic start stop	•	•
Stainless steel cabinet	•	•
STANDARD EQUIPMENT		
HOSE NOZZLE 20R3/4	61369	61369
HIGH PRESSURE HOSE DN6X8200MM	101405641	101405641
WINTER GUN 12 BAR	106402243	106402243
UNIVERSAL PLUS 1080 BENT 170 F. BRUSH	106403037	106403037
NOZZLE 0370 INDICATION RING BRONZE	101119737	101119737
SELF-SERVICE BRUSH AUTO	106402241	106402241
ITEM NO.	107370882	107370884

\* Based on 1-5 days use per week



# Accessories for Industrial Pressure Washers

Item no.	
MH 4M-210/1000 PAX	
MH 5M-100/760 PA UK	
MH 5M-100/760 PA UK	
MH 5M-210/1100 PAX	
MH 5M-180/800 PA E12	
MH 5M-180/800 PA E24	
MH 6P-175/1250 FA	
MH 6P-175/1250 FAX	
MH 6P-200/1300 FA	
MH 6P-200/1300 FAX	
MH 7P-180/1260 FA	
MH 7P-180/1260 FAX	
MH 8P-180/2000 FA	
MH 8P-180/2000 FAX	
MC 3C-165/810 PE	
MC 5M-195/1000 DE	
MC 5M-225/910 PE PLUS	
MC 5M-240/870 PE	
MC 5M-250/1000 PE	
MC 5M-250/1050 PE PLUS	
MC 7P-220/1120 PE PLUS	
MH 5M-200/1000 DE	
MH 5M-220/1000 PE	
MH 7P-200/1200 DE	
MH 7P-220/1200 PE	
MH 7P-220/1300 DE	
SC UNO 4M-140/620 PS	
SC UNO 4M-160/720 PS	
SC UNO 5M-200/1050	
SC UNO 5M-200/1050 L	
SC UNO 6P-70/1610	
SC UNO 7P-180/1200	
SC DUO 6P-70/3220	
SC DUO 7P-180/2400	
SC DELTA 6P-160/4500-3 EU	
SC DELTA 6P-160/6000-4 EU	
SC DELTA 6P-160/9000-6 EU	
SC DELTA 8P-100/10000-4 EU	
SC DELTA 8P-100/15000-6 EU	
SC DELTA 8P-100/7500-3 EU	
SH SOLAR 7P-170/1200 D	
SH SOLAR 7P-170/1200 DSS	
SH SOLAR 8P-180/2000 D	
SH SOLAR 7P-135/875 E18	
SH SOLAR 7P-170/1200 E18	
SH SOLAR 7P-170/1200 E36	
SH SOLAR 7P-170/1200 E54 440V	
SH SOLAR 5M-150/1020 G	
SH SOLAR 7P-170/1200 G	
SH TRUCK 5M-180/970	
SH TRUCK 5M-85/850	
SH TRUCK 7P-175/1260	
SH AUTO 5M-100/500 DS	
SH AUTO 5M-100/500 E	

- Standard equipment
- Supplementary accessories
- Mountable equipment



- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers

Item no.
MH 4M-210/1000 PAX MH 5M-100/760 PA UK MH 5M-100/760 PA UK MH SM-210/1100 PAX MH SM-180/800 VA E12 MH SM-180/800 PA E24 MH 6P-175/1250 FA MH 6P-175/1250 FA MH 6P-200/1300 FA MH 6P-200/1300 FA MH 6P-180/1260 FA MH 6P-180/1260 FA MH 8P-180/2000 FA MH 8P-180/2000 FA MC 5C-165/610 PE MC 5M-195/1000 DE MC 5M-225/910 DE PLUS MC 5M-240/870 PE MC 5M-250/1000 PE MC 5M-250/1050 PE PLUS MC 5P-220/1120 PE PLUS MH SM-200/1000 DE MH SM-220/1000 PE MH 7P-200/1200 DE MH 7P-220/120 PE MH 7P-220/1300 DE SC UNO 4M-140/620 PS SC UNO 4M-160/720 PS SC UNO 5M-200/1050 SC UNO 5M-200/1050 L SC UNO 6P-170/1610 SC UNO 7P-180/1200 SC DUO 6P-170/3220 SC DUO 7P-180/2400 SC DELTA 6P-160/4500-3 EU SC DELTA 6P-160/6000-4 EU SC DELTA 6P-160/9000-6 EU SC DELTA 8P-100/1000-4 EU SC DELTA 8P-100/15000-6 EU SC DELTA 8P-100/7500-3 EU SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DSS SH SOLAR 8P-180/2000 D SH SOLAR 7P-150/875 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E36 SH SOLAR 7P-170/1200 E54 400V SH SOLAR 7P-170/1200 E54 440V SH SOLAR 5M-150/1020 G SH SOLAR 7P-170/1200 G SH TRUCK 5M-180/970 SH TRUCK 5M-85/850 SH TRUCK 7P-175/1260 SH AUTO 5M-100/500 DSS SH AUTO 5M-100/500 E
1718
61369
1602945
1719
1716
101118105
106411177
106411178
106411184
4809131
6465
301002275
101405641
126528620
6528613
101406176
101117763

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers

Item no.
MH 4M-21/01/100 PAX MH 5M-100/760 PA UK MH 5M-100/760 PAX UK MH 5M-210/1100 PAX MH 5M 180/800 FA E12 MH 5M 180/800 FA E24 MH 6P-175/1250 FA MH 6P-175/1250 FAX MH 6P-200/1300 FA MH 7P-180/1260 FA MH 7P-180/1260 FAX MH 8P-180/2000 FA MH 8P-180/2000 FAX MC 3C-165/810 PE MC 5M-125/1000 DE MC 5M-225/910 PE PLUS MC 5M-240/870 PE MC 5M-250/1000 PE MC 5M-250/1050 PE PLUS MC 7P-220/1120 PE PLUS MH 5M-200/1000 DE MH 5M-220/1000 PE MH 7P-200/1200 DE MH 7P-220/1120 PE MH 7P-220/1300 DE SC UNO AM-140/620 PS SC UNO AM-160/720 PS SC UNO AM-200/1050 SC UNO AM-200/1050 L SC UNO 8P-170/1610 SC UNO 7P-180/1200 SC DUO 6P-70/3220 SC DUO 7P-180/2400 SC DELTA 6P 160/4500-3 EU SC DELTA 6P 160/6000-4 EU SC DELTA 6P 160/9000-6 EU SC DELTA 8P 100/1000-4 EU SC DELTA 8P 100/15000-6 EU SC DELTA 8P 100/7500-3 EU SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DSS SH SOLAR 8P-180/2000 D SH SOLAR 7P-135/875 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E36 SH SOLAR 7P-170/1200 E54 400V SH SOLAR 7P-170/1200 E54 440V SH SOLAR 5M-150/1020 G SH SOLAR 7P-170/1200 G SH TRUCK 5M-180/970 SH TRUCK 5M-85/850 SH TRUCK 7P-175/1260 SH AUTO 5M-100/500 DS SH AUTO 5M-100/500 E
101406175
107142542
101406058
101406069
301001100
301001101
1405569
101405770
1405666
101406102
1402924
1402932
1402940
1402080
1402098
1402759
6101766

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment

## Accessories for Industrial Pressure Washers

Item no.	
MH 4M-210/100 PAX	
MH 5M-100/760 PA UK	
MH 5M-100/760 PAX UK	
MH 5M-210/100 PAX	
MH 5M 180/800 PA E12	
MH 5M 180/800 PA E24	
MH 6P-175/1250 FA	
MH 6P-175/1250 FAX	
MH 6P-200/1300 FA	
MH 6P-200/1300 FAX	
MH 7P-180/1260 FA	
MH 7P-180/1260 FAX	
MH 8P-180/2000 FA	
MH 8P-180/2000 FAX	
MC 3C-165/810 PE	
MC 5M-125/1000 DE	
MC 5M-225/910 PE PLUS	
MC 5M-240/870 PE	
MC 5M-250/1000 PE	
MC 5M-250/1050 PE PLUS	
MC 7P-220/1120 PE PLUS	
MH 5M-200/1000 DE	
MH 5M-220/1000 PE	
MH 7P-200/1200 DE	
MH 7P-220/1120 PE	
MH 7P-220/1300 DE	
SC UNO 4M-140/620 PS	
SC UNO 4M-160/720 PS	
SC UNO 5M-200/1050	
SC UNO 5M-200/1050 L	
SC UNO 6P-170/1610	
SC UNO 7P-180/1200	
SC DUO 6P-70/3220	
SC DUO 7P-180/2400	
SC DELTA 6P 160/4500-3 EU	
SC DELTA 6P 160/6000-4 EU	
SC DELTA 6P 160/9000-6 EU	
SC DELTA 8P 100/1000-4 EU	
SC DELTA 8P 100/15000-6 EU	
SC DELTA 8P 100/7500-3 EU	
SH SOLAR 7P-170/1200 D	
SH SOLAR 7P-170/1200 DSS	
SH SOLAR 8P-180/2000 D	
SH SOLAR 7P-135/875 E18	
SH SOLAR 7P-170/1200 E18	
SH SOLAR 7P-170/1200 E36	
SH SOLAR 7P-170/1200 E54 400V	
SH SOLAR 7P-170/1200 E54 440V	
SH SOLAR 5M-150/1020 G	
SH SOLAR 7P-170/1200 G	
SH TRUCK 5M-180/970	
SH TRUCK 5M-85/850	
SH TRUCK 7P-175/1260	
SH AUTO 5M-100/500 DS	
SH AUTO 5M-100/500 E	

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment




# Accessories for Industrial Pressure Washers

Item no.
MH 4M-210/1000 PAX MH 5M-100/760 PA, UK MH 5M-100/760 PAX UK MH 5M-210/1100 PAX MH 3M-180/800 PA E12 MH 3M-180/800 PA E24 MH 6P-175/1250 FA MH 6P-175/1250 PAX MH 6P-200/1300 FA MH 6P-200/1300 FAX MH 7P-180/1250 FA MH 7P-180/1250 PAX MH 8P-180/2000 FA MH 8P-180/2000 FAX MC 3C-165/810 PE MC 5M-185/1000 DE MC 5M-225/910 PE PLUS MC 5M-240/870 PE MC 5M-250/1000 PE MC 5M-250/1050 PE PLUS MC 7P-220/1120 PE PLUS MH 5M-200/1000 DE MH 5M-220/1000 PE MH 7P-200/1200 DE MH 7P-220/1120 PE MH 7P-220/1300 DE SC UNO 4M-140/620 PS SC UNO AM-160/720 PS SC UNO 5M-200/1050 SC UNO RP-70/1510 SC UNO 7P-180/1200 SC DUO 6P-70/3220 SC DUO P-180/2400 SC DELTA 6P-160/4500-3 EU SC DELTA 6P-160/6000-4 EU SC DELTA 6P-160/9000-6 EU SC DELTA 8P-100/1000-4 EU SC DELTA 8P-100/15000-6 EU SC DELTA 8P-100/7500-3 EU SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DSS SH SOLAR 8P-180/2000 D SH SOLAR 7P-125/875 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E36 SH SOLAR 7P-170/1200 E54 400V SH SOLAR 5M-150/1020 G SH SOLAR 7P-170/1200 G SH TRUCK 5M-180/970 SH TRUCK 5M-85/850 SH TRUCK 7P-175/1260 SH AUTO 5M-100/500 DSS SH AUTO 5M-100/500 E
106403036
106403035
106403037
106403034
106403077
106403002
106402290
106402291
106402292
106402293
106402294
106403078
106403001
106403003
106408250
106408251
106408252
106408253

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



4-in-1 Lance

4-IN-1 LANCE INCL 0435 ALUMINUM HEAD



LANCE FOR 4-IN-1 880 BEND

Short Lance

DOUBLE LANCE L10CM 1505



DOUBLE LANCE SHORT 1506 100MM



DOUBLE LANCE W/O NOZZLE 90MM



SINGLE LANCE W/O NOZZLE 90MM



Special Lance

CURVED LANCE L1090 MM



LANCE SINGLE 1500MM W/O NOZZLE



UNDER CARRIAGE WASHER 40065



LANCE WITH BAYONET COUPL



TurboHammer Nozzle

NOZZLE TURBOHAMMER HEAD .0450 W11



NOZZLE TURBOHAMMER HEAD .0550 W11



TURBOHAMMER NOZZLE W11 050



TURBOHAMMER NOZZLE W11 060



TURBOHAMMER NOZZLE W11 070



TURBOHAMMER NOZZLE W11 1000



TURBOHAMMER NOZZLE W12 035



TURBOHAMMER NOZZLEHEAD W12 0370

MC 2C-120/520 UK	MC 2C-140/610 UK	MC 3C-140/570 UK	MC 3C-150/570 XT UK	MC 3M-100/770 UK	MC 3M-140/620 UK	MC 3M-180/840 XT	MC 3M-200/1000 XT	MC 3M-200/1050 400V	MC 3M-200/1050 220 - 440V	MC 3M-200/1050 FA	MC 3M-200/1050 XT	MC 3M-220/1130 400V	MC 3M-220/1130 220 - 440V	MC 3M-220/1130 FA	MC 3M-220/1130 XT	MC 3M-270/1600 FA	MC 3P-170/1600 FA/XT	MC 3P-170/1600 FA/400V	MC 3P-195/1280 FA/230V	MC 3P-195/1280 FA/XT	MC 3P-195/1280 BBFA	MC 3P-195/1280 FA	MC 3P-195/1280 FF	MC 3P-195/1280 FA/2500	MC 3P-160/2500 ST	MC 3P-180/2100	MH 3C-90/670 PAX	MH 3M-100/600 PA UK	MH 3M-100/680 PA UK	MH 4M-100/680 PA UK
------------------	------------------	------------------	---------------------	------------------	------------------	------------------	-------------------	---------------------	---------------------------	-------------------	-------------------	---------------------	---------------------------	-------------------	-------------------	-------------------	----------------------	------------------------	------------------------	----------------------	---------------------	-------------------	-------------------	------------------------	-------------------	----------------	------------------	---------------------	---------------------	---------------------

● Standard equipment  
○ Supplementary accessories  
□ Mountable equipment

# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment



# Accessories for Industrial Pressure Washers



Item no.
MH 4M-210/1000 PAX MH 5M-100/760 PA UK MH 5M-100/760 PA E24 MH 5M-210/1100 PAX MH 5M-180/800 VA E12 MH 6P-175/1250 FA MH 6P-175/1250 FAX MH 6P-200/1300 FA MH 6P-200/1300 FAX MH 6P-180/1260 FA MH 6P-180/1260 FAX MH 6P-180/2000 FA MH 6P-180/2000 FAX MC 5C-165/610 PE MC 5M-195/1000 DE MC 5M-225/910 PE PLUS MC 5M-240/870 PE MC 5M-250/1000 PE MC 5M-250/1050 PE PLUS MC 5P-220/1120 PE PLUS MH 5M-200/1000 DE MH 5M-220/1000 PE MH 7P-200/1200 DE MH 7P-220/120 PE MH 7P-220/1300 DE SC UNO 4M-140/620 PS SC UNO 4M-160/720 PS SC UNO 5M-20/07050 SC UNO 5M-20/01050 L SC UNO 6P-170/1610 SC UNO 7P-180/1200 SC DUO 6P-170/3220 SC DUO 7P-180/2400 SC DELTA 6P-160/6500-3 EU SC DELTA 6P-160/6600-4 EU SC DELTA 6P-160/9000-6 EU SC DELTA 8P-100/1000-4 EU SC DELTA 8P-100/15000-6 EU SC DELTA 8P-100/7500-3 EU SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DSS SH SOLAR 8P-180/2000 D SH SOLAR 7P-150/875 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E36 SH SOLAR 7P-170/1200 E54 400V SH SOLAR 7P-170/1200 E54 440V SH SOLAR 5M-150/1020 G SH SOLAR 7P-170/1200 G SH TRUCK 5M-180/970 SH TRUCK 5M-85/850 SH TRUCK 7P-175/1260 SH AUTO 5M-100/500 DSS SH AUTO 5M-100/500 E
65437
49285
301001108
49287
7815
15440
17387
7819
7820
41394
7811
1507
8097
2504
8528
7814
2506

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



Standard Nozzle 25° 1/8" NPT

HP NOZZLE 25070 1/8 INCH NPT



MC 2C-120/520 UK	MC 2C-140/610 UK	MC 3C-140/570 UK	MC 4C-150/570 XT UK	MC 4M-100/570 UK	MC 4M-140/620 UK	MC 4M-140/620 XT UK	MC 5M-100/770 XT	MC 5M-180/840	MC 5M-180/840 XT	MC 5M-200/1000	MC 5M-200/1000 XT	MC 5M-200/1050 400V	MC 5M-200/1050 220 - 440V	MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130 400V	MC 5M-220/1130 FA	MC 5M-220/1130 XT	MC 6P-170/1600 FA	MC 6P-170/1600 FA XT	MC 6P-180/1300 FA	MC 6P-180/1300 FA XT	MC 6P-250/1100 FA	MC 6P-250/1100 FA XT	MC 7P-195/1280 FA 400V	MC 7P-195/1280 FA 230V	MC 7P-195/1280 FA XT	MC 8P-195/1280 BBFA	MC 8P-195/1280 FA	MC 8P-160/2500	MC 8P-160/2500 ST	MC 8P-180/2100	MH 3C-90/670 PAX	MH 4M-100/600 PA UK	MH 4M-100/680 PA UK	MH 4M-100/680 PAX UK
------------------	------------------	------------------	---------------------	------------------	------------------	---------------------	------------------	---------------	------------------	----------------	-------------------	---------------------	---------------------------	-------------------	-------------------	---------------------	-------------------	-------------------	-------------------	----------------------	-------------------	----------------------	-------------------	----------------------	------------------------	------------------------	----------------------	---------------------	-------------------	----------------	-------------------	----------------	------------------	---------------------	---------------------	----------------------

Standard Nozzle 50° 1/8" NPT

HP NOZZLE 50040 1/8



○ ○

HP NOZZLE 50060 1/8 INCH NPT



HP NOZZLE 50070 1/8



HP NOZZLE 50080 1/8



Tornado Nozzle with Indication Ring

NOZZLE 0275 W. INDICATION RING DARK BROW



○ ○ ○ ○

NOZZLE 0300 W. INDICATION RING WARM ORAN



○ ○ ○ ○

NOZZLE 0340 INDICATION RING VIOLET



○

●

NOZZLE 0350 INDICATION RING BORDEAUX



●

○

●

NOZZLE 0370 INDICATION RING BRONZE



○

NOZZLE 0400 INDICATION RING METAL GREY



●

●

NOZZLE 0435 INDICATION RING BLUE



●

NOZZLE 0450 INDICATION RING LIGHT BLUE



●

●

TORNADO NOZZLE 0475



●

●

NOZZLE 0500 INDICATION RING YELLOW



●

●

●

●

●

●

●

NOZZLE 0530 INDICATION RING RED



●

NOZZLE 0550 INDICATION RING NEONGREEN



NOZZLE 0640 INDICATION RING GREEN



- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers

- Standard equipment
- Supplementary accessories
- Mountable equipment



# Accessories for Industrial Pressure Washers

Item no.
MH 4M-210/1000 PAX MH 5M-100/760A UK MH 5M-100/760PAX UK MH 5M-210/1100 PAX MH 3M 180/800/PA/E12 MH 3M 180/800/PA/E24 MH 6P-175/1250 FA MH 6P-175/1250 FAX MH 6P-200/1300 FA MH 6P-200/1300 FAX MH 7P-180/1260 TA MH 7P-180/1260 FAX MH 8P-180/2000 FA MH 8P-180/2000 FAX MC 5C-165/810 PE MC 5M-195/1000 DE MC 5M-225/910 PE PLUS MC 5M-240/870 PE MC 5M-250/1000 PE MC 5M-250/1050 PE PLUS MC 7P-220/1120 PE PLUS MH 5M-260/1000 DE MH 5M-220/1000 PE MH 7P-200/1200 DE MH 7P-220/120 PE MH 7P-220/1300 DE SC UNO 4M-140/620 PS SC UNO 4M-160/720 PS SC UNO 5M-20/1050 SC UNO 5M-200/1050 L SC UNO 6P-170/1610 SC UNO 7P-180/1200 SC DUO 6P-170/3220 SC DUO 7P-180/2400 SC DELTA 6P 160/4500-3 EU SC DELTA 6P 160/6000-4 EU SC DELTA 6P 160/9000-6 EU SC DELTA 8P 100/1000-4 EU SC DELTA 8P 100/15000-5 EU SC DELTA 8P 100/7500-3 EU SH SOLAR 7P-170/1200 DSS SH SOLAR 8P-180/2000 D SH SOLAR 7P-155/875 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E36 SH SOLAR 7P-170/1200 E54 400V SH SOLAR 7P-170/1200 E54 440V SH SOLAR 5M-150/1020 G SH SOLAR 7P-170/1200 G SH TRUCK 5M-180/970 SH TRUCK 5M-85/850 SH TRUCK 7P-175/1260 SH AUTO 5M-100/500 DSS SH AUTO 5M-100/500 E
101119746
101119747
101119748
101119751
101119755
101119754
101119756
101119757
301150004
106402425
101119752
101119749
101118130
101118131
101118132
15861

- Standard equipment
- Supplementary accessories
- Mountable equipment



## Special Nozzle

NOZZLE FOR LONG LANCEJET 6-7 M



NOZZLE PROTECTION CAP PA



**VARIO NOZZLE HL-I 1/8-27N**



**VARIO-NOZZLE CASING 1/8**

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers

- Standard equipment
- Supplementary accessories
- Mountable equipment



# Accessories for Industrial Pressure Washers

Item no.	
MH 4M-210/1000 PAX	
MH 5M-100/760 PA UK	
MH 5M-100/760 PA UK	
MH 5M-210/1100 PAX	
MH 5M-180/800 PA E12	
MH 5M-180/800 PA E24	
MH 6P-175/1250 FA	
MH 6P-175/1250 FA	
MH 6P-200/1300 FA	
MH 6P-200/1300 FA	
MH 7P-180/1260 FA	
MH 7P-180/1260 FA	
MH 8P-180/2000 FA	
MH 8P-180/2000 FA	
MH 8P-180/2000 FA	
MC 3C-165/810 PE	
MC 3M-195/1000 DE	
MC 3M-225/910 PE PLUS	
MC 3M-240/870 PE	
MC 3M-250/1050 PE	
MC 3M-250/1050 PE PLUS	
MC 3P-220/1120 PE PLUS	
MH 3M-200/1000 DE	
MH 3M-220/1000 PE	
MH 3P-200/1200 DE	
MH 3P-220/1200 PE	
MH 3P-220/1300 DE	
SC UNO 4M-140/620 TS	
SC UNO 4M-160/720 PS	
SC UNO 5M-200/050	
SC UNO 5M-200/050 L	
SC UNO 6P-70/1610	
SC UNO 7P-180/1200	
SC DUO 6P-170/3220	
SC DUO 7P-180/2400	
SC DELTA 6P 160/650-3 EU	
SC DELTA 6P 160/600-4 EU	
SC DELTA 6P 160/900-6 EU	
SC DELTA 8P 100/1000-4 EU	
SC DELTA 8P 100/1500-6 EU	
SC DELTA 8P 100/750-3 EU	
SH SOLAR 7P-170/200 D	
SH SOLAR 7P-170/200 DSS	
SH SOLAR 8P-180/2000 D	
SH SOLAR 7P-135/875 E18	
SH SOLAR 5M-150/1020 G	
SH SOLAR 7P-170/200 E36	
SH SOLAR 7P-170/200 E54 400V	
SH SOLAR 7P-170/200 E54 440V	
SH TRUCK 5M-180/970	
SH TRUCK 5M-85/850	
SH TRUCK 7P-175/1260	
SH AUTO 5M-100/500 DSS	
SH AUTO 5M-100/500 E	

- Standard equipment
- Supplementary accessories
- Mountable equipment



# Accessories for Industrial Pressure Washers

Item no.	
MH 4M-210/1000 PAX	
MH 5M-100/760 PA UK	
MH 5M-100/760 PAX UK	
MH 5M-210/1100 PAX	
MH 5M 180/800 PA E12	
MH 5M 180/800 PA E24	
MH 6P-175/1250 FA	
MH 6P-175/1250 FAX	
MH 6P-200/1300 FA	
MH 6P-200/1300 FAX	
MH 7P-180/1260 FA	
MH 7P-180/1260 FAX	
MH 8P-180/2000 FA	
MH 8P-180/2000 FAX	
MC 3C-165/810 PE	
MC 5M-195/1000 DE	
MC 5M-225/910 PE PLUS	
MC 5M-240/870 PE	
MC 5M-250/1000 PE	
MC 5M-250/1050 PE PLUS	
MC 7P-220/1120 PE PLUS	
MH 5M-200/1000 DE	
MH 5M-220/1000 PE	
MH 7P-200/1200 DE	
MH 7P-220/1200 PE	
MH 7P-220/1300 DE	
SC UNO AM-140/620 PS	
SC UNO 4M-160/720 PS	
SC UNO 5M-200/1050	
SC UNO AM-200/1050 L	
SC UNO 8P-70/1610	
SC UNO 7P-180/1200	
SC DUO 8P-70/3220	
SC DUO 7P-180/2400	
SC DELTA 8P-160/4500-3 EU	
SC DELTA 6P-160/6000-4 EU	
SC DELTA 6P-160/9000-6 EU	
SC DELTA 8P-100/10000-4 EU	
SC DELTA 8P-100/15000-6 EU	
SC DELTA 8P-100/7500-3 EU	
SH SOLAR 7P-170/1200 D	
SH SOLAR 7P-170/1200 DSS	
SH SOLAR 8P-180/2000 D	
SH SOLAR 7P-135/875 E18	
SH SOLAR 7P-170/1200 E18	
SH SOLAR 7P-170/1200 E36	
SH SOLAR 7P-170/1200 E54 400V	
SH SOLAR 5M-150/1020 G	
SH SOLAR 7P-170/1200 G	
SH TRUCK 5M-180/970	
SH TRUCK 5M-85/850	
SH TRUCK 7P-175/1260	
SH AUTO 5M-100/500 DS	
SH AUTO 5M-100/500 E	

- Standard equipment
- Supplementary accessories
- Mountable equipment



## Injector and Foam Sprayer

NII FISK FOAMSPAYER VARIO HE 0950



- Standard equipment
- Supplementary accessories
- Mountable equipment


# Accessories for Industrial Pressure Washers



# Accessories for Industrial Pressure Washers



- Standard equipment
- Supplementary accessories
- Mountable equipment



**Stationary Equipment**

OPTION 1XMANUEL DETERGENT

MIC 2C-120/520 UK	MIC 2C-140/610 UK	MIC 3C-140/570 UK	MIC 3C-150/570 XT UK	MIC 4C-100/5770 UK	MIC 4M-140/620 UK	MIC 4M-140/620 XT UK	MIC 5M-180/840 XT	MIC 5M-200/1000 XT	MIC 5M-200/1000 XT	MIC 5M-200/1050 400V	MIC 5M-200/1050 220 - 440V	MIC 5M-200/1050 FA	MIC 5M-200/1050 XT	MIC 5M-220/1130 400V	MIC 5M-220/1130 220 - 440V	MIC 5M-220/1130 FA	MIC 5M-220/1130 XT	MIC 6P-170/1600 FA	MIC 6P-170/1600 FA XT	MIC 6P-180/1300 FA	MIC 6P-180/1300 FA XT	MIC 6P-250/1100 FA XT	MIC 7P-195/1280 FA 400V	MIC 7P-195/1280 FA 230V	MIC 7P-195/1280 FA XT	MIC 7P-195/1280 BBFA	MIC 7P-195/1280 FA	MIC 8P-160/2500 ST	MIC 8P-180/2100	MH-JC-90/670 PAX	MH-AM-100/600 PA UK	MH-AM-100/680 PA UK	MH-AM-100/680 PAX UK
-------------------	-------------------	-------------------	----------------------	--------------------	-------------------	----------------------	-------------------	--------------------	--------------------	----------------------	----------------------------	--------------------	--------------------	----------------------	----------------------------	--------------------	--------------------	--------------------	-----------------------	--------------------	-----------------------	-----------------------	-------------------------	-------------------------	-----------------------	----------------------	--------------------	--------------------	-----------------	------------------	---------------------	---------------------	----------------------

**OPTION 2XDETERGENT SOLAR**

**OPTION AUTOMATIC PRESSURE RELIEF SOLAR**

**OPTION CLOSED AIR INTAKE SOLAR G**



**OPTION CLOSED CIRCUIT FROST PROTECTION K**

**OPTION COLD/WARM SWITCH SOLAR EH**

**OPTION INSULATION CABINET**

**OPTION LOW WATER SECURITY**



**OPTION MULTI MACHINE CONNEC. BOX SOLAR**

**OPTION NO SCALE**

**OPTION NO-SCALE SOLAR**

**OPTION REMOTE CONTROL 4 BUTTONS**

**OPTION REMOTE CONTROL 5 BUTTONS**

**OPTION STAINLESS STEEL PARTS SOLAR D/EH**

**OPTION WATER INLET SECURITY**

**OPTION WATER SOFTENER UNIT**



**REMOTE CONTROL BOXES 2 BUTTONS**

**REMOTE CONTROL BOXES 3 BUTTONS**

**TOKENS Ø22.0X2.3 SET-50**


# Accessories for Industrial Pressure Washers



Item no.
MH 4N-21/01/1000 PAX MH 5M-100/760 PA UK MH 5M-100/760 PAX UK MH 5M-210/1100 PAX MH 5W 180/800 FA E12 MH 5W 180/800 FA E24 MH 6P-175/1250 FA MH 6P-175/1250 FAX MH 6P-200/1300 FA MH 6P-200/1300 FAX MH 7P-180/1260 FA MH 7P-180/1260 FAX MH 8P-180/2000 FA MH 8P-180/2000 FAX MC 3C-165/810 PE MC 5W-195/1000 DE MC 5W-225/910 PE PLUS MC 5W-240/870 PE MC 5W-250/1000 PE MC 5W-250/1050 PE PLUS MC 7P-220/1120 PE PLUS MH 5M-200/1000 DE MH 5M-220/1000 PE MH 7P-200/1200 DE MH 7P-220/1120 PE MH 7P-220/1300 DE SC LINDA AM-140/620 PS SC LINDO AM-160/720 PS SC UNO 2M-200/1050 SC UNO 2M-200/1050L SC UNO 6P-170/1610 SC UNO 7P-80/1200 SC DUO 6P-170/3220 SC DUO 7P-180/2400 SC DELTA 6P 160/4500-3 EU SC DELTA 6P 160/6000-4 EU SC DELTA 6P 160/9000-6 EU SC DELTA 8P 100/1000-4 EU SC DELTA 8P 100/15000-6 EU SC DELTA 8P 100/7500-3 EU SH-SOLAR 7P-170/1200 D SH-SOLAR 7P-170/1200 DSS SH-SOLAR 8P-180/2000 D SH-SOLAR 7P-170/1500-6 EU SH-SOLAR 7P-170/1200 E18 SH-SOLAR 7P-170/1200 E36 SH-SOLAR 7P-170/1200 E54 400V SH-SOLAR 7P-170/1200 E54 440V SH-SOLAR 5M-150/1020 G SH-SOLAR 7P-170/1200 G SH TRUCK 5M-180/970 SH TRUCK 5M-83/850 SH TRUCK 7P-175/1260 SH AUTO 5W-100/500 DSS SH AUTO 5W-100/500 E
107340903
107370953
107370966
107370971
107370975
107370979
107370983
107370987
107370991
107370995
107370999
107371003
107371007
107371011
107371015
107371019
107371023
107371027
107371031
107371035
107371039
107371043
107371047
107371051
107371055
107371059
107371063
107371067
107371071
107371075
107371079
107371083
107371087
107371091
107371095
107371099
107371103
107371107
107371111
107371115
107371119
107371123
107371127
107371131
107371135
107371139
107371143
107371147
107371151
107371155
107371159
107371163
107371167
107371171
107371175
107371179
107371183
107371187
107371191
107371195
107371199
107371203
107371207
107371211
107371215
107371219
107371223
107371227
107371231
107371235
107371239
107371243
107371247
107371251
107371255
107371259
107371263
107371267
107371271
107371275
107371279
107371283
107371287
107371291
107371295
107371299
107371303
107371307
107371311
107371315
107371319
107371323
107371327
107371331
107371335
107371339
107371343
107371347
107371351
107371355
107371359
107371363
107371367
107371371
107371375
107371379
107371383
107371387
107371391
107371395
107371399
107371403
107371407
107371411
107371415
107371419
107371423
107371427
107371431
107371435
107371439
107371443
107371447
107371451
107371455
107371459
107371463
107371467
107371471
107371475
107371479
107371483
107371487
107371491
107371495
107371499
107371503
107371507
107371511
107371515
107371519
107371523
107371527
107371531
107371535
107371539
107371543
107371547
107371551
107371555
107371559
107371563
107371567
107371571
107371575
107371579
107371583
107371587
107371591
107371595
107371599
107371603
107371607
107371611
107371615
107371619
107371623
107371627
107371631
107371635
107371639
107371643
107371647
107371651
107371655
107371659
107371663
107371667
107371671
107371675
107371679
107371683
107371687
107371691
107371695
107371699
107371703
107371707
107371711
107371715
107371719
107371723
107371727
107371731
107371735
107371739
107371743
107371747
107371751
107371755
107371759
107371763
107371767
107371771
107371775
107371779
107371783
107371787
107371791
107371795
107371799
107371803
107371807
107371811
107371815
107371819
107371823
107371827
107371831
107371835
107371839
107371843
107371847
107371851
107371855
107371859
107371863
107371867
107371871
107371875
107371879
107371883
107371887
107371891
107371895
107371899
107371903
107371907
107371911
107371915
107371919
107371923
107371927
107371931
107371935
107371939
107371943
107371947
107371951
107371955
107371959
107371963
107371967
107371971
107371975
107371979
107371983
107371987
107371991
107371995
107371999
107372003
107372007
107372011
107372015
107372019
107372023
107372027
107372031
107372035
107372039
107372043
107372047
107372051
107372055
107372059
107372063
107372067
107372071
107372075
107372079
107372083
107372087
107372091
107372095
107372099
107372103
107372107
107372111
107372115
107372119
107372123
107372127
107372131
107372135
107372139
107372143
107372147
107372151
107372155
107372159
107372163
107372167
107372171
107372175
107372179
107372183
107372187
107372191
107372195
107372199
107372203
107372207
107372211
107372215
107372219
107372223
107372227
107372231
107372235
107372239
107372243
107372247
107372251
107372255
107372259
107372263
107372267
107372271
107372275
107372279
107372283
107372287
107372291
107372295
107372299
107372303
107372307
107372311
107372315
107372319
107372323
107372327
107372331
107372335
107372339
107372343
107372347
107372351
107372355
107372359
107372363
107372367
107372371
107372375
107372379
107372383
107372387
107372391
107372395
107372399
107372403
107372407
107372411
107372415
107372419
107372423
107372427
107372431
107372435
107372439
107372443
107372447
107372451
107372455
107372459
107372463
107372467
107372471
107372475
107372479
107372483
107372487
107372491
107372495
107372499
107372503
107372507
107372511
107372515
107372519
107372523
107372527
107372531
107372535
107372539
107372543
107372547
107372551
107372555
107372559
107372563
107372567
107372571
107372575
107372579
107372583
107372587
107372591
107372595
107372599
107372603
107372607
107372611
107372615
107372619
107372623
107372627
107372631
107372635
107372639
107372643
107372647
107372651
107372655
107372659
107372663
107372667
107372671
107372675
107372679
107372683
107372687
107372691
107372695
107372699
107372703
107372707
107372711
107372715
107372719
107372723
107372727
107372731
107372735
107372739
107372743
107372747
107372751
107372755
107372759
107372763
107372767
107372771
107372775
107372779
107372783
107372787
107372791
107372795
107372799
107372803
107372807
107372811
107372815
107372819
107372823
107372827
107372831
107372835
107372839
107372843
107372847
107372851
107372855
107372859
107372863
107372867
107372871
107372875
107372879
107372883
107372887
107372891
107372895
107372899
107372903
107372907
107372911
107372915
107372919
107372923
107372927
107372931
107372935
107372939
107372943
107372947
107372951
107372955
107372959
107372963
107372967
107372971
107372975
107372979
107372983
107372987
107372991
107372995
107372999
107373003
107373007
107373011
107373015
107373019
107373023
107373027
107373031
107373035
107373039
107373043
107373047
107373051
107373055
107373059
107373063
107373067
107373071
107373075
107373079
107373083
107373087
107373091
107373095
107373099
107373103
107373107
107373111
107373115
107373119
107373123
107373127
107373131
107373135
107373139
107373143
107373147
107373151
107373155
107373159
107373163
107373167
107373171
107373175
107373179
107373183
107373187
107373191
107373195
107373199
107373203
107373207
107373211
107373215
107373219
107373223
107373227
107373231
107373235
107373239
107373243
107373247
107373251
107373255
107373259
107373263
107373267
107373271
107373275
107373279
107373283
107373287
107373291
107373295
107373299
107373303
107373307
107373311
107373315
107373319
107373323
107373327
107373331
107373335
107373339
107373343
107373347
107373351
107373355
107373359
107373363
107373367
107373371
107373375
107373379
107373383
107373387
107373391
107373395
107373399
107373403
107373407
107373411
107373415
107373419
107373423
107373427
107373431
107373435

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers



**Stationary Equipment**

ACCESSORY COIN COUNTER

ACCESSORY COLD/HOT INLET MIX.

MC 2C-120/520 UK	MC 2C-140/610 UK	MC 3C-140/570 UK	MC 3C-150/570 XT UK	MC 4C-100/570 UK	MC AM-100/620 UK	MC AM-140/620 XT UK	MC SM-100/770	MC SM-100/770 XT	MC SM-180/840	MC SM-180/840 XT	MC SM-200/1000	MC SM-200/1000 XT	MC SM-200/1050 400V	MC SM-200/1050 220 - 440V	MC SM-200/1050 FA	MC SM-200/1050 XT	MC SM-220/1130 400V	MC SM-220/1130 220 - 440V	MC SM-220/1130 FA	MC SM-220/1130 XT	MC SP-170/1600 FA	MC SP-170/1600 FA XT	MC SP-180/1300 FA	MC SP-180/1300 FA XT	MC SP-250/1100 FA	MC SP-250/1100 FA XT	MC TP-195/1280 FA/400V	MC TP-195/1280 FA/230V	MC TP-195/1280 FA XT	MC TP-195/1280 BBFA	MC TP-195/1280 FA	MC 8P-160/2500	MC 8P-160/2500 ST	MC 8P-180/2100	MH J-C-90/670 PAX	MH AM-100/600 PA UK	MH AM-100/680 PA UK	MH AM-100/680 PAX UK
------------------	------------------	------------------	---------------------	------------------	------------------	---------------------	---------------	------------------	---------------	------------------	----------------	-------------------	---------------------	---------------------------	-------------------	-------------------	---------------------	---------------------------	-------------------	-------------------	-------------------	----------------------	-------------------	----------------------	-------------------	----------------------	------------------------	------------------------	----------------------	---------------------	-------------------	----------------	-------------------	----------------	-------------------	---------------------	---------------------	----------------------

**Tank**

ANTI SCALE TANK CPL.

**Other**

BRACKET F. DETERGENT TANK 2.5L



CHIMNEY ADAPTOR KIT



CRANE LIFTING EYE




CRANE ROUNDSLING 1000KG 50CM



EXHAUST PIPE 148X197



FRONT WHEEL KIT



MANOMETER MC 4



WATER REGULATION CPL. MC 4M



WATER SUCTION KIT 300 L/MIN 06



CHIMNEY ADAPTOR B2/B2.5 ACCESSORY



HOUR COUNTER 50HZ (MECHANICAL) ACCESSORY



LIFTING DEVICE FOR MH 3/4 ACCESSORY



Accessory Kit

WHEEL KIT NEP 5-54PE 7-61PE SMALL FRAME

**Option**

ACCESSORY WATER BREAK TANK 40 L/MIN

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers

- Standard equipment
- Supplementary accessories
- Mountable equipment


**Option**

ACCESSORY WATER INLET SECURITY

MIC 2C-120/520 UK	MIC 2C-140/610 UK	MIC 3C-140/570 UK	MIC 3C-150/570 XT UK	MIC 4C-100/770 UK	MIC AM-140/620 UK	MIC AM-140/620 XT UK	MIC SM-180/840 XT	MIC SM-200/1000 XT	MIC SM-200/1000 XT	MIC SM-200/1050 400V	MIC SM-200/1050 220 - 440V	MIC SM-200/1050 FA	MIC SM-200/1050 XT	MIC SM-220/1130 400V	MIC SM-220/1130 220 - 440V	MIC SM-220/1130 FA	MIC SM-220/1130 XT	MIC GP-170/1600 FA	MIC GP-170/1600 FA XT	MIC GP-180/1300 FA	MIC GP-180/1300 FA XT	MIC GP-250/1100 FA	MIC GP-250/1100 FA XT	MIC TP-195/1280 FA 400V	MIC TP-195/1280 FA 230V	MIC TP-195/1280 FA XT	MIC TP-195/1280 BBFA	MIC TP-195/1280 FA	MIC 8P-160/2500	MIC 8P-160/2500 ST	MIC 8P-180/2100	MH-JC-90/670 PAX	MH-AM-100/600 PA UK	MH-AM-100/680 PA UK	MH-AM-100/680 PAX UK
-------------------	-------------------	-------------------	----------------------	-------------------	-------------------	----------------------	-------------------	--------------------	--------------------	----------------------	----------------------------	--------------------	--------------------	----------------------	----------------------------	--------------------	--------------------	--------------------	-----------------------	--------------------	-----------------------	--------------------	-----------------------	-------------------------	-------------------------	-----------------------	----------------------	--------------------	-----------------	--------------------	-----------------	------------------	---------------------	---------------------	----------------------

ACCESSORY LOW WATER SECURITY

ACCESSORY PRESSURE RELIEF

ACCESSORY 2 X HP DETERGENT

ACCESSORY REMOTE CONTROL 6 FUNCTIONS

ACCESSORY STORAGE KIT

ACC. COIN BOX ON/OFF + DETERGENT A, B

ACCESS. WATER BREAK TANK 40 L/MIN DUO 7P

ACCESSORY JUNCTIONBOX REMOTE/SLAVE

**Delta Booster Lance**

SINGLE LANCE W/1511 BROWN L 160BAR



SINGLE LANCE W/1513 RED L 160BAR



SINGLE LANCE W/1520 GREEN L 160BAR



SINGLE LANCE W/15075 ORANGE L 160BAR



SINGLE LANCE BLACK .1530 27 BAR-2100L/H



SINGLE LANCE BLUE .1508 80BAR-1020L/H



SINGLE LANCE W/1506 SILVER 160BAR



SINGLE LANCE WHITE .1515 27BAR- 1020L/H



SINGLE LANCE YELLOW.1511 107BAR-1560L/H

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Accessories for Industrial Pressure Washers

- Standard equipment
- Supplementary accessories
- Mountable equipment

# Increased flexibility with Nilfisk accessories & options

The SC UNO, SC DUO and SH SOLAR can be equipped with an electronic control board. This gives the possibility to use a wide range of factory-mounted options and equipment such as remote control, coin boxes, pressure relief... The use of options means that a standard machine is quickly and easily configured to become a customer-specific solution.

Item no.:	Accessory or Factory Mounted Option	Description	SC UNO 4M PS	SC UNO 5M L	SC UNO 5M, 6P, 7P	SC DUO 6P, 7P
107371020	Accessory	Water Break Tank (WBT) max 40 l/min	X	X	X	X (SC DUO 6P requires 2 WBT)
107371023	Accessory	Water Inlet Security			X	X
107371024	Accessory	Low Water Security Pressure switch on water inlet of stationary units. Set to 1 bar. If inlet water pressure is lower than 1 bar - the motor pump stops avoiding the unit running in "dry" mode. Needs a service technician to activate the accessory.			X	X
107371025	Accessory	2 x High pressure Detergent (Also needs Remote Control 107371026) Injection of 2 x detergent at high pressure. Volume can be adjusted on the detergent pumps. (0-13 l/hour). Needs a service technician to activate the accessory.			X Requires remote control and WBT	X Requires remote control and WBT
107371026	Accessory	Remote Control 6 functions Needs a service technician to activate the accessory.			X	X
107371027	Accessory	Coin Box ON-OFF + Detergent A-B (EUR, CHF, GBP) Cointer can be taught all coins) Needs a service technician to activate the accessory.			X	X
107371028	Accessory	Pressure Relief If the system is not in use for a period of time (can be adjusted) the machine will close down and relieve the pressure in the high pressure line. Needs a service technician to activate the accessory.			X (Requires WBT)	X (Requires WBT)
107371029	Accessory	Accessory Storage and high pressure hose Can storage 3 lances, one foam sprayer and high pressure hose.	X	X	X	X
107371013	Accessory	Junctionbox Remote/slave. Connection box for remote control extension cable. Needs a service technician to activate the accessory.			X	X
107371000	Factory Mounted Option	Water Break Tank (WBT) max 40 l/min	X	X	X	X (SC DUO 6P requires 2 WBT)
107371014	Factory Mounted Option	Water Inlet Security Opens and closes a solenoid valve on the water inlet line, at the same time as the machine starts and stops. Needs a service technician to activate the accessory.			X	X
107371003	Factory Mounted Option	Stainless Steel cabinet parts UNO		X	X	
107371004	Factory Mounted Option	Stainless Steel cabinet parts DUO				X
107371005	Factory Mounted Option	Low Water Security Pressure switch on water inlet of stationary units. Set to 1 bar. If inlet water lower than 1 bar - the motor pump stops avoiding the unit running in "dry" mode.			X	X
107371006	Factory Mounted Option	2 x High Pressure Detergent (Also needs Remote Control 107371007) Injection of 2 x detergent at high pressure. Volume can be adjusted on the detergent pumps. (0-13 l/hour).			X Requires remote control and WBT	X Requires remote control and WBT
107371007	Factory Mounted Option	Remote Control 6 functions			X	X
107371008	Factory Mounted Option	Coin Box ON-OFF + Detergent A-B (Cointer is for EUR, CHF, GBP coins) Cointer can be taught coins from all other kind of currencies.			X	X
107371009	Factory Mounted Option	Pressure Relief If the system is not in use for a period of time (can be adjusted) the machine will close down and pressure relieve the high pressure line.			X (Requires WBT)	X (Requires WBT)
107371010	Factory Mounted Option	230/3/50 Conversion Kit 5M-L		X		
107371011	Factory Mounted Option	230/3/50 Conversion Kit 5M			X	
107371012	Factory Mounted Option	230/3/50 Conversion Kit 6P - 7P			X	

<b>Option</b>	<b>Description</b>	<b>SH SOLAR D/G</b>	<b>SH SOLAR E</b>
		<b>Item No.</b>	<b>Item No.</b>
High Pressure detergent manual use	Injection of detergent under high pressure, manually controlled at the machine.	107340903	na
Cold/Warm switchover EH	Allows double water inlet (either hot or cold) and switchover between sources.	na	107370959
1 x detergent, EL. SOLAR OPTION	Injection of 1 x detergent under high pressure controlled by solenoid valve and dosing unit. Detergent can be activated at a remote control unit or box.	107370952 Also need: Remote control box with 4 buttons	107370952 Also need: Remote control box with 4 buttons
2 x detergent, EL. SOLAR OPTION	Injection of 2 x detergent under high pressure controlled by solenoid valve and dosing unit. Detergent can be activated at a remote control unit or coin box.	107370953 Also need: Remote control box with 5 buttons	107370953 Also need: Remote control box with 5 buttons
Option Automatic Pressure relief	If the system is not in use for 10 minutes (or 20 seconds after the system closes down), a valve opens and relieves the pressure in the high pressure piping line. The entire system is free of pressure and must afterwards be started again.	107370966	107370966
No-Scale Unti SOLAR Option	Prevents scale in the boiler or internal water tank.	107370958	107370958
Low water security - 1 bar	Pressure switch on water inlet of the stationary unit. Set to 1 bar. Inlet water lower than 1 bar - the motor pump stops avoiding the unit running in "dry" mode.	107340905	Standard
Water inlet security option	Opens and closes a solenoid valve on the water inlet line, at the same time as the machine starts and stops.	107340910	na
Remote control boxes	On-Off = 2 buttons On-Off+1 function (burner or option) = 3 buttons On-Off+2 functions (burner or option) = 4 buttons On-Off+3 functions (burner or option) = 5 buttons Mains cut off button	107340911 107340912 107340913 107340914 29277	107340911 107340912 107340913 107340914 29277
Coin boxes €½ Coin boxes €1 Coin boxes Token Coin boxes €½, incl. Detergent Coin boxes €1, incl. Detergent Coin boxes Token, incl. Detergent	Mechanical, simple on-off, €½ Mechanical, simple on-off, €1 Mechanical, simple on-off, Tokens Mechanical, on-off + 1 detergent, €½ Mechanical, on-off + 1 detergent, €1 Mechanical, on-off + 1 detergent, Token	54328 54329 54330 54332 54333 54334	54328 54329 54330 54332 54333 54334
FROST PROTECTION - Standard	Water wasted/no recirculation. Requires a built-in pressure relief. Change gun to "weeping gun".	107370954	107370954
FROST PROTECTION - Deluxe	incl. heating unit	107370955	107370955
M.M.O.	Allows connection of up to 3 SOLAR units together	107370964	107370964
Closed air intake for gas models	Closed air intake for gas models	107370965	107370965
Stainless steel parts G/GH	Stainless steel cabinet	107370963 (G+GH)	
Stainless steel parts D/EH	Stainless steel cabinet	107370962 (D)	107370962 (EH)
2 x chemical magnet valve	Requires control kit	107360901	
Winter gun - 12 bar	For frost protection - water wasted	106402243	106402243



Liquid Sprayers are hand-held low pressure manual sprayers. Specific models can be used with aggressive detergents and acids.

PRODUCTS	1,5P	5S	10SP	20S
Alcohol	○	●	●	●
Chlorine			○	
Alkaline	○	○	○	○
Solvents	●	●	●	●
Mineral Oil	○	●	●	●
Acids automotive			○	
Acides Hygiene			○	

- Very Suitable
- Limited Suitable



## 1.5                  8P                  5S                  10SP                  20S

TECHNICAL DATA	1.5	8P	5S	10SP <sup>1)</sup>	20S
Pump pressure (bar)	2	4	6	6	6
Tank capacity (l)	1.25	8	5	10	20
Working pressure (bar/psi)	2/29	3/43	6/87	6/87	6/87
Max. water temperature (°C)	30	40	50	30	50
Length of hose (m)	-	1.3	1.4	2	4
Seal	Viton	Viton	Viton	Viton	Viton
Compressed air connection	No	No	Yes	Yes	Yes
With hand pump	Yes	Yes	Yes	No	No
Metal nozzle with regulation	Yes	Yes	Yes	Yes	Yes
Diameter (mm)	130	200	180	210	210
Height (mm)	300	620	460	580	890
Weight (kg)	0.4	2.2	3.5	6.2	7.5
<b>ITEM NO.</b>	<b>80853</b>	<b>25598</b>	<b>7110005</b>	<b>7110010</b>	<b>7110020</b>

ACCESSORIES	1.5	8P	5S	10SP <sup>1)</sup>	20S
Pistol valve (excl. hose and lance)			● / 7110420		
Pistol valve (excl. hose and lance)				● / 7110403	● / 7110403
Manual pump, complete			● / 7110241		
Hose			● / 7110428	● / 7110431	● / 7110401
Spray gun, Pro acces			○ / 4810328	○ / 4810328	
Foam nozzle G 1/4			○ / 308000057	○ / 308000057	○ / 308000057

<sup>1)</sup> The 10SP is a stainless steel tank for durability, with a polyethylene internal liner for use with detergents containing chlorine or those with a pH below 3.

The product increases cleaning width and reduces cleaning time compared to standard lances and nozzles in a very cost effective way. The HydroScrub's are robust and efficient surface cleaners for floor, wall or table cleaning tasks.

## Application and customer groups:

The HydroScrub's are perfect tools for cleaning of surfaces in the automotive/transport segment, in food industries and for craftsmen. The different models can be used on machines in the low, middle and high range of High Pressure Washers.



The HydroScrub is an effective tool for cleaning various large flat surfaces, and must be connected to Nilfisk high pressure washers fitted with the original size of nozzle.

## How to choose the correct nozzles

Nilfisk machine Standard nozzle	You need:	Item no: 1 <sup>st</sup> nozzle	Item no: 2 <sup>nd</sup> nozzle	P300	P400	S500	P500 M
.0275	2 x .0165	102802851	102802851	.			
.0300	2 x .0165	102802851	102802851	.			
.0340	1 x .0200 + 1 x .0165	102802852	102802851	.	.		
.0350	1 x .0200 + 1 x .0165	102802852	102802851	.	.		
.0370	1 x .0200 + 1 x .0165	102802852	102802851	.	.		
.0400	2 x .0200	102802852	102802852		.		
.0400	1 x .0165 + 1 x .0285	102802851	102802854	.			
.0435	1 x .0200 + 1 x .0245	102802852	102802853	.	.		
.0450	1 x .0200 + 1 x .0245	102802852	102802853	.	.		
.0475	1 x .0200 + 1 x .0275	102802852	101117692		.		
.0475	1 x .0200 + 1 x .0285	102802852	102802854	.			.
.0500	2 x .0275	101117692	101117692		.		.
.0500	1 x .0245 + 1 x .0285	102802853	102802854	.			
.0530	2 x .0275	101117692	101117692		.		.
.0530	1 x .0245 + 1 x .0285	102802853	102802854	.			
.0550	2 x .0275	101117692	101117692		.		.
.0550	2 x .0285	102802854	102802854	.			
.0600	2 x .0300	101117695	101117695		.	.	.
.0640	1 x .0300 + 1 x .0340	101117695	101119735	.	.	.	.
.0650	1 x .0300 + 1 x .0340	101117695	101119735	.	.	.	.
.0680	2 x .0340	101119735	101119735	.	.	.	.
.0700	2 x .0350	101119736	101119736	.	.	.	.
.0750	1 x .0350 + 1 x .0400	101119736	101119738	.	.	.	.
.0800	2 x .0400	101119738	101119738	.	.	.	.
.0850	2 x .0435	101119739	101119739	.	.	.	.
.0900	2 x .0450	101119740	101119740	.	.	.	.
.0950	2 x .0500	101119741	101119741	.	.	.	.
.1000	2 x .0500	101119741	101119741	.	.	.	.
.1100	2 x .0550	101119743	101119743		.		.
.1200	2 x .0600	101119744	101119744		.		.
.1300	2 x .0650	101119746	101119746		.		.
.1500	2 x .0750	101119749	101119749		.		.
.1590	2 x .0800	101119750	101119750		.		.

TECHNICAL DATA	P300	P400	S500	P500 M
Diameter, cabinet (mm)	300	400	500	500
Side bar mountable on cabinet	Yes	No	No	No
Cabinet material	Injection moulded ABS	Injection moulded ABS	Stainless steel	Injection moulded ABS
Bearing for rotating arm:	Long life bearing	Long life bearing	Long life bearing	Long life bearing
Min/max. water flow (l/h)	420 / 750	600 / 1200	1000 / 2000	750 / 1400
Max pressure (bar)	200	250	250	250
Max temperature inlet water °C	60	60	60	60
Nozzles included	Yes	No	No	No
Machine use on - nozzle size	.0275 - .0550	.0340 - .1000	.0600 - .1590	.0475 - .1590
ITEM NO.	106403187	106403157	106403158	106403159



## Powerful and cost efficient cleaning for professional users

- High pressure 350-500 bar
- Solid, galvanised and powder-coated frame
- Stainless steel top cover for protection and hose storage
- Big handle for easy manoeuvring and storage of cables and hoses
- Compact design - can go through a standard size door
- Easy access to pump for service and maintenance
- Inlet filtration system

Heavy-duty high pressure water blasters offer powerful and cost efficient cleaning for professional users. Removing paint, rust, markings and graffiti on steel and concrete surfaces.

- Cleaning scaffolding material
- Cleaning construction machinery and equipment
- Removing limescale deposits and marine growth
- Deck cleaning and cleaning of cargo hold



### TECHNICAL DATA

	MERLION 350	MERLION 500
Pump pressure (bar/MPa)	350/35	500/50
Cleaning impact (kg/force)	9.5	7.7
Water flow (l/h)	1260	960
Pump (RPM)	1450/1750	1450/1750
Max. water temperature (°C)	30	30
Power consumption (kW)	15	15
Voltage/phase/frequency/current (V~/Hz/A)	380-415/3/50/29 or 440-460/3/60/29	380-415/3/50/30 or 440-460/3/60/30
Dimensions L x W x H (mm)	1057x494x938	1057x494x938
Weight (kg)	235	240
El-cable, oil resistant (M)	15	15
Nozzle size, straight fan 1/4"	0005/0005	0003/0003
FEATURES		
20 Hp motor	●	●
Automatic start/stop with timer	○	○
Triplex pump with ceramic plunges	●	●
STANDARD EQUIPMENT		
HP hose	15 m (½")	15 m (½")
Lance	single	single
Gun	dry shut P.A. - model 551180	dry shut P.A. - model 551180



## Be sure you have the right tool for the job

- High pressure 500-800 bar
- Solid, galvanised and powder-coated frame
- Non-corrosive material used in pumps and fittings
- Unique pump design with 3 ceramic plungers
- Built-in stainless unloader/safety valve
- Start-up accumulator
- Easy access to pump for service and maintenance
- Low water level cut-off switch
- Built-in trigger gun holder and cable holder
- Drip return ensuring long seal life and drip free operation (MERMAID 800)
- Identical suction and discharge valves, easily replaceable (MERMAID 800)

Perfect for deck cleaning and cleaning cargo holds. Furthermore, they offer dust free sandblasting. These machines are designed not only to clean surfaces, but also to blast off scale, grime, rust, graffiti and even cut through concrete.



TECHNICAL DATA	MERMAID 500	MERMAID 800
Pump pressure (bar/MPa)	500/50	800/80
Cleaning impact (kg/force)	16.3	13.7
Water flow (l/h)	1800	1200
Pump (RPM)	1450/1750	1450/1750
Max. water temperature (°C)	30	30
Power consumption (kW)	30	30
Voltage/phase/frequency/current (V~/Hz/A)	380-415/3/50/46 or 440-460/3/60/46	380-415/3/50/50 or 440-460/3/60/50
Dimensions L x W x H (mm)	1495x980x1263	1495x980x1263
Weight (kg)	440	530
El-cable, oil resistant (M)	15	15
Nozzle size, straight fan 1/4"	0005/0005	0003/0003
FEATURES		
40 Hp motor	●	●
80 l water brake tank	●	●
Pneumatic wheels	●	●
Stainless steel pump head		●
Built-in safety valve	●	●
5 x Ceramic plunges	●	●
3 x Tungsten carbide plunges		●
Built-in booster pump		●
25 micron filtration system		●
Duplex-steel valves, with stainless steel casing		●
STANDARD EQUIPMENT		
HP hose	20 m (1/2")	20 m (1/2")
Lance	single	single
Gun	dry shut P.A. - model 551180	dry shut P.A. - dump gun w/ by-pass



# Features – designed to meet our customer needs!

Nilfisk offers you a complete range of innovative and powerful wet & dry vacuum cleaners - all designed to accommodate not only your most demanding professional cleaning needs, but also to match your specific level of requirements in terms of suction power, with features such as advanced filtration, very low noise, high performance and automatic or semi-automatic filter cleaning.

---

## XtremeClean™

This advanced technology delivers automatic filter cleaning while you work at full vacuum performance. Using either valve or servo based solutions, XtremeClean™ ensures an even longer lifetime, high efficiency and prevents power loss through restricted airflow – without interruptions.

---

## InfiniClean™

InfiniClean™ automatically cleans the filter during operation using a reversed air pulse that is activated every 15 seconds – increasing the airflow up to 20%. The durable and washable PTFE long-life filter with non-stick membrane can be used for both wet and dry pick-up.

---

## Push&Clean™

This technology allows fast and simple cleaning of the filter cartridge. When pushing the filter cleaning button, the surrounding air enters the filter cartridge in the opposite direction. Dirt is blasted off the filter and the suction performance is high again. A comfortable, powerful yet gentle way of cleaning the filter.

---

## MultiFit™

MultiFit was conceived so that all suction hoses, regardless of whether the diameter is 27, 32, 36, 38 or 50 mm, can be connected to the vacuum without further expenditure. On most models, the MultiFit hose inlet gives the flexibility to choose between universal or AntiStatic hoses.

---

## **SoftStart™**

A voltage dropout can lead to system break downs if the appliance is sensitive to voltage fluctuation. SoftStart keeps the starting current low and reduces voltage dropout. The function is certified by an independent testing institution.

---

## **AntiStatic**

The friction of dust particles can cause a build-up of static electricity in the hose which can cause electrical shocks or even ignite explosive material or combustible dust. The Nilfisk AntiStatic system means that the vacuum inlet fittings are earthed and electrostatic charges are prevented.

---

## **AutoOnOff™**

By connecting the tool directly to the machine, dust is vacuumed directly from source and the vacuum is switched automatically on and off with the tool. Follow up controls are included for the complete emptying of the suction hose and continuous power regulation.

---

## **SystemEC™**

The SystemEC, used in all Nilfisk ATEX ZONE 22 vacuums, is a single-phase drive system developed with an electronically commutated direct current motor. The motor is electronically controlled, making carbon brushes unnecessary.

---

## **FlowSensor™**

This patented technology, used in all Nilfisk H and M class and TYPE 22 vacuum cleaners electronically measures air flow directly with the use of two thermal gates. Air flow can be determined in all operating conditions regardless of hose diameter and/or power supply fluctuation.

# Powerful, intelligent and economical - whichever vacuum cleaner you choose

Nilfisk offers a wide range of commercial and industrial vacuum cleaners, providing cleaning professionals with the right solution for every task. Our range of vacuum cleaners covers everything from dry canister vacs to wet & dry vacs.

## Commercial dry vacuum cleaner

The SALTIX 10 is a reliable and compact tub vacuum for everyday use. The powerful motor and high quality nozzle ensures superior efficiency and the durable design makes sure that the machine can be relied upon day in and day out. The high filling capacity of the SALTIX 10 means less time spent changing dust bags and the lightweight design makes it easy to move from place to place. To help with easy maintenance and to maximise safety, an orange detachable power cord is included as standard.

B



## Commercial wet & dry vacuum cleaners

The MAXXI II platform includes durable machines with 35 to 75 litre containers that can take on any application, big or small. With outstanding performance and features like easy emptying and corrosion resistance, our range of wet & dry vacs perform well on dry, wet or damp dirt. The dual filter system allows the machine to be used on both wet and dry applications without the need to change filters. It combines productivity, high quality and ease of use into a workhorse of a wet & dry vacuum cleaner.



## Compact single-phase wet & dry vacuum cleaners

The AERO 21/26 series feature the Push&Clean™ semi-automatic filter cleaning system, ergonomic design and convenient accessory storage. Being compact, lightweight and robust, these vacuums can easily be transported to any location making them ideal for workers within industry, automotive and building & construction. These are available in a 20 or 25 litre container capacity.

# ATTIX range – top performance with less hassle

The ATTIX range is designed for demanding clean-up applications and always with the user in mind. Always ensuring productivity and efficiency wherever heavy cleaning is necessary, or where potentially hazardous dust needs to be safely collected.

## Industrial single-phase wet & dry vacuum cleaners



The ATTIX 30, 40 & 50 represents a possibility of achieving superior suction power and innovative features. Silent and mobile, wet or dry - when high performance and robustness is required. Available with Push&Clean™ semi-automatic filter cleaning system.



The ATTIX 33 & 44 represents superior dust extraction for professional and safe cleaning. They are robust and easy to handle – also when it comes to transportation from one site to another. All models offer flexible storage solutions for tools and accessories, so everything you need is at hand.



The ATTIX 7 is perfect for users who need big capacity and features that focus on efficiency. Our most silent vacuum with superior suction performance, stainless steel tilt or lift-out container, XtremeClean™ automatic filter cleaning, antistatic capability and more.



The ATTIX 9 is designed with dual motors to withstand the toughest applications. With the ATTIX 9 range, the high end of the industrial vac line of Nilfisk is complete! A versatile, high performance unit for demanding everyday vacuuming.

## Industrial single-phase and three-phase wet & dry vacuum cleaners

The ATTIX 115 and 125 industrial vacuum cleaners are ideal for liquids and solid materials with a performance to perfectly satisfy any cleaning and maintenance situation. The robust steel construction, powerful turbine and the big container on wheels grant a high reliability and mobility capable of working for hours.



## Self-service vacuum cleaners

Modern, attractive and flexible. Developed primarily for use in petrol stations, the SB series is built for the rigors of outdoor use in all kinds of weather.

Coin-operated self-service vacuums with special requirements. Single motor or dual motor machines are available. All models use a simple cloth filter system for easy maintenance. Done to perfection, down to the smallest detail.



# The ATTIX Safety range – a solution for every need

Hazardous dust demands the highest level of safety to ensure maximum health protection. Nilfisk health and safety vacuum cleaners span all dust classes – **L** (low), **M** (medium), **H** (high), **Asbestos** and explosive dusts classified as **ATEX Type 22**.



## L class safety vacuums

Dusts from dust class L may be picked up using these vacuum cleaners. These include dusts with OEL values  $> 1 \text{ mg/m}^3$ . This is the standard for simple, harmless dust such as house dust and materials such as soil.



## M class safety vacuums

Dusts from dust classes L and M may be picked up using these vacuum cleaners. These include all health-endangering, non-carcinogenic dusts with OEL-values  $> 0.1 \text{ mg/m}^3$  and wood dusts.

Application: Industry sectors as chemicals, wood, plastics, metal, pharmaceuticals, paper and textiles; for craftsmen including carpenters, joiners and painters. If you are working with M class hazardous dust, you will find the perfect wet & dry solution here.



## H class safety vacuums

Dusts from dust classes L, M and H including Asbestos may be picked up using these vacuum cleaners. These include all health-endangering dusts with OEL-values, all carcinogenic dusts and dusts contaminated with germs and bacteria.

Application: Industry and trade sectors as chemicals, plastics, pharmaceuticals, mining, paper and textiles; for craftsmen such as roofers and painters. If you are working with H class hazardous dust, you will find the perfect wet & dry solution here.




## ATEX zone 22 safety vacuums

Dusts from dust classes L and M as well as explosive dusts may be picked up using these vacuum cleaners. These include all non-carcinogenic dusts with OEL values  $> 0.1 \text{ mg/m}^3$  and/or flammable dusts in ATEX zone 22 applications.

Application: Industry and trade sectors as chemicals, wood, plastics, metal, pharmaceuticals, paper and textiles; for craftsmen such as carpenters, bakers and floor layers.

If you are working in an ATEX zone 22 explosive dust environment, you will find the perfect wet & dry solution here. Choose from many different container sizes and performance levels, all with features that will enhance your working efficiency and minimise your operating costs.

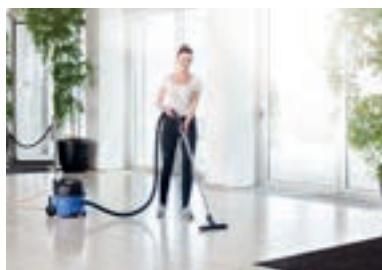

## Reliable and compact tub vacuum for everyday use

- Low sound pressure level of just 62 dB(A) makes this vacuum suitable for daytime cleaning
- Weighs just 5.5 kg making it easy to move from place to place
- Large 10 litre container with 8 litre dust bag net filling
- Detachable orange cord
- Entire machine, including hose and wand, can be carried safely and comfortably in one hand
- Certified HEPA filter as standard
- Lightweight aluminium tube

The powerful motor and high quality nozzle ensures superior efficiency and the durable design makes sure that the machine can be relied upon day in and day out. The very high filling capacity of the SALTIX 10 means less time spent changing dust bags and the lightweight design makes it easy to move from place to place.



TECHNICAL DATA	SALTIX 10 UK
Airflow rate (l/min.)	32
Vacuum (mbar/kPa)	800
Power Piec (W)	
Sound pressure level (dB(A) BS 5415)	62
Dust bag capacity (l)	8
Volt/frequency (V/Hz)	220/50-60
Weight (kg)	5.5
Cable length (M)/ plug type	10
Hose length (m)	1.9
Length x width x height (mm)	395x340x390
Energy efficiency class	B
Dust pick up on carpet	C
Dust pick up on hard floor	C
Dust re-emission class	A
Sound power level dB(A) IEC/EN 60335-2-69	73
Annual energy consumption (kWh/year)	32
FEATURES	
Detachable cord	•
Dust bag (1 pcs)	•
Cable storage	
STANDARD EQUIPMENT	
HEPA FILTER	147 1250 600
SACK FILTER	147 1432 500
DETACH CORD SET 10M ORANGE UK	107402677
HOSE CPL D32	147 0765 500
EXTENSION TUBE ALUMINIUM	011 6431 500
BRUSH NOZZLE D32	140 8244 500
CREVICE NOZZLE D32 L153 BLACK	
COMBI NOZZLE RD277 KIT	
COMBI NOZZLE RD295P W.CLIP	107417790
HEPA FILTER H13	147 1250 500
ITEM NO.	<b>107415317</b>



## Commercial wet and dry dual filter vacuum cleaners

- Dual filter system to handle both wet and dry applications without the need to change filters
- Easy emptying (with motor head fitted)
- Stainless steel tubes
- Intuitive single handed locking mechanisms
- Wet mesh sack filter protecting the motor from foam ingress
- Flexible and handy mounting of tools and accessories
- Fixed steel push handle
- Tipping mechanism for easy emptying
- Transparent drain hose for indication of water level in the container
- The containers can be easily lifted off the trolley for cleaning or maintenance

The Nilfisk MAXXI II series of wet and dry vacuum cleaners contains three models 35, 55 and 75 litre containers. The dual filtration system allows the machine to be used in both wet and dry applications without the need to change filters. Thanks to MultiFit connection the MAXXI II tools are compatible with all ATTIX accessories.



TECHNICAL DATA	MAXXI II 75-2 WD 220-240V 50-60Hz UK	MAXXI II 55-2 WD 220-240V 50-60Hz UK	MAXXI II 35 WD 220-240V 50-60Hz UK
Airflow rate (l/min.)	4320	4320	2880
Vacuum (mbar/kPa)	210/21	210/21	200/20
Power Piec (W)	2400	2400	1250
Sound pressure level (dB(A) BS 5415)	66	66	62
Tank capacity (l)	75	55	35
Dust bag capacity (l)	44	28	18
Volt/frequency (V/Hz)	220-240/50-60	220-240/50	220-240/50
Weight (kg)	28	25.5	12.5
Cable length (M)/ plug type	10/UK	10/UK	10/UK
Hose length (m)	2.5	2.5	1.9
Length x width x height (mm)	840x620x1000	840x620x1000	460x420x740
FEATURES			
Tube holder	•	•	•
Dual filter system	•	•	•
Cable storage	•	•	
Accessory holders	•	•	•
Drain hose	•	•	
Dual motor	•	•	
STANDARD EQUIPMENT			
BRUSH STRIPS FOR 60356			60358
CARTRIDGE FILTER	107407300	107407300	107407297
WET FILTER	107407302	107407302	107407299
HOSE D40 2.5M CPL	107407336	107407336	
HOSE D32 1.9M CPL			107407308
EXTENSION TUBE D40 - SS	107407337	107407337	
EXTENSION TUBE D32 - SS			107407309
HARDFLOOR NOZZLE 400MM x Ø40MM - KIT	107416577	107416577	
HARDFLOOR NOZZLE 300MM x Ø32MM - KIT			107416575
FLOOR NOZZLE D40 BRUSH	107407339	107407339	
FLOOR NOZZLE D32 BRUSH			107407311
BRUSH NOZZLE D32			107407312
CREVICE NOZZLE D40	107408850	107408850	
CREVICE NOZZLE D32			107407334
ITEM NO.	107405178	107405177	107405175




## Compact wet & dry vacuum cleaners with filter cleaning and simple features

- Washable PET fleece filter with minimum 99,9% filtration efficiency
- MultiFit accessory system for ultimate flexibility
- Convenient accessory and cable storage
- Exhaust air blow function
- Stable wheels and ergonomic design for safe operation

The AERO 21 is the smallest model in the AERO 21/26 series with compact design and easy to use features such as Push&Clean™ filter cleaning system and convenient accessory storage. The 20 litre machine has efficient suction performance, robust trolley and lifting handle.



TECHNICAL DATA	AERO 21-01 PC 110V 50-60Hz GB	AERO 21-01 PC 203V 50-60Hz GB
Airflow rate (l/min.)	3600	3600
Vacuum (mbar/kPa)	210/21	210/21
Power Pmax (W)	1250	1250
Power Piec (W)	1000	1000
Working sound level (dB(A))	64	64
Container volume (l-max)	20	20
Mains connection (V~/Hz/A)	110/1/50-60/16	230/1/50-60/13
Length x width x height (mm)	375x385x505	375x385x505
Weight (kg)	7.5	7.5
El cable (m)	7.5	5
Main filter type	PET	PET
Filter cleaning system	Push&Clean	Push&Clean
FEATURES		
Hose holder	•	•
Fleece filter bag 1 pcs	•	•
STANDARD EQUIPMENT		
SUCTION HOSE D32x1900 CPL.	107405600	107405600
EXTENSION TUBE D36 2X500MM ALU	107400032	107400032
FLOOR NOZZLE D36x300MM W/D KIT	107402706	107402706
UNIVERSAL NOZZLE D36X115	14295	14295
CREVICE NOZZLE D36X200	29541	29541
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490	302000490
<b>ITEM NO.</b>	<b>107406610</b>	<b>107406611</b>

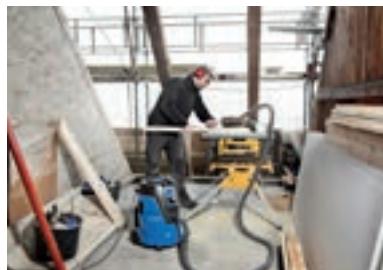

## Compact wet and dry vacuum cleaners with filter cleaning and ergonomic design

- Washable PET fleece filter with minimum 99,9% filtration efficiency
- MultiFit accessory system for ultimate flexibility
- Convenient accessory/cable storage and tool deposit
- Exhaust air blow function
- Flexible rubber strap for hose storage

The AERO 26 is a reliable and compact vacuum developed with a high focus on the variety of applications and end-user needs within industry, automotive and building and construction. It is a lightweight and robust machine with ergonomic design, semi-automatic filter cleaning and convenient storage solutions. A Power socket with AutoOnOff activates the machine when the power tool operates providing efficient dust extraction from the power tool.



TECHNICAL DATA	AERO 26-21 PC 110V 50-60Hz GB	AERO 26-21 PC 230V 50-60Hz GB
Airflow rate (l/min.)	3600	3600
Vacuum (mbar/kPa)	210/21	210/21
Power Pmax (W)	1250	1250
Power Piec (W)	1000	1000
Working sound level (dB(A))	64	64
Container volume (l-max)	25	25
Mains connection (V/~/Hz/A)	110/1/50-60/16	230/1/50-60/15
Length x width x height (mm)	375x390x530	375x390x530
Weight (kg)	9	9
El cable (m)	7.5	5
Main filter type	PET	PET
Filter cleaning system	Push&Clean	Push&Clean
FEATURES		
Automatic On/Off-elec. tools	•	•
Fleece filter bag 1 pcs	•	•
Container lift/tilt handle	•	•
STANDARD EQUIPMENT		
SUCTION HOSE D32X3500 CPL.	107406115	107406115
EXTENSION TUBE D36 2X505MM ST/CR	302000529	302000529
TOOL ADAPTER WITH SUCTION REGULATION D32	107409977	107409977
FLOOR NOZZLE D36x300MM W/D KIT	107402706	107402706
UNIVERSAL NOZZLE D36X115	14295	14295
SUCTION BRUSH D36 BLACK	302002509	302002509
CREVICE NOZZLE D36X200	29541	29541
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490	302000490
ITEM NO.	107406613	107406614





## Silent and mobile wet & dry industrial vacuum cleaners with superior suction power

- Compact, ergonomic and powerful
- Push&Clean™ filter cleaning system takes care of filter cleaning tasks in just a few seconds
- Washable PET fleece filter for high efficiency and low maintenance costs
- SilentPower. High performance that is seen, but not heard
- 30 litre container volume and a fleece filter bag for effective filtration

The compact size and big performance of the ATTIX 30, along with the wide range of available models, make it a perfect choice for people who move with their work from place to place. The ergonomic design and low noise level emphasise our focus on real user benefits and longer working time.



TECHNICAL DATA	ATTIX 30-01 PC 230V 50-60Hz GB	ATTIX 30-01 PC 110V 50Hz GB	ATTIX 30-21 PC 230V 50-60Hz GB	ATTIX 30-21 PC 110V 50Hz GB
Airflow rate (l/min.)	3700	3200	3700	3200
Vacuum (mbar/kPa)	250/25	230/23	250/25	230/23
Power Pmax (W)	1500	1150	1500	1150
Power Piec (W)	1200	1000	1200	1000
Working sound level (dB(A))	59	59	59	59
Container volume (l-max)	30	30	30	30
Mains connection (V/~/Hz/A)	230/1/50-60/13	110/1/50/16	230/1/50-60/13	110/1/50/16
Length x width x height (mm)	450x380x595	450x380x595	450x380x595	450x380x595
Weight (kg)	10	10	10	10
El cable (m)	10	10	10	7,5
Main filter type	PET	PET	PET	PET
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean	Push&Clean
FEATURES				
Softstart			•	•
Anti-static system	•		•	•
Motor speed control			•	•
Automatic On/Off-elec. tools			•	•
Storage of accessories	•	•	•	•
Extra socket for tool			•	•
Fleece filter bag 1 pcs	•	•	•	•
STANDARD EQUIPMENT				
UNI. HOSE Ø36X3000MM W COUPLING EVA	46948	46948		
CURVED HAND TUBE D36MM ST/CR	302000528	302000528		
EXTENSION TUBE D36 2X505MM ST/CR	302000529	302000529		
COMBI NOZZLE Ø36X260MM PP	302000477	302000477		
CREVICE NOZZLE Ø36X300 PP	6084	6084		
HOSE D27X3500 AS WITH TOOL ADAPTER			107406091	107406091
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490	302000490	302000490	302000490
ITEM NO.	302003625	302003626	302003627	107409041



### Industrial wet & dry vacuum cleaner with stainless steel container

- Compact, ergonomic, and powerful
- Push&Clean™ filter cleaning system takes care of filter cleaning tasks in just a few seconds
- SoftStart™ will safeguard you from blown fuses
- High quality stainless steel container
- Low working sound level
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- Accessory storage and tool deposit

The ATTIX 40 gives superior suction power in a compact and flexible solution. Silent, small and mobile, but with the same convincing suction performance as the larger ATTIX 50, this is the perfect solution for commercial and industrial use with an easy to clean corrosion proof stainless steel container.



#### TECHNICAL DATA

#### ATTIX 40-01 PC INOX 230V 50-60Hz EU

Airflow rate (l/min.)	3700
Vacuum (mbar/kPa)	250/25
Power Pmax (W)	1500
Power Piec (W)	1200
Working sound level (dB(A))	59
Container volume (l-max)	37
Mains connection (V~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	450x440x735
Weight (kg)	13
El cable (m)	7.5
Main filter type	PET
Filter cleaning system	Push&Clean

#### FEATURES

Softstart	•
Anti-static system	•
Storage of accessories	•
Fleece filter bag 1 pcs	•

#### STANDARD EQUIPMENT

UNI. HOSE Ø36X3000MM W COUPLING EVA	46948
CURVED HAND TUBE Ø36MM SS	46691
EXTENSION TUBE Ø36 2X505MM SS	107408074
FLOOR NOZZLE D36X400MM W/D	302003666
CREVICE NOZZLE Ø36X300 PP	6084
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490
<b>ITEM NO.</b>	<b>107413593</b>



## Wet & dry vacuum cleaners with superior suction power for high-frequency cleaning

- Compact, ergonomic, and powerful
- Push&Clean™ filter cleaning system takes care of filter cleaning tasks in just a few seconds
- Washable PET fleece filter for high efficiency and low maintenance costs
- SilentPower. High performance that is seen, but not heard
- Large container volume
- SoftStart™ will safeguard you for blown fuses
- Cleanroom version available for Class 5-9, ISO 14644\_1
- AntiStatic System

The ATTIX 50 combines high performance with a big container capacity - the ideal solution for customers with high frequency and demanding cleaning needs. The ergonomic design ensures functional and user-friendly operation.



TECHNICAL DATA	ATTIX 50-01 PC 230V 50-60Hz GB	ATTIX 50-01 PC 230V 50-60Hz VLT GB	ATTIX 50-01 PC 110V 50Hz GB	ATTIX 50-21 PC 230V 50-60Hz CLEAN ROOM EU
Airflow rate (l/min.)	3700	3700	3200	3200
Vacuum (mbar/kPa)	250/25	250/25	230/23	230/23
Power Pmax (W)	1500	1500	1150	1400
Power Piec (W)	1200	1200	1100	1100
Working sound level (dB(A))	59	59	59	60
Container volume (l-max)	47	47	47	47
Mains connection (V/~/Hz/A)	230/1/50-60/13	230/1/50-60/13	110/1/50/16	230/1/50-60/16
Length x width x height (mm)	450x380x750	450x380x750	450x380x750	450x380x750
Weight (kg)	11	11	11	11
El cable (m)	10	10	10	7.5
Main filter type	PET	PET	PET	HEPA
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean	Push&Clean
FEATURES				
Softstart	•	•	•	•
Anti-static system	•	•	•	•
Motor speed control				•
Automatic On/Off-elec. tools				•
Brushless longlife 1-ph. motor				•
Storage of accessories	•	•	•	•
Fleece filter bag 1 pcs	•	•	•	•
STANDARD EQUIPMENT				
UNI. HOSE Ø36X3000MM W COUPLING EVA	46948		46948	
HOSE Ø36X5000MM AS W COUPLING		302001682		302001682
CURVED HAND TUBE D36MM ST/CR	302000528		302000528	
EXTENSION TUBE D36 2X505MM ST/CR	302000529		302000529	
TOOL ADAPTER D27 QUICKSYSTEM				302000535
FLOOR NOZZLE D36X400MM W/D	302003666		302003666	
CREVICE NOZZLE Ø36X300 PP	6084	6084	6084	
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490	302000490	302000490	
FILTER ELEMENT Ø211X140 H-CLASS				302000658
MOTOR COOLING FILTER KIT				302003721
EXHAUST AIR COLLECTOR				302003717
ITEM NO.	302003630	302003631	302004262	107400412



### Superior and powerful dust extractor

- InfiniClean™ - Automatic filter cleaning system which minimises performance loss
- PTFE long-life filter with non-stick membrane and minimum 99.9% filtration efficiency
- Dust class L certification (selected models)
- Unique dual filter solution available with HEPA filtration
- 30 litre container with steel castors and robust bumper
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and long-life filter bag

The ATTIX 33 series comes with superior suction power, sealed dust system, automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & construction and other industries. A superior solution for professional customers looking for a robust, safe and reliable machine.



TECHNICAL DATA	ATTIX 33-01 IC 110-120V 50/60HZ GB	ATTIX 33-01 IC 220-240V 50/60HZ GB	ATTIX 33-2L IC 110-120V 50/60HZ GB	ATTIX 33-2L IC 220-240V 50/60HZ GB
Airflow rate (l/min.)	4200	4500	4200	4500
Vacuum (mbar/kPa)	230/23	250/25	230/23	250/25
Power Pmax (W)	1200	1400	1200	1400
Power Piec (W)	1000	1200	1000	1200
Working sound level (dB(A))	60	60	60	60
Container volume (l-max)	30	30	30	30
Mains connection (V/~/Hz/A)	110/1/50-60/16	230/1/50-60/13	110/1/50-60/16	230/1/50-60/13
Length x width x height (mm)	565x385x520	565x385x520	565x385x520	565x385x520
Weight (kg)	14.5	14.5	14.5	14.5
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	PTFE	PTFE	PTFE	PTFE
Filter cleaning system	InfiniClean	InfiniClean	InfiniClean	InfiniClean
FEATURES				
Softstart	•	•	•	•
Anti-static system	•	•	•	•
Automatic On/Off-elec. tools			•	•
L-class hazardous dust approval			•	•
Disposal bag 1 pcs	•	•	•	•
STANDARD EQUIPMENT				
UNIV HOSE WITH HAND TUBE D32X3500 CPL.	107409976	107409976		
CURVED HAND TUBE Ø36MM SS			46691	46691
EXTENSION TUBE Ø36 2X505MM SS			107408074	107408074
EXTENSION TUBE D36 2X505MM ST/CR	302000529	302000529		
TOOL ADAPTER D27 QUICKSYSTEM			302000535	302000535
FLOOR NOZZLE Ø36X300MM	302002331	302002331	302002331	302002331
CREVICE NOZZLE D36X200	29541	29541	29541	29541
HOSE Ø32X4000MM AS RED			107413543	107413543
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540	107413540	107413540
FLEXIBLE STRAP SET 2 PCS			107413553	107413553
ITEM NO.	107412111	107412110	107412113	107412112



## Very quiet, large capacity wet & dry vacuum cleaners

- The ATTIX 7 combines industrial specification, robust construction and power
- XtremeClean™ fully automatic filter cleaning system (selected models) takes care of filter cleaning tasks in just a few seconds without interrupting your work
- Washable PET Fleece filter for high efficiency and low maintenance costs
- SilentPower. High performance that is seen, but not heard
- 70 litre stainless steel container and a filter bag for the ultimate in effective filtration and working efficiency

The ATTIX 7 series is perfect for users who need high capacity vacuuming and features that focus on efficiency. Our most silent vacuum, with superior suction performance, stainless steel tilt or lift-out container, automatic filter cleaning, anti-static capability and more.



### TECHNICAL DATA

	<b>ATTIX 751-11 110V 50-60Hz GB</b>	<b>ATTIX 761-21 XC 110V 50-60Hz GB</b>	<b>ATTIX 791-21 EC 230V 50-60Hz EU</b>
Airflow rate (l/min.)	3600	3600	3800
Vacuum (mbar/kPa)	230/23	230/23	250/25
Power Pmax (W)	1500	1500	1500
Power Piec (W)	1200	1200	1200
Working sound level (dB(A))	57	57	59
Container volume (l-max)	70	70	70
Mains connection (V~/Hz/A)	110/1/50-60/16	110/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	605x580x970	605x580x970	605x580x970
Weight (kg)	25	27	25
El cable (m)	7.5	7.5	7.5
Main filter type	PET	PET Nano	PET
Filter cleaning system		XtremeClean	

### FEATURES

Filter bag	•	•	•
Tilting container	•	•	•
Motor speed control		•	•
Automatic On/Off-elec. tools		•	•
Brushless longlife 1-ph. motor			•
Extra socket for tool	•	•	•
Disposal bag 1 pcs		•	

### STANDARD EQUIPMENT

UNI. HOSE Ø36X4000MM EVA	25537		
CURVED HAND TUBE D36MM ST/CR	302000528		
EXTENSION TUBE D36 2X505MM ST/CR	302000529		
FLOOR NOZZLE Ø36X360MM WET/DRY	60356		
DIA. TUBE NOZZLE Ø36x190 MM GREY RUBBER	5067		
HOSE D27X3500 AS WITH TOOL ADAPTER		107406091	107406091
TOOL ADAPTER D27/36-24 AS		107404520	107404520
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490		302000490
FILTER ELEMENT D275X187 PET NANO M-CLASS		107400562	
<b>ITEM NO.</b>	<b>107409110</b>	<b>107409112</b>	<b>302001536</b>



### Twin-motor industrial wet & dry vacuum cleaners for the toughest applications

- Twin-motor industrial performance
- Washable PET Fleece, big surface filter for high efficiency and low maintenance costs
- Push&Clean™ filter cleaning system for high efficiency
- Stainless steel tiltable and removable 70 litre container for perfect handling and disposal
- 10 metre cable for a large working radius
- Applicable for wet & dry pick up by reliable floating system
- Robust fleece filter bag standard

Tough and reliable the ATTIX 9 is ideal for difficult cleaning tasks as well as daily maintenance cleaning. Its superb performance and quality construction make the ATTIX 9 a great choice for warehouses, factories and industry.



#### TECHNICAL DATA

	<b>ATTIX 961-01 230V 50-60Hz GB</b>	<b>ATTIX 961-01 110V 50-60Hz GB</b>
Airflow rate (l/min.)	2 x 3600	2 x 2900
Vacuum (mbar/kPa)	250/25	230/23
Power Pmax (W)	2 x 1500	2 x 1150
Power Piec (W)	2 x 1200	2 x 1000
Working sound level (dB(A))	67	67
Container volume (l-max)	70	70
Mains connection (V/~/Hz/A)	230/1/50-60/13	110/1/50-60/25
Length x width x height (mm)	580x600x970	580x600x970
Weight (kg)	30	30
El cable (m)	10	10
Main filter type	PET Nano	PET Nano
Filter cleaning system	Push&Clean	Push&Clean

#### FEATURES

Softstart	•	•
Tilting container	•	•
Anti-static system	•	•
Robust steel chassis	•	•
Fleece filter bag 1 pcs	•	•

#### STANDARD EQUIPMENT

UNI. SUCTION HOSE Ø38X4000MM EVA	302002796	302002796
CURVED HAND TUBE D38 MM SS	302002889	302002889
EXTENSION TUBES R38 2X500 KIT	107402474	107402474
FLOOR NOZZLE D38x400 WET AND DRY	302002798	302002798
CREVICE NOZZLE Ø38x300 MM PP	302002890	302002890
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562	107400562
<b>ITEM NO.</b>	<b>302002910</b>	<b>302002911</b>



### **Wet & dry vacuum cleaner for heavy-duty cleaning and hazardous dust collection**

- Twin-motor industrial performance
- XtremeClean™ fully automatic filter cleaning system for high efficiency also available in H Class
- Big surface washable PET Nano filter cartridge for high efficiency and low maintenance costs
- Stainless steel sit down container for perfect handling and disposal
- 10 metre cable for a large working radius
- Disposal bag standard
- Socket for automatic on/off

The tougher the cleaning, the better the vacuum cleaner needs to be. This is why so much thought has gone into the design of the ATTIX 965-21 SD. With 7200 ltr. per minute of air volume, and 3000 W of maximum power, it is capable of fast, productive cleaning of dirt, metal chips and liquid spills. A range of 38 mm and 50 mm accessories are available and makes it possible to handle all kind of jobs.



#### **TECHNICAL DATA**

#### **ATTIX 965-21 SD XC 230V 50-60Hz EU**

Airflow rate (l/min.)	2 x 3600
Vacuum (mbar/kPa)	250/25
Power Pmax (W)	2 x 1500
Power Piec (W)	2 x 1200
Working sound level (dB(A))	67
Container volume (l-max)	50
Mains connection (V~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	615x690x990
Weight (kg)	45
El cable (m)	10
Main filter type	PET Nano
Filter cleaning system	XtremeClean

#### **FEATURES**

Softstart	•
Anti-static system	•
Motor speed control	•
Robust steel chassis	•
Automatic On/Off-elec. tools	•
Release container system	•
Disposal bag 1 pcs	•

#### **STANDARD EQUIPMENT**

FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562
<b>ITEM NO.</b>	<b>302002902</b>



## Triple motor single-phase industrial vacuum cleaners

- Three independent "by-pass" motors
- L or M class filter
- HEPA filter as option
- Easy manoeuvrability
- 100 litre SitDown container with castors & handle
- Manual Filter shaker as standard
- Mechanical floater as option for liquid collection
- Comfortable grip and robust steel chassis for durability and easy mobility

The ATTIX 115 & 125 are simple single-phase industrial vacuums designed for cleaning in manufacturing and heavy industry. The machines are ideal for collecting both liquid and solid materials such as metal chips mixed with oil/coolant. They have a large capacity, high suction performance and robust design.



### TECHNICAL DATA

	<b>ATTIX 115-01 230V 50-60Hz EU</b>	<b>ATTIX 125-01 230V 50-60Hz EU</b>
Airflow rate (l/min.)	8100	8100
Vacuum (mbar/kPa)	230/23	230/23
Power Piec (W)	3 x 1000	3 x 1000
Working sound level (dB(A))	71	71
Container volume (l-max)	100	100
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	800x600x1555	800x600x1555
Weight (kg)	68	73
El cable (m)	9	9
Main filter type	PET Starfilter	PET Starfilter
Filter cleaning system	Manual filter shaker	Manual filter shaker

### FEATURES

Anti-static system	•	•
Release container system	•	•
Chassis on wheels with brakes	•	•
Independent motor/switches	•	•
L class filter	•	
M class filter		•

### STANDARD EQUIPMENT

ADAPTOR D70 CFM – D60 MULTIFIT	4072200392	4072200392
KIT STAR FILTER D460 L CLASS	40000338	
18 POCKET STAR FILTER KIT M CLASS		40000699
SMALL BASKET OBJECT KIT WITH NUTS BOLTS		40000892
REMOVABLE CYCLONE D460 FE COMPLETE BIG	Z5 60109	

### ITEM NO.

**4010500044**

**4010500045**



### Ideal for heavy industrial vacuum cleaning

- Powerful and reliable
- Double stage side-channel blower connected in parallel for a highest airflow (ATTIX 155 only)
- SitDown container with castors and handle for a practical material disposal
- Comfortable grip and robust steel chassis for durability and manoeuvrability
- MultiFit adapter included for high flexibility in accessory choice

The ATTIX 145 & 155 are three-phase industrial vacuums designed for cleaning in manufacturing and heavy industry. The machines are ideal for collecting both liquid and solid materials such as metal chips mixed with oil/coolant. They have a large capacity, high suction performance and robust design.



#### TECHNICAL DATA

	<b>ATTIX 145-01 400V 50Hz EU</b>	<b>ATTIX 155-01 400V 50Hz EU</b>
Airflow rate (l/min.)	5250	8600
Vacuum (mbar/kPa)	300/30	300/30
Power Piec (W)	2200	4000
Working sound level (dB(A))	68	72
Container volume (l-max)	100	100
Mains connection (V/~/Hz/A)	400/3/50/16	400/3/50/16
Length x width x height (mm)	1130x600x1530	1130x600x1530
Weight (kg)	114	139
El cable (m)	9	9
Main filter type	PET Starfilter	PET Starfilter
Filter cleaning system	Manual filter shaker	Manual filter shaker
FEATURES		
Anti-static system	•	•
Manometer	•	•
Release container system	•	•
Three-phase side channel blower	•	•
Chassis on wheels with brakes	•	•
L class filter	•	•
Plug with phase inverter	•	•
STANDARD EQUIPMENT		
ADAPTOR D70 CFM – D60 MULTIFIT	4072200392	4072200392
KIT STAR FILTER D460 L CLASS	40000338	40000338
<b>ITEM NO.</b>	<b>4030500151</b>	<b>4030800366</b>



## Coin-operated self service vacuums

- Superior suction power
- Tandem models have 2 vacuum motors and suction hoses
- Available in coins or token versions
- Simple cloth filter system for quick and easy maintenance


Coin-operated self-service vacuums for use on garage forecourts. All models use a simple cloth filter system for easy maintenance.



### TECHNICAL DATA

	<b>SB STATION 230V 50-60Hz EU</b>	<b>SB TANDEM 230V 50-60Hz EU</b>
Airflow rate (l/min.)	4000	2 x 4000
Vacuum (mbar/kPa)	235/23.5	2 x 235/23.5
Power Pmax (W)	1700	2 x 1700
Power Piec (W)	1400	2 x 1400
Working sound level (dB(A))	75	75
Container volume (l-max)	30	2 x 30
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	822x546x2034	1183x546x2034
Weight (kg)	90	115
Main filter type	Needle felt	Needle felt
<b>FEATURES</b>		
Softstart	•	•
2 suction hoses		•
Robust steel chassis	•	•
Simple cloth filter system	•	•
Automatic hose retraction	•	•
Dual motor		•
<b>STANDARD EQUIPMENT</b>		
UNI. HOSE Ø50X5000MM SB VAC	64084	64084
CREVICE NOZZLE Ø50X370 PE	7102	7102
SPEC CLOTH FILTER Ø375X350 NEEDLE FELT	17069	17069
COINER EURO/TOKEN 12VDC	302000305	302000305
<b>ITEM NO.</b>	<b>65481</b>	<b>65482</b>

# ATEX zone 22 - Beware of explosive dust

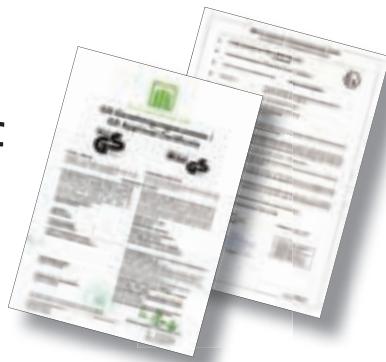

With regard to Health and Safety vacuum cleaners, diseases are not the only danger. It is well-known that cotton or paper can burn, but also other materials such as flour or even metals can ignite. The presence of oxygen and an ignition source with sufficient energy and a flammable substance (gas, liquid or solid) are factors which can provoke an explosion. The finer the dust, the higher the risk of explosion!



With the ATEX directive 94/9/EC that came into force in July 2003, the removal and separation of explosive materials has become an international regulation. Many types of dust which are potentially explosive are classified as an ATEX (ATmosphere EXplosive) application and equipment must meet additional and very special requirements.

Nilfisk offers a range of safety vacuum cleaners to pick up explosive dust and separate it from the surrounding air. If dusts are to be vacuumed which are both explosive and hazardous, the vacuum must meet the requirements for both explosive and hazardous dust applications.

## Additional test certificates and third party approvals

ATEX Directive 94/9/EC puts the burden on the manufacturer to ensure that products supplied for use in explosive atmospheres are ATEX compliant. This means that for a Health and Safety vacuum designed for use in an explosive atmosphere, the machine must be ATEX compliant with reference to the particular working environment.

All Nilfisk Type 22 vacuum cleaners are ATEX compliant in zone 22, and this range of vacuum cleaners has passed a wide range of technical test requirements and third party approvals.

In addition to the normal requirements for a certified Health and Safety vacuum cleaner, some of the requirements to be met are listed below:

- Electric working materials must correspond to the regulations of the VDE 0165 "Setup of electrical equipment in explosive areas", for example EC system drives (free from sources of ignition).
- The machine must correspond to protection class IP 54 at least.
- Working materials must be marked with the occurring surface temperatures during constant use when these temperatures exceed 80°C. In addition, surface temperature must not exceed 135°C.
- Electric motors must be protected against short circuit, overheating due to overload or phase dropout.
- Air flow out of the vacuum must be directed in such a way that settled dust cannot be whirled up – exhaust speed max. 1 m/s at 50 mm above the floor.
- Conductive machine parts (including attachments such as the suction hose and hand tube) must be electrostatically earthed.
- Special coupling is to be used which secures the earthing and makes confusion with non-conductive attachment parts impossible
- Earthing resistance must not be higher than 1 MQ.
- Container casing must be made of very non-flammable material.
- Vacuums should be clearly marked with a warning label stating "approved for use with flammable dusts in ZONE 22".
- The vacuum should also be marked with L, M or H class, depending on which requirements apply.

Nilfisk single-phase Type 22 vacuum cleaners for ATEX zone 22 are tested and certified with the above requirements.

# Respiratory and skin diseases result in very high human costs

The handling of hazardous dust is a complex matter that demands innovative product development and competent engineering. As a specialist, Nilfisk offers proven, state-of-the-art solutions in every hazard class involving the demanding task of picking up health endangering dusts.

Working with hazardous dust demands the highest level of safety to ensure maximum health protection. Nilfisk offers Health and Safety vacuum cleaners for hazardous dust classes – **L** (light), **M** (medium), **H** (high), and asbestos, and for explosive dusts classified as ATEX Type 22. All our solutions meet the new pan-European standards and bear all the necessary statutory test symbols. The entire range is designed for professionals who also demand low noise operation, ergonomics, long-life and reliable performance.

SINCE 1997 – EN 60335-2-69, IEC 60335-2-69		HAZARD TYPES	DISPOSAL
Dust class / zone	Max. permeability		
L	1%	Removes 99% of: <ul style="list-style-type: none"><li>Dusts with OEL values &gt; 1mg/m<sup>3</sup></li></ul>	-
M	0.1%	Removes 99.9% of: <ul style="list-style-type: none"><li>Dusts with OEL values &gt; 0.1mg/m<sup>3</sup></li><li>Wood dust</li></ul>	Low dust
H	0.005%	Removes 99.995% of: <ul style="list-style-type: none"><li>Dusts with OEL values</li><li>Carcinogenic dusts</li><li>Dusts with germs or bacteria</li></ul>	Dust free
Asbestos requirement	as H	<ul style="list-style-type: none"><li>Asbestos dust</li></ul>	
Explosive dusts (ATEX Zone 22)	Type 22 - As dust class L, M or H, with additional requirements	<ul style="list-style-type: none"><li>Dusts of dust explosion classes St1, St2 and St3 in ATEX Zone 22 (previously zone 11)</li></ul>	Basic machine for ATEX Zone 22 with test M or H



These vacuum cleaners permit picking up dusts from dust class L. These include dusts with OEL values > 1 mg/m<sup>3</sup>.



Asbestos is a group of naturally-occurring inorganic crystalline silicates which are found in the form of fibres. When subjected to mechanical loads these fibres can split, producing even thinner fibres, which can consequently be deposited in the lungs. Asbestos is not used anymore, but a lot of materials and buildings that contain asbestos have to be renovated. Asbestos dusts are only permitted to be picked up with vacuum cleaners conforming to dust class H.



These vacuum cleaners permit picking up dusts from dust classes L and M. These include all health-endangering, non-carcinogenic dusts with OEL values > 0.1 mg/m<sup>3</sup> and hardwood dusts.



These vacuum cleaners permit picking up dusts from dust classes L, M and H. These include all health-endangering dusts with OEL values, all carcinogenic dusts and dusts contaminated with germs and bacteria.



These vacuum cleaners are approved to pick up explosive/flammable dust in ATEX Zone 22 as well as dust from dust classes L, M or H. Furthermore these vacuum cleaners are approved to be used as dust extractors.



## Powerful and safe dust extractors for hazardous dust

- Push&Clean™ - Semi-automatic filter cleaning system on selected models
- Dust class M certification
- PTFE long-life filter with non-stick membrane and minimum 99.9% filtration efficiency
- Flow sensor with combined acoustic and LED warning
- 30 litre container with steel castors and robust bumper
- MultiFit accessory system for the ultimate in task flexibility
- Rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and long-life filter bag

The ATTIX 33-2M comes with more suction power, sealed dust system, semi automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & constructions and other industries when picking up hazardous M class dusts. This range represents a superior solution for professional customers looking for a reliable machine and to protect their health and safety.



### TECHNICAL DATA

	<b>ATTIX 33-2M PC 110-120V 50/60HZ GB</b>	<b>ATTIX 33-2M PC 220-240V 50/60HZ GB</b>
Airflow rate (l/min.)	4200	4500
Vacuum (mbar/kPa)	230/23	250/25
Power Pmax (W)	1200	1400
Power Piec (W)	1000	1200
Working sound level (dB(A))	60	60
Container volume (l-max)	30	30
Mains connection (V~/Hz/A)	110/1/50-60/16	230/1/50-60/13
Length x width x height (mm)	565x385x520	565x385x520
Weight (kg)	14.5	14.5
El cable (m)	7.5	7.5
Main filter type	PTFE M-class	PTFE M-class
Filter cleaning system	Push&Clean	Push&Clean

### FEATURES

Softstart	•	•
Anti-static system	•	•
Automatic On/Off-elec. tools	•	•
Fleece filter bag 1 pcs	•	•

### STANDARD EQUIPMENT

CURVED HAND TUBE Ø36MM SS	46691	46691
EXTENSION TUBE Ø36 2X505MM SS	107408074	107408074
TOOL ADAPTER D27 QUICKSYSTEM	302000535	302000535
FLOOR NOZZLE Ø36X300MM	302002331	302002331
CREVICE NOZZLE D36X200	29541	29541
HOSE Ø32X4000MM AS RED	107413543	107413543
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540
FLEXIBLE STRAP SET 2 PCS	107413553	107413553
<b>ITEM NO.</b>	<b>107412191</b>	<b>107412189</b>



### Powerful and large capacity dust extractor for hazardous dust

- InfiniClean™ - Automatic filter cleaning system with minimised performance loss
- PTFE long-life filter with non-stick membrane and minimum 99.9% filtration efficiency
- Dust class M certification
- Flow sensor with combined acoustic and LED warning
- 42 litre container with steel castors and robust bumper
- MultiFit accessory system for the ultimate in task flexibility
- Rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The ATTIX 44-2M comes with more suction power, sealed dust system, semi automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & constructions and other industries when picking up hazardous M class dusts. This range represents a superior solution for professional customers looking for a reliable machine and to protect their health and safety.



#### TECHNICAL DATA

#### ATTIX 44-2M IC 110-120V 50/60HZ GB

Airflow rate (l/min.)	4200
Vacuum (mbar/kPa)	230/23
Power Pmax (W)	1200
Power Piec (W)	1000
Working sound level (dB(A))	60
Container volume (l-max)	42
Mains connection (V~/Hz/A)	110/1/50-60/25
Length x width x height (mm)	565x385x605
Weight (kg)	16
El cable (m)	7.5
Main filter type	PTFE M-class
Filter cleaning system	InfiniClean

#### FEATURES

Softstart	•
Anti-static system	•
Automatic On/Off-elec. tools	•
Disposal bag 1 pcs	•
Fleece filter bag 1 pcs	•

#### STANDARD EQUIPMENT

CURVED HAND TUBE Ø36MM SS	46691
EXTENSION TUBE Ø36 2X505MM SS	107408074
TOOL ADAPTER D27 QUICKSYSTEM	302000535
FLOOR NOZZLE D36X400MM W/D	302003666
CREVICE NOZZLE D36X200	29541
HOSE Ø32X400MM AS RED	107413543
FLAT FILTER PTFE M-CLASS 1 PCS	107413540
FLEXIBLE STRAP SET 2 PCS	107413553
<b>ITEM NO.</b>	<b>107412194</b>



## Approved for work with M Class hazardous dust

- Approved for work with M class hazardous dust
- Industrial specifications - robust construction and powerful
- XtremeClean™ fully automatic filter cleaning system takes care of filter cleaning tasks in just a few seconds without interrupting your work
- Washable PET Fleece filter for high efficiency and low maintenance costs
- SilentPower. High performance that is seen, but not heard

The ATTIX 761-2M is designed for demanding cleaning tasks that involve M class hazardous dusts. It features a durable 70 litre stainless steel container which can be easily emptied by tilting or lifting the container off the robust steel frame. Working efficiency is enhanced with the XtremeClean™ automatic cleaning system for optimum suction performance.



### TECHNICAL DATA

#### ATTIX 761-2M XC 230V 50-60Hz EU

Airflow rate (l/min.)	3600
Vacuum (mbar/kPa)	230/23
Power Pmax (W)	1500
Power Piec (W)	1200
Working sound level (dB(A))	57
Container volume (l-max)	70
Mains connection (V~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	605x580x970
Weight (kg)	27
El cable (m)	7.5
Main filter type	PET Nano M-class
Filter cleaning system	XtremeClean

### FEATURES

Softstart	•
Anti-static system	•
Motor speed control	•
Stainless steel container	•
Automatic On/Off-elec. tools	•
Disposal bag 1 pcs	•
Fleece filter bag 1 pcs	•

### STANDARD EQUIPMENT

SUCTION BRUSH D36 BLACK	302002509
HOSE D27X3500 AS WITH TOOL ADAPTER	107406091
TOOL ADAPTER D27/36-24 AS	107404520
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562
ITEM NO.	302001535



## Approved for work with H class hazardous dust

- Industrial specifications, robust construction, and powerful
- Push&Clean™ is a filter cleaning system which allows you to clean the filter in seconds... and continue your work (except ATTIX 751-OH)
- SilentPower. High performance that is seen, but not heard

If you are working with H class hazardous dust, you will find the perfect wet & dry solution here. Choose from 3 different container sizes and other features which enhance your working efficiency.

The ATTIX 30-OH is a small machine with big performance and high mobility.

The ATTIX 50-OH is a mid-size machine with Push&Clean™ filter cleaning system.

The ATTIX 751-OH features a large stainless steel container which can be easily emptied by tilting or lifting off the robust frame.



TECHNICAL DATA	ATTIX 30-OH PC 110V 50Hz GB	ATTIX 30-OH PC 230V 50-60Hz GB	ATTIX 50-OH PC 230V 50-60Hz GB	ATTIX 751-OH 230V 50-60Hz EU
Airflow rate (l/min.)	3200	3700	3700	3100
Vacuum (mbar/kPa)	230/23	250/25	250/25	230/23
Power Pmax (W)	1150	1500	1500	1200
Power Piec (W)	1000	1200	1200	1000
Working sound level (dB(A))	59	59	59	57
Container volume (l-max)	30	30	47	70
Mains connection (V/~/Hz/A)	110/1/50/16	230/1/50-60/13	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	450x380x595	450x380x595	450x380x750	605x580x970
Weight (kg)	10	10	11	25
El cable (m)	10	10	7.5	7.5
Main filter type	H-class	H-class	H-class	H-class
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean	
FEATURES				
Softstart	•	•	•	•
Airflow sensor	•	•	•	•
Anti-static system	•	•	•	•
Stainless steel container				•
Fleece filter bag 1 pcs	•	•		
Safety filter bag 1 pcs			•	•
STANDARD EQUIPMENT				
UNI. HOSE Ø36X3000MM W COUPLING EVA	46948	46948	46948	46948
CURVED HAND TUBE Ø36MM SS				46691
CURVED HAND TUBE D36MM ST/CR	302000528	302000528	302000528	
EXTENSION TUBE D36 2X505MM ST/CR			302000529	
FLOOR NOZZLE D36X400MM W/D			302003666	
SUCTION BRUSH D36 BLACK				302002509
DIA. TUBE NOZZLE Ø36x190 MM GREY RUBBER	5067		5067	5067
FILTER ELEMENT Ø211X140 H-CLASS	302000658	302000658	302000658	302000658
ITEM NO.	107400417	107400418	107400407	302001519



## Industrial health & safety vacuum cleaner for M & H class hazardous dust

- Industrial specifications, robust construction, and powerful... the definition of ATTIX 9
- Approved for H and M class dusts.
- Twin-motor industrial performance
- XtremeClean™ fully automatic filter cleaning system for high efficiency in H and M class
- Big surface H class filter for high efficiency and low maintenance costs
- Stainless steel sit down container for perfect handling and disposal
- 10 metre cable for a large working radius
- Disposable and safety filter bag as standard

The ATTIX 965-0H/M SD XC is the most powerful two-motor machine that is approved to be used for both H and M class dusts. Featuring XtremeClean™ automatic filter cleaning and a stainless steel sit down container. The perfect disposal concept for Industrial use and health endangering and carcinogenic dust.



### TECHNICAL DATA

#### ATTIX 965-0H/M SD XC 230V 50Hz EU

Airflow rate (l/min.)	2 x 3600
Vacuum (mbar/kPa)	250/25
Power Pmax (W)	2 x 1500
Power Piec (W)	2 x 1200
Working sound level (dB(A))	67
Container volume (l-max)	50
Mains connection (V~/Hz/A)	230/1/50/16
Length x width x height (mm)	615x690x990
Weight (kg)	45
El cable (m)	10
Main filter type	H-class
Filter cleaning system	XtremeClean

### FEATURES

Softstart	•
Anti-static system	•
Release container system	•
Disposal bag 1 pcs	•
Safety filter bag 1 pcs	•

### STANDARD EQUIPMENT

FILTER ELEMENT D275X187 H-CLASS	107400564
ITEM NO.	302002903







- Can be used. (Items included as standard can be seen on the machine pages)


# Accessories for Vacuum Cleaners



## Accessories for Vacuum Cleaners



Item no.



## Accessories for Vacuum Cleaners



- Standard equipment
- Supplementary accessories
- Mountable equipment



Item no.

- Standard equipment
- Supplementary accessories
- Mountable equipment



# Accessories for Vacuum Cleaners



- Standard equipment
- Supplementary accessories
- Mountable equipment



- Standard equipment
  - Supplementary accessories
  - Mountable equipment

# Accessories for Vacuum Cleaners



- Standard equipment
- Supplementary accessories
- Mountable equipment



- Standard equipment
- Supplementary accessories
- Mountable equipment



	Item no.
OTHER	
TOOL BOX, AERO 26/31	107409980
TUBE HOLDER KIT D36	107409979
AIRBOX 230V 50 HZ EU	107400079
AIRBOX 230V/1/50 EU	302001192
FORKLIFT ACCESSORY	302002622
SPARK EXTINGUISHER Ø50	34591
DISCHARGE KIT MS2-S3-T30S	4056000468
KIT MECANICAL FLOAT S3B SS	4056000519
COINER EURO/TOKEN 12VDC	302000305
TOKENS Ø26.0x2.3 SET-50 Ø6 HOLE	5544
DETACH CORD SET 10M ORANGE EU	107402676
DETACH CORD SET 10M ORANGE UK	107402677
DETACH CORD SET 15M ORANGE EU	107402901
NUMATIC ADAPTER 20PCS	107401199
TELESCOPIC TUBE HOLDER KIT D32	107409978
ADAPTER PLATE KIT	107413551
FLEXIBLE STRAP SET 2 PCS	107413553
SALTEX 10 UK MAXXII II/55-2 WD MAXXII I/55 WD	
AERO 21-01 PC 110V AERO 21-01 PC 230V AERO 26-21 PC 110V AERO 26-21 PC 230V ATTIX 30-01 PC 110V ATTIX 30-01 PC 230V ATTIX 30-21 PC 110V ATTIX 30-21 PC 230V ATTIX 40-01 PC INOX	
ATTIX 50-01 PC 110V ATTIX 50-01 PC 230V-VLT	
ATTIX 50-21 PC CLEAN ROOM	
ATTIX 33-01 IC 110-240V ATTIX 33-01 IC 220-240V ATTIX 33-2L IC 110-240V ATTIX 33-2L IC 220-240V ATTIX 751-11 110V	
ATTIX 751-21 XC 110V ATTIX 751-21 EC 230V ATTIX 961-01 110V	
ATTIX 965-21 SD XC 230V ATTIX 115-01 230V	
ATTIX 125-01 230V ATTIX 145-01 400V ATTIX 961-01 110V	
SB STATION 230V SB TANDEM 230V	
ATTIX 33-2N PC 110-240V ATTIX 33-2N PC 220-240V ATTIX 44-2N IC 110-240V ATTIX 761-2N XC 230V ATTIX 30-0H PC 110V ATTIX 30-0H PC 230V ATTIX 50-0H PC 230V ATTIX 751-0H 230V ATTIX 965-0H SD XC 230V	

Sweeping & Cleaning						Item no.	
	SALTIX 10 UK MAXXII 175-2 WD MAXXII 155-2 WD MAXXII 135 WD	AERO 21-01 PC 110 V AERO 21-01 PC 230 V AERO 26-21 PC 110V AERO 26-21 PC 230V ATTIX 30-01 PC 110V ATTIX 30-01 PC 230V ATTIX 30-21 PC 230V ATTIX 30-21 PC 110V ATTIX 40-01 PC INOX ATTIX 50-01 PC 230V ATTIX 50-01 PC 230V/VLT ATTIX 50-01 PC 110V ATTIX 50-21 PC CLEAN ROOM ATTIX 33-01 IC 110-120V ATTIX 33-01 IC 220-240V ATTIX 33-2L IC 110-120V ATTIX 33-2L C 220-240V ATTIX 75-11 110V ATTIX 75-21 XC 110V ATTIX 79-21 EC 230V ATTIX 95-01 230V ATTIX 95-01 110V ATTIX 95-21 SD XC 230V ATTIX 115-01 230V ATTIX 125-01 230V ATTIX 145-01 400V ATTIX 155-01 400V SB STATION 230V ATTIX 33-2M PC 110-120V ATTIX 33-2M PC 220-240V ATTIX 75-2M IC 110-120V ATTIX 30-01 PC 110V ATTIX 30-01 PC 230V ATTIX 50-01 PC 230V ATTIX 75-1H 230V					
Other	TROLLEY HANDLE KIT		○ ○ ○		○ ○ ○	107413552	
	STORAGE L-BOXX KIT W. DUSTBAGS		○ ○ ○ ○		○ ○ ○	107413554	
Option	REMOVABLE CYCLONE D460 FE COMPLETE BIG			● ○ ○ ○		Z5 60109	
Hose Vacuum Cleaner	HOSE CPL ANTISTATIC BLACK	○				107415116	
	HOSE CPL D32	●				147 0765 500	
	HOSE D32 1.9M CPL	●				107407308	
	HOSE D40 2.5M CPL	● ●				107407336	
Tube	EXTENSION TUBE ALUMINIUM	●				011 6431 500	
	EXTENSION TUBE D32 - SS	●				107407309	
	EXTENSION TUBE D40 - SS	● ●				107407337	
	TELESCOPIC TUBE 1130MM D32					81906500	
	TELESCOPIC TUBE ALUMINIUM	○				011 8130 500	
	TELESCOPIC TUBE ACC.	○				107403804	
Vac Nozzle Wet	FLOOR NOZZLE D32 RUBBER STRIP	○				107407310	
	FLOOR NOZZLE D40 RUBBER STRIP	○ ○				107407338	
	HARDFLOOR NOZZLE 300MM x Ø32MM - KIT	●				107416575	
	HARDFLOOR NOZZLE 400MM x Ø32MM - KIT	○				107416576	

- Standard equipment
- Supplementary accessories
- Mountable equipment



Vac Nozzle Wet

HARDFLOOR NOZZLE 400MM x Ø40MM - KIT

SALTEX 10 UK  
MAXXII II/5-2 WD  
MAXXII I/5-2 WD

AERO 2-01 PC 110V  
AERO 21-01 PC 230V  
AERO 26-21 PC 110V  
AERO 26-21 PC 230V  
ATTIX 30-01 PC 110V  
ATTIX 30-01 PC 230V  
ATTIX 30-21 PC 230V

AERO 2-01 PC 110V  
AERO 21-01 PC 230V  
AERO 26-21 PC 110V  
AERO 26-21 PC 230V  
ATTIX 30-01 PC 110V  
ATTIX 30-01 PC 230V  
ATTIX 30-21 PC 230V

ATTIX 30-21 PC 110V  
ATTIX 40-01 PC INOX  
ATTIX 50-01 PC 230V  
ATTIX 50-01 PC 230V-VLT  
ATTIX 50-21 PC CLEAN ROOM

ATTIX 30-21 PC 110V  
ATTIX 30-21 PC 110V  
ATTIX 33-01 IC 110-240V  
ATTIX 33-2L IC 110-240V  
ATTIX 33-2L IC 220-240V  
ATTIX 751-11 110V  
ATTIX 761-21 XC 110V  
ATTIX 791-21 EC 230V  
ATTIX 961-01 230V  
ATTIX 965-21 SD XC 230V  
ATTIX 115-01 230V  
ATTIX 125-01 230V  
ATTIX 145-01 400V  
ATTIX 155-01 400V  
SB STATION 230V  
SB TANDEM 230V  
ATTIX 33-2W PC 110-240V  
ATTIX 33-2W PC 220-240V  
ATTIX 44-2W IC 110-240V  
ATTIX 761-2W XC 230V  
ATTIX 30-0H PC 110V  
ATTIX 30-0H PC 230V  
ATTIX 50-0H PC 230V  
ATTIX 751-0H 230V  
ATTIX 965-0H SD XC 230V

ATTIX 30-21 PC 110V  
ATTIX 40-01 PC INOX  
ATTIX 50-01 PC 230V  
ATTIX 50-01 PC 230V-VLT  
ATTIX 50-21 PC CLEAN ROOM

ATTIX 30-21 PC 110V  
ATTIX 30-21 PC 110V  
ATTIX 33-01 IC 110-240V  
ATTIX 33-2L IC 110-240V  
ATTIX 33-2L IC 220-240V  
ATTIX 751-11 110V  
ATTIX 761-21 XC 110V  
ATTIX 791-21 EC 230V  
ATTIX 961-01 230V  
ATTIX 965-21 SD XC 230V  
ATTIX 115-01 230V  
ATTIX 125-01 230V  
ATTIX 145-01 400V  
ATTIX 155-01 400V  
SB STATION 230V  
SB TANDEM 230V  
ATTIX 33-2W PC 110-240V  
ATTIX 33-2W PC 220-240V  
ATTIX 44-2W IC 110-240V  
ATTIX 761-2W XC 230V  
ATTIX 30-0H PC 110V  
ATTIX 30-0H PC 230V  
ATTIX 50-0H PC 230V  
ATTIX 751-0H 230V  
ATTIX 965-0H SD XC 230V

Item no.

107416577

Hard Floor Nozzle

FLOOR NOZZLE D32 BRUSH

● ●

107407311

FLOOR NOZZLE D40 BRUSH

● ●

107407339



NOZZLE MULTI SURFACE D32

○

140 6700 570



HARDFLOOR NOZZLE 350MM KIT

○

107413080



HARDFLOOR NOZZLE 495MM KIT

○

107413081



Round Brush Nozzle

BRUSH NOZZLE D32

●

140 8244 500



BRUSH NOZZLE D32

● ●

107407312



Crevice Nozzle

CREVICE NOZZLE D32

● ●

107407334



CREVICE NOZZLE D32 L153 BLACK

○

147 0146 500



CREVICE NOZZLE D40

● ●

107408850



Combination Nozzle

COMBI NOZZLE RD277 KIT

○

107411677



COMBI NOZZLE RD295 D32

○

140 8492 520



COMBI NOZZLE RD295P W.CLIP

●

107417790



Squeegee, Blade, Skirt and Splash Guard

SQUEEGEE COMPLETE ANTHRACIT

○ ○

107407051



HEPA Filter

HEPA FILTER H13

●

147 1250 500




Extension Tube


EXTENSION TUBE STEEL D32

○

140 8246 040

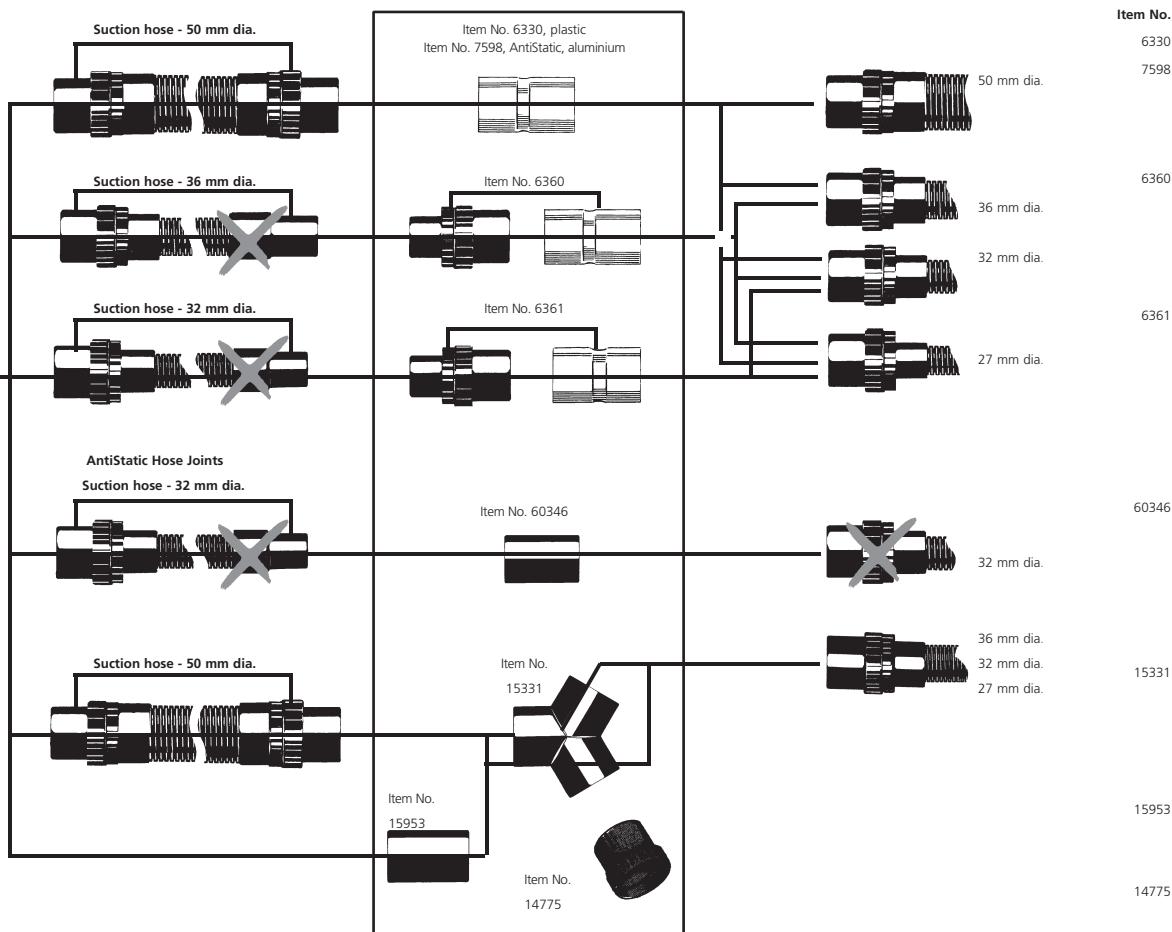

## Suction Hoses



### Universal

Colour: Silver metallic, Ø27, Ø32, Ø36, Ø38, Ø50  
To use: Temperature at -50 to +60°C



### Antistatic

Colour: Black, Ø27, Ø32, Ø36, Ø50  
To use: Temperature at -50 to +60°C

### Oil-resistant

Colour: Brown, Ø36, Ø50  
To use: Temperature at -60 to +120°C (short term +150°C)  
Bend radius: Ø27 r = 60 mm, Ø32 r = 70 mm, Ø36 r = 75 mm, Ø50 r = 120 mm



### Heat-resistant

Colour: Brown, Ø36, Ø50  
To use: Temperature at -60 to +120°C (short term +150°C)  
Bend radius: Ø36 r = 75 mm, Ø50 r = 120 mm




### Chips, abrasive

Colour: Transparent, Ø50  
To use: Temperature at -40 to +90°C (short term +125°C)  
Bend radius: Ø60 r = 60 mm  
Special for metal shavings, glass, sliver and other materials, oil-resistant, antistatic, aluminium sleeves and steel wire coil



### Metal

Colour: Galvanized, Ø50  
To use: Temperature at -50 to +120°C  
Bend radius: r = 180 mm  
High wear-resistant. Not suitable for acid and lye.



# Suction Hose Systems - Except Type 22 Vacuums

Lengths as required		Nozzle side sleeve	By the metre - max 20 m	Vacuum side sleeve	Complete	
		Item No.	Item No.	Item No.	Length m	Item No.
System 70	Universal		42419	34947***		34955
System 50	Universal		15101	11984		15101
	Oil-resistant		15101	14238		15101
	Heat-resistant	Aluminium		7162		7162
	Antistatic		15811	7599		15811
	Chips	Aluminium		33435		14630
	Metal			15309	4	15013
System 38	Universal		302002887	107400052 (only available in roll of 20 m)		107400049
	Antistatic		107410009			107401525
			107417868*			
System 36	Universal		11597	11985		15102
			107417867*	11985		15102
	Oil-resistant		46690*	6429		15102
	Heat-resistant	Aluminium		7674**		7673
		Anti-kink spring		14194**		
	AntiStatic		107417867*	15312		15812
					3	
					4	
					5	
					4	
					4	
	Electric tool	Connection DN 33-36		48070		60781*
		DIN 44717, DN 35-40 AS		48750		63209*
System 32	Universal		107417866*	14240***		15103
	Hand tube		60911	14240***		15103
	Antistatic		107417866*			30928
	Electric tool		107404564	43502		30928
System 27	Universal	Electric tool		107404520	15307	
	Antistatic	Electric tool		107404520	15326	

\* Quick system for curved hand tube 46691/302000528 or adapter

\*\* Only for oven and pipe cleaning

\*\*\* Max. 10 m \*\*\*\* Max. 20 m AS = Antistatic





## Health & safety wet & dry vacuum cleaners for ATEX Zone 22 explosive dust

- Approved for work in ATEX Type 22 environments with explosive dust
- Industrial performance, robust construction, and loaded with useful features to maximise your efficiency and minimise your costs
- Brushless, long life motors for top performance and durability
- Automatic Start/Stop for electric tools connected to Attix 7 variants
- A full range of Type 22 accessories are available to tailor your machine to your application

The ATTIX 40 Type 22 and ATTIX 7 Type 22 machines are powerful vacuum cleaners with stainless steel containers approved to be used for both M class dust and ATEX Zone 22 environments. The built-in FlowSensor and acoustic warning signal monitors air speed in the suction hose to make sure that it does go below the minimum 20 m/s. The perfect concept for industrial use where safety is a must.



TECHNICAL DATA	ATTIX 40-0M PC TYPE 22	ATTIX 791-2M/B1 230V	ATTIX 791-2M/B1 110V
Airflow rate (l/min.)	3200	3800	3600
Vacuum (mbar/kPa)	230/23	250/25	250/25
Power Pmax (W)	1400	1500	1200
Power Piec (W)	1100	1200	1000
Working sound level (dB(A))	60	59	59
Container volume (l-max)	37	70	70
Mains connection (V~/Hz/A)	230/1/50-60/16	230/1/50-60/13	110/1/50-60/25
Length x width x height (mm)	450x440x750	605x580x970	605x580x970
Weight (kg)	13	25	25
El cable (m)	7.5	7.5	7.5
Main filter type	PET	PET	PET
Filter cleaning system	Push&Clean		
FEATURES			
Softstart	•	•	•
Anti-static system	•	•	•
Motor speed control		•	•
Automatic On/Off-elec. tools		•	•
Brushless longlife 1-ph. motor	•	•	•
Extra socket for tool		•	•
Fleece filter bag 1 pcs	•	•	•
STANDARD EQUIPMENT			
HOSE 27X3500 CONDUCTIVE TYPE22		107404779	107404779
HOSE Ø36X4000MM W COUPLING TYPE 22	44193		
TOOL ADAPTER D27/36-24 TYPE 22		107404521	107404521
CURVED HAND TUBE TYPE22 Ø36MM SS	44188		
DIAGONAL TUBE NOZZLE TYPE22 Ø36 RUBBER	302000227		
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490	302000490	302000490
MOTOR COOLING AIR FILTER		302000491	302000491
MOTOR COOLING FILTER KIT	302003721		
ITEM NO.	107400410	302001538	302001539



## Health & safety wet & dry vacuum cleaner for ATEX Zone 22 explosive dust

- Industrial specifications, robust construction, and powerful
- Approved for ATEX Zone 22, H and M class
- 2 brushless EC (Electronic Controlled) motors
- Twin-motor industrial performance
- XtremeClean™ fully automatic filter cleaning system for high efficiency in H and M class
- Big surface H class filter for high efficiency and low maintenance costs
- Stainless Steel SitDown container for perfect handling and disposal
- 10 metre cable for a large working radius
- Disposal and Safety filter bag as standard

The ATTIX 995-0H/M SD XC Type 22 is a powerful twin-motor machine that is approved to be used for both M and H class dust in a Zone 22 environments. Featuring XtremeClean™ filter cleaning and a Stainless Steel SitDown container. This is perfect solution for industrial use where safety is a must.



TECHNICAL DATA	ATTIX 995-0H/M SD XC TYPE 22 EU
Airflow rate (l/min.)	2 x 3200
Vacuum (mbar/kPa)	230/23
Power Pmax (W)	2 x 1400
Power Piec (W)	2 x 1100
Working sound level (dB(A))	67
Container volume (l-max)	50
Mains connection (V~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	615x690x990
Weight (kg)	45
El cable (m)	10
Main filter type	H-class
Filter cleaning system	XtremeClean
FEATURES	
Softstart	•
Anti-static system	•
Brushless longlife 1-ph. motor	•
Release container system	•
Disposal bag 1 pcs	•
Safety filter bag 1 pcs	•
STANDARD EQUIPMENT	
FILTER ELEMENT D275X187 H-CLASS	107400564
MOTOR COOLING AIR FILTER ATTIX9/IVB9	107400041
ITEM NO.	<b>302002904</b>



43245

**System TYPE 22 (ATEX) Hose Vacuum Cleaner**

HOSE 27X3500 CONDUCTIVE TYPE22

ATTIX 40-0M PC TYPE22 230V

ATTIX 791-2M/B1 230V

ATTIX 791-2M/B1 110V

ATTIX 995-0HM SD XC TYPE 22 230V

**Item no.**

○

●

●

107404779

HOSE Ø50X4000MM CONDUCTIVE TYPE 22

○

○

○

○

43245

HOSE Ø50X4000MM CHIP TYPE 22

○

○

○

○

42825

HOSE Ø50X8000MM CHIP TYPE 22

○

○

○

○

63710

HOSE Ø36X4000MM W COUPLING TYPE 22

●

○

○

○

44193

TOOL ADAPTER D27/36-24 TYPE 22

○

●

●

107404521

**System TYPE 22 (ATEX) Tube/Nozzle**

EXTENSION TUBE TYPE22 Ø36X950MM SS

○

○

○

○

46982

CURVED EXTENSION TUBE TYPE22 Ø50x1100 S

○

○

○

○

33609

CURVED HAND TUBE TYPE22 Ø36MM SS

●

○

○

○

44188

DIAGONAL TUBE NOZZLE TYPE22 Ø36 RUBBER

●

○

○

○

302000227

DIAGONAL TUBE NOZZLE TYPE22 Ø50 RUBBER

○

○

○

○

42836

CREVICE NOZZLE TYPE 22 Ø36 L290MM PLAST

○

○

○

○

44192

CREVICE NOZZLE TYPE22 Ø50X350 PE

○

○

○

○

42837

PIPE CLEAN NOZZLE TYPE22 Ø36 R70-120MM

○

○

○

○

48066

PIPE CLEAN NOZZLE TYPE22 Ø36 R120-200MM

○

○

○

○

48067

FLOOR NOZZLE TYPE22 Ø36X450MM

○

○

○

○

302000369

FLOOR NOZZLE TYPE22 Ø 50X500MM

○

○

○

○

42834

BRUSH NOZZLE TYPE22 Ø36X230MM PE

○

○

○

○

44191

# Accessories for Type 22 Vacuum Cleaners



System TYPE 22 (ATEX) Tube/Nozzle

ROUND BRUSH NOZZLE TYPE22 Ø 50MM

ATTIX 40-0M PC TYPE 22 230V

ATTIX 791-2M/B1 230V

ATTIX 791-2M/B1 110V

ATTIX 995-0HM SD XC TYPE 22 230V

Item no.

42831

FLAT NOZZLE TYPE22 Ø50MM RUBBER

○

○

○

42839

COARSE DIRT NOZZLE TYPE22 Ø50x200MM ALU

○

○

○

42835

System 50 Vac Floor Nozzle



FIXED FLOOR NOZZLE Ø50X600MM ALU

○

○

○

302001481

Safety Filter Bag



SAFETY FILTER BAG ATTIX 40/50 SETS

○

107400236

SAFETY FILTER BAG ATTIX/IVB 7 SETS

○


302001486

SAFETY FILTER BAG ATTIX/IVB 9 SETS

○

302003473

Filter



FILTER ELEMENT Ø185X140 PET M-CLASS

●

●

302000490

FILTER ELEMENT D275X187 H-CLASS

●

107400564

Filter Bag



FLEECE FILTER BAG PU 5 PCS

○

○

302002892

FLEECE FILTER BAG 5 PCS ATTIX 40/50

○

302004004



FILTER BAG ATTIX 7 5 PCS

○

○

302001484

Disposal Bag



DISPOSAL BAG ATTIX 3/30/40 5 PCS

○

302000804



DISPOSAL BAG ATTIX 7 5 PCS

○

○

302001480



DISPOSAL BAG FOR FILTER ELEMENT

○

○

30082



Special Filter

MOTOR COOLING AIR FILTER

●

●

302000491



MOTOR COOLING FILTER KIT

●

302003721

- Standard equipment
- Supplementary accessories
- Mountable equipment



## Special Filter

MOTOR COOLING AIR FILTER ATTIX9/IVB9

ATTIX 40-0M PC TYPE 22 230V

ATTIX 995-0HM SD XC TYPE 22 230V

● 107400041

## FILTER FOR MOTOR COOLING 30/40/50

○

107400453

## Other

FORKLIFT ACCESSORY

○ 302002622

ACCESSORY BASKET

○ 302002624



## Exhaust Air Collector

EXHAUST AIR COLLECTOR

○

302003717

EXHAUST FITTING KIT D50 ATTIX 9

○ 107409036



## Vacuum Accessory Set

TYPE 22 VACUUM SET Ø36MM 6-PCS

○

○

○

○

48907

Item no.



Domestic Pressure Washers and Wet & Dry Vacuums



## Compact and handy high pressure washers for basic outdoor cleaning tasks

- The C110.7X-TRA is easy to use, move around and store with its compact and lightweight design
- The C110.7 has a built-in trolley
- The automatic start/stop system along with an aluminum pump makes this a reliable product

You can make good use of the C110.7 X-TRA pressure washer. It is a handy size and the built-in trolley makes it easy to transport.



TECHNICAL DATA	C110.7-5 PCA X-TRA UK	C110.7-5 PC X-TRA UK	C110.7-5 X-TRA UK
Pump pressure (bar/MPa)	Max 110/ Max 11	Max 110/ Max 11	Max 110/ Max 11
Water flow Qmax/Qiec (l/h)	440 / 310	440 / 310	440 / 310
Max. inlet temperature (°C)	40	40	40
Power consumption (A)	6.0	6.0	6.0
Rated power (kW)	1.4	1.4	1.4
Weight (kg)	6	6	6
Hose length (m)	5	5	5
Voltage (V)	220 - 240	220 - 240	220 - 240
Length x width x height (mm)	260x295x660	260x295x660	260x295x660
FEATURES			
Trolley	•	•	•
Aluminium pump	•	•	•
Lance and spray gun storage	•	•	•
Click&Clean (C&C) nozzle concept	•	•	•
Gun with quick connection and swivel	•	•	•
Automatic start/stop	•	•	•
STANDARD EQUIPMENT			
HOSE 5M	126481137	126481137	126481137
G1 GUN NILFISK	128500908	128500908	128500908
C&C FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077
G2 C&C SPRAY LANCE	128500073	128500073	128500073
NILFISK COMPACT PATIO ACC	128500700	128500700	
FIXED BRUSH SHORT NILFISK SP	128500685		
C&C POWERSPEED	128500298	128500298	128500298
TORNADO G2 TURQUOISE	126481122	126481122	126481122
ITEM NO.	<b>128470804</b>	<b>128471001</b>	<b>128470922</b>



## Handy high pressure washers with trolley for basic outdoor cleaning tasks

- Automatic start/stop system along with aluminum pump makes it a reliable product
- The compact design even with trolley and low weight makes it convenient to move around
- With Click&Clean connectivity a broad range of accessories ranging from nozzles, brushes, foam sprayers and patio cleaners can be attached
- The C120.7 has a built-in trolley

The C 120.7 models are suitable for users with light to moderate cleaning tasks. If you are in need of a compact and easy to use high pressure washer with a good cleaning performance then the C 120.7 is worth considering. It is super for tasks around the house and garden such as cleaning of cars, bicycles, garden furniture and small to medium sized patios.



TECHNICAL DATA	C 120.7-6 UK	C 120.7-6 PCAD UK	C 120.7-6 PCA UK
Pump pressure (bar/MPa)	Max 120 / Max 12	Max 120 / Max 12	Max 120 / Max 12
Water flow Qmax/Qiec (l/h)	440 / 310	440 / 310	440 / 310
Max. inlet temperature (°C)	40	40	40
Power consumption (A)	6.2	6.2	6.2
Rated power (kW)	1.4	1.4	1.4
Weight (kg)	6.2	6.2	6.2
Hose length (m)	6	6	6
Voltage (V)	220 - 240	220 - 240	220 - 240
Length x width x height (mm)	260x295x710	260x295x710	260x295x710
FEATURES			
Trolley	•	•	•
Aluminium pump	•	•	•
Lance and spray gun storage	•	•	•
Click&Clean (C&C) nozzle concept	•	•	•
Gun with quick connection and swivel	•	•	•
Automatic start/stop	•	•	•
STANDARD EQUIPMENT			
HOSE 6M	126481138	126481138	126481138
G1 GUN NILFISK	128500908	128500908	128500908
C&C FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077
G2 C&C SPRAY LANCE	128500073	128500073	128500073
NILFISK COMPACT PATIO ACC		128500700	128500700
DRAIN AND TUBE 8M		128500461	
C&C POWERSPEED	128500298	128500298	128500298
PR TORNADO DARK BLUE	126481120	126481120	126481120
FIXED BRUSH SHORT NILFISK SP		128500685	128500685
ITEM NO.	128470932	128471014	128471008




## Handy high pressure washers with trolley for basic outdoor cleaning tasks

- Automatic start/stop system along with aluminum pump makes it a reliable product
- The compact and lightweight design makes it easy to move around
- With Click&Clean connectivity a broad range of accessories ranging from nozzles, brushes, foam sprayers and patio cleaners can be attached
- Hose reel for convenient storage
- Trolley for high mobility

The C 125.7 models are suitable for users with light to moderate cleaning tasks. If you are in need of a compact and easy to use high pressure washer with a good cleaning performance then the C 125.7 is worth considering. It is super for tasks around the house and garden such as cleaning of cars, bicycles garden furniture and small to medium sized patios.



TECHNICAL DATA	C125 7-6 PCAD X-TRA UK	C125 7-6 PCA X-TRA UK	C125 7-6 X-TRA UK
Pump pressure (bar/MPa)	Max 125 / Max 12,5	Max 125 / Max 12,5	Max 125 / Max 12,5
Water flow Qmax/Qiec (l/h)	460 / 320	460 / 320	460 / 320
Max. inlet temperature (°C)	40	40	40
Power consumption (A)	6.4	6.4	6.4
Rated power (kW)	1.5	1.5	1.5
Weight (kg)	6.6	6.6	6.6
Hose length (m)	6	6	6
Voltage (V)	220 - 240	220 - 240	220 - 240
Length x width x height (mm)	270x300x820	270x300x820	270x300x820
FEATURES			
Trolley	•	•	•
Hose reel	•	•	•
Aluminium pump	•	•	•
Lance and spray gun storage	•	•	•
Click&Clean (C&C) nozzle concept	•	•	•
Gun with quick connection and swivel	•	•	•
Automatic start/stop	•	•	•
STANDARD EQUIPMENT			
HOSE 6M	126481138	126481138	126481138
G1 GUN NILFISK	128500908	128500908	128500908
C&C FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077
G2 C&C SPRAY LANCE	128500073	128500073	128500073
NILFISK COMPACT PATIO ACC	128500700	128500700	
DRAIN AND TUBE 8M	128500461		
C&C POWERSPEED	128500298	128500298	128500298
PR TORNADO DARK BLUE	126481120	126481120	126481120
FIXED BRUSH SHORT NILFISK SP	128500685	128500685	
ITEM NO.	<b>128470986</b>	<b>128470985</b>	<b>128470952</b>

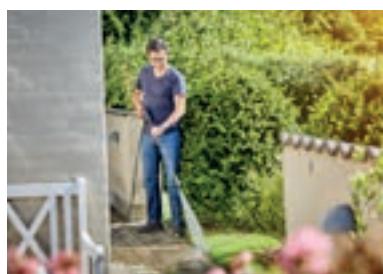

## All round use - handy and powerful

- 135 bar max pressure
- Sturdy design with aluminum pump and induction motor
- Automatic start/ stop system
- Less noisy
- Trolley for high mobility
- Hose reel for convenient storage of hose
- Storage of gun, lance, nozzle and foam sprayer
- Click&Clean connectivity for quick and easy change of nozzles

### HIGH PERFORMANCE AND FULL FLEXIBILITY

This powerful Nilfisk high pressure washer easily handles larger and frequent cleaning tasks.

From gentle cleaning of more soft or sensitive surfaces to blasting away ingrained dirt. The large handle, sturdy wheels and long hose all ensure the ease-of-use you want, when working for longer periods of time. The powerful choice for harder tasks.

To increase performance, this Nilfisk comes with Click&Clean connectivity for a range of optional accessories.



### TECHNICAL DATA

	C135.1-6i X-TRA UK	C135.1-6i PAD X-TRA UK
Pump pressure (bar/MPa)	Max 135 / max 13.5	Max 135 / max 13.5
Water flow Qmax/Qiec (l/h)	440/ 380	440/ 380
Max. inlet temperature (°C)	40	40
Power consumption (A)	7.4	7.4
Rated power (kW)	1.7	1.7
Dimensions (L x W x H) (mm)	305 x 295 x 885	305 x 295 x 885
Weight (kg)	15.8	15.8
Hose length (m)	6	8
Voltage (V)	230	230

### FEATURES

Trolley	•	•
Cable holder	•	•
Hose reel	•	•
Aluminium pump	•	•
Lance and spray gun storage	•	•
Automatic start/stop	•	•
Pressure regulation in nozzle	•	•

### STANDARD EQUIPMENT

8M STANDARD HOSE		128500080
HOSE 6M	126481138	126481138
G3 GUN WITH INTERMEDIATE TUBE	126481132	126481132
G3 LANCE COMPLETE	126481134	126481134
NILFISK PATIO ACCESSORY		128500702
DRAIN AND TUBE 8M		128500461
C&C POWERSPEED	128501153	128501153
PR TORNADO TURQUOISE	126481118	126481118
FIXED BRUSH SHORT NILFISK SP		128500685
<b>ITEM NO.</b>	<b>128471171</b>	<b>128471205</b>



## All round use - high performance

- Powerful pressure and water flows
- Automatic start/ stop system
- Sturdy build with metal pump and induction motor for long life
- Telescopic handle for convenient user height and later storage
- Trolley ensures high mobility and ease of use
- Rubber suspension ensures a lower noise when working
- Storage of gun, lance, nozzles and foam sprayer onboard
- Convenient storage of electric cable
- Can be used as stationary machine with optional wall hook

### HIGH PERFORMANCE AND FULL FLEXIBILITY

This powerful Nilfisk high pressure washer easily handles larger and frequent cleaning tasks.

From gentle cleaning of more soft or sensitive surfaces to blasting away ingrained dirt. The telescopic handle, sturdy wheels and long hose all ensure the ease-of-use you want, when working for longer periods of time. The powerful choice for harder tasks.

To increase performance, this Nilfisk comes with Click&Clean connectivity for a range of optional accessories.



### TECHNICAL DATA

### D140 4-9 X-TRA UK

Pump pressure (bar/MPa)	Max 140 / max 14
Water flow Qmax/Qiec (l/h)	550/ 420
Max. inlet temperature (°C)	40
Power consumption (A)	10
Rated power (kW)	2.4
Dimensions (L x W x H) (mm)	345x395x875
Weight (kg)	13.8
Hose length (m)	9
Voltage (V)	220-240
<b>FEATURES</b>	
Trolley	•
Hose reel	•
Aluminium pump	•
Lance and spray gun storage	•
Cable storage	•
Telescopic handle	•
<b>STANDARD EQUIPMENT</b>	
HOSE TEXTILE SOFT 9M FOR MODEL	128500654
C&C FOAMSPRAYER WITH BOTTLE	128500077
CLEANING TOOL BLACK	6520844
G4 SPRAY HANDLE W.SOFT COATING	128500071
NILFISK PATIO ACCESSORY	
DRAIN AND TUBE 8M	
G4 NOZZLE TUBE SHORT	128500676
C&C POWERSPEED	128501153
PR TORNADO DARK BLUE	126481120
TORNADO CC 4 DOTS DARK BLUE	
ROTARY BRUSH	
<b>ITEM NO.</b>	<b>128471207</b>



## All round use - high performance

- D-PG version offer PowerGrip pressure control for broader range of cleaning tasks
- Powerful pressure and water flows
- Automatic start/ stop system
- Sturdy build with metal pump and induction motor for long life
- Telescopic handle for convenient user height and later storage
- Trolley ensures high mobility and ease of use
- Rubber suspension ensures a lower noise when working
- Storage of gun, lance, nozzles and foam sprayer onboard
- Convenient storage of electric cable
- Can be used as stationary machine with optional wall hook

### HIGH PERFORMANCE AND FULL FLEXIBILITY

This powerful Nilfisk high pressure washer easily handles larger and frequent cleaning tasks.

From gentle cleaning of more soft or sensitive surfaces to blasting away ingrained dirt. The telescopic handle, sturdy wheels and long hose all ensure the ease-of-use you want, when working for longer periods of time. The powerful choice for harder tasks.

To increase performance, this Nilfisk comes with Click&Clean connectivity for a range of optional accessories.



### TECHNICAL DATA

### D-PG 140 4-9 X-TRA UK

Pump pressure (bar/MPa)	Max 140 / max 14
Water flow Qmax/Qiec (l/h)	550/ 420
Max. inlet temperature (°C)	40
Power consumption (A)	10
Rated power (kW)	2.4
Dimensions (L x W x H) (mm)	345 x 395 x 875
Weight (kg)	18.6
Hose length (m)	9
Voltage (V)	220-240

### FEATURES

Trolley	•
Hose reel	•
Aluminium pump	•
Lance and spray gun storage	•
Cable storage	•
Telescopic handle	•
Wireless PowerGrip	•

### STANDARD EQUIPMENT

HOSE TEXTILE SOFT 9M FOR MODEL	128500654
C&C FOAMSPRAYER WITH BOTTLE	128500077
CLEANING TOOL BLACK	6520844
G4 C&C SPRAY LANCE LONG VER.	
G4 POWERGRIP SPRAY HANDLE	128500077
NILFISK PATIO ACCESSORY	
DRAIN AND TUBE 8M	
G4 NOZZLE TUBE SHORT	128500676
POWERSPEED	128501153
TORNADO CC 4 DOTS DARK BLUE	128500854
<b>ITEM NO.</b>	<b>128471181</b>



## All round use - high performance

- Powerful pressure and water flows
- Automatic start/ stop system
- Sturdy build with metal pump and induction motor for long life
- Telescopic handle for convenient user height and later storage
- Trolley ensures high mobility and ease of use
- Rubber suspension ensures a lower noise when working
- Storage of gun, lance, nozzles and foam sprayer onboard
- Convenient storage of electric cable
- Can be used as stationary machine with optional wall hook

### HIGH PERFORMANCE AND FULL FLEXIBILITY

This powerful Nilfisk high pressure washer easily handles larger and frequent cleaning tasks.

From gentle cleaning of more soft or sensitive surfaces to blasting away ingrained dirt. The telescopic handle, sturdy wheels and long hose all ensure the ease-of-use you want, when working for longer periods of time. The powerful choice for harder tasks.

To increase performance, this Nilfisk comes with Click&Clean connectivity for a range of optional accessories.



TECHNICAL DATA	E145.4-9 PAD X-TRA UK	E145.4-9 PA X-TRA UK	E145.4-9 P X-TRA UK	E145.4-9 X-TRA UK
Pump pressure (bar/MPa)	Max 145 / max 14.5	Max 145 / max 14.5	Max 145 / max 14.5	Max 145 / max 14.5
Water flow Qmax/Qiec (l/h)	500/ 420	500/ 420	500/ 420	500/ 420
Max. inlet temperature (°C)	40	40	40	40
Power consumption (A)	9.5	9.5	9.5	9.5
Rated power (kW)	2.1	2.1	2.1	2.1
Dimensions (L x W x H) (mm)	345 x 395 x 900	345 x 395 x 900	345 x 395 x 900	345 x 395 x 900
Weight (kg)	18.6	18.6	18.6	18.6
Hose length (m)	9	9	9	9
Voltage (V)	220-240	220-240	220-240	220-240
FEATURES				
Trolley	•	•	•	•
Hose reel	•	•	•	•
Aluminium pump	•	•	•	•
Lance and spray gun storage	•	•	•	•
Cable storage	•	•	•	•
Telescopic handle	•	•	•	•
Wireless PowerGrip				
STANDARD EQUIPMENT				
HOSE TEXTILE SOFT 9M FOR MODEL	128500654	128500654	128500654	128500654
G4 POWERGRIP SPRAY HANDLE			128500077	128500077
C&C FOAMSPRAYER WITH BOTTLE	128500077	128500077	6520844	6520844
CLEANING TOOL BLACK	6520844	6520844		
G4 SPRAY HANDLE W.SOFT COATING	128500071	128500071	128500071	128500071
NILFISK PATIO ACCESSORY	128500702	128500702		
DRAIN AND TUBE 8M	128500461		128500702	
NILFISK POWER PATIO				
G4 NOZZLE TUBE SHORT	128500676	128500676	128500676	128500676
C&C POWERSPEED	128501153	128501153	128501153	128501153
PR TORNADO DARK BLUE	126481120	126481120	126481120	126481120
TORNADO CC 4 DOTS DARK BLUE	12850854	12850854	12850854	12850854
ROTARY BRUSH	126411395	126411395		
ITEM NO.	128471192	128471190	128471188	128471186



## A powerful, long-life, high-pressure washer



- 150 bar, max pressure.
- Sturdy built with all-aluminum pump and long-life induction motor
- Automatic start/ stop system.
- 10m reinforced steel armed hose for wider coverage
- One-hand operated hose reel
- Telescopic handle with sturdy and robust aluminum tubes
- Rubber suspension ensures a lower noise when working
- Easy storage of gun, lance, nozzles and foam sprayer on-board
- Convenient storage of electric cable
- A built-in trolley for increased mobility
- Can be used as a stationary machine with optional wall hook

This powerful Nilfisk pressure washer easily handles larger and frequent cleaning tasks. From gentle cleaning of more soft or sensitive surfaces to blasting away ingrained dirt.

To increase performance, this pressure washer comes with Click&Clean connectivity for a range of optional accessories. There is also easy storage for the gun, lance, nozzles and foam sprayer on-board.



### TECHNICAL DATA

### E 150.2-10 H X-TRA UK

Pump pressure (bar/MPa)	Max 150/ max 15
Rated power (kW)	2.1
Water flow Qmax/Qiec (l/h)	500/ 400
Hose length (m)	10
Max. inlet temperature (°C)	40
Weight (kg)	19.8
Voltage/phase/frequency/current (V~/Hz/A)	230 - 240 / 1~ / 50 / 10
Cable length (m)	5
Length x width x height (mm)	395 x 345 x 875

### FEATURES

Trolley	•
Aluminium pump	•
Lance and spray gun storage	•
Storage of accessories	•
Cable storage	•
Click&Clean (C&C) nozzle concept	•
Gun with quick connection and swivel	•
Automatic start/stop	•
Soft grip	•
Superflex (steel armed) hose	•
Pressure regulation in nozzle	•
Telescopic handle	•

### STANDARD EQUIPMENT

HOSE STEEL ARMED 10M FOR MODEL	128500656
C&C POWER SPEED	128501153
PR TORNADO RED2 LINES CLICK	128500657
C&C FOAMSPRAYER WITH BOTTLE	128500077
CLEANING TOOL BLACK	6520844
G4 NOZZLE TUBE SHORT	128500676
G4 SPRAY HANDLE W.SOFT COATING	128500071
<b>ITEM NO.</b>	<b>128471201</b>



### **Sturdy robust top of the range consumer pressure washer for powerful outdoor cleaning**

- Brass cylinder head
- Telescopic handle for easy storage
- Built-in trolley and large wheels for excellent mobility on all surfaces
- Pressure regulation
- Soft grip on handle and gun
- Accessory storage on the machine
- Hooks for storage of electric cable
- Internal detergent system with regulation of detergent dosage
- Long lance and 10 m high pressure hose
- Hose reel

This is a sturdy and robust pressure washer - the top of the consumer range. Easily handles any application in a reliable, effective and Powerful way.



#### **TECHNICAL DATA**

#### **P150.2-10 X-TRA UK**

Pump pressure (bar/MPa)	Max 150 / Max 15
Water quantity min./max. (l/h)	610 / 540
Max. inlet temperature (°C)	60
Power consumption (A)	12.6
Rated power (kW)	2.9
Weight (kg)	26.8
Hose length (m)	10
Voltage (V)	230
Length x width x height (mm)	390x380x955

#### **FEATURES**

Trolley	•
Detergent tank	•
Hose reel	•
Brass cylinder head	•
Cable storage	•
Automatic start/stop	•

#### **STANDARD EQUIPMENT**

10M SUPERFLEX HOSE	128500082
G5 SPRAY LANCE	128500075
CLEANING TOOL BLACK	6520844
G5 SPRAY HANDLE	128500072
POWER SPEED	128500079
TORNADO PR	128500078

#### **ITEM NO.**

**128470131**

# Accessories for Pressure Washers



Hose and Connection

8M STANDARD HOSE

	C110.75.PFA.X-TRA.UK	C110.75.PC.X-TRA.UK	C110.75.X-TRA.UK	C120.7.6.UK	C120.7.6.PCA.D	C120.7.6.PCA.UK	C125.7.6.PCA.D	C125.7.6.PCA.X-TRA.UK	C125.7.6.PCA.X-TRA.UK	C135.1.6.X-TRA.UK	D-PC140.4-9.X-TRA.UK	D140.4-9.X-TRA.UK	E145.4-9.PAD.X-TRA.UK	E145.4-9.PAD.X-TRA.UK	E145.4-9.X-TRA.UK	E145.4-9.X-TRA.UK	E150.2-10.H.X-TRA	P150.2-10.X-TRA.UK		<b>Item no.</b>
																			128500080	

10M SUPERFLEX HOSE

● 128500082

EXT. HOSE 7 M - QUICK COUPLING

○ 106411346

EXTENSION HOSE 7 M

○ 6410760

EXTENSION HOSE STEEL ARMED 7 M

○ 6411048

HOSE 5M

● 126481137

HOSE 6M

● 126481138

NILFISK BA VALVE COMP. GARDENA

○ 106411177

HOSE TEXTILE SOFT 9M FOR MODEL

● 128500654

G1 GUN NILFISK

● 128500908

HOSE SOFT DN6 8M WITH THREAD

● 128500857

G4 NOZZLE TUBE

● 128500669

HOSE STEEL ARMED 10M FOR MODEL

● 128500656

**Accessory**

G4 POWERGRIP SPRAY HANDLE

● 128500859

G5 SPRAY LANCE

● 128500075

C&C FOAMSPRAYER WITH BOTTLE

● 128500077

CLEANING TOOL BLACK

● 6520844

DRAIN AND TUBE CLEANER ALTO

● 6410766

- Standard accessories
- Supplementary accessories
- Supplementary and mountable accessories

## Accessories for Pressure Washers



- Standard accessories
- Supplementary accessories
- Supplementary and mountable accessories





- Standard accessories
  - Supplementary accessories
  - Supplementary and mountable accessories



## 12 litre wet and dry vacuum cleaner for indoor and outdoor use at home

- 1200 watt motor will pick up any debris you want to get rid of
- The blow function provides you with another option for cleaning
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around
- The standard wet filter protects the turbine and ensures a long lifetime
- The built-in accessory holder provides storage for your accessories so that they are always at hand
- Ergonomic grip ensures that the machine is in balance when you carry it around
- The grip is shaped so that you can place the tube on top when having a break

The Nilfisk Buddy II 12 is a small, lightweight yet powerful wet and dry vacuum cleaner. This 12 litre version is the perfect choice when you need to pick up wet or dry debris in your home, your car, your workshop or garage. It is easy to move around and compact in storage.



### TECHNICAL DATA

### NILFISK BUDDY II 12 UK

Weight (kg)	4.4
Vacuum tube diameter (mm)	36
Hose length (m)	1.9
Dimensions (L x W x H) (mm)	360x330x440
Vacuum (mbar/kPa)	200/20
Power Pmax (W)	1200
Power Piec (W)	1000
Mains connection (V~/Hz/A)	220-240/ 1~/ 50/60
Container volume (l-max)	12
Max. suction power (W)	250
Plug for electric tools (W)	No
Sound level lpa/lwa (dB(A))	87/74

### FEATURES

Compact design	•
Wet & dry performance	•
MultiFit accessory system	•
Suction control on hand tube	•
Storage of accessories	•
Blow function	•

### STANDARD EQUIPMENT

CREVICE NOZZLE D36X200	29541
FILTER KIT FOR BUDDY II	81943047
TUBE WITH PARKING CLIPS	31000862
WET & DRY NOZZLE KIT	81943049
Fleece Bags pack of 4	81943048
<b>ITEM NO.</b>	<b>18451120</b>



## 18 litre wet and dry vacuum cleaner for home use

- 18 litre robust Polypropylene container
- 1200 watt motor will pick up any debris you want to get rid of
- The blow function provides you with another option for cleaning
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around
- The standard wet filter protects your turbine for a long lifetime
- The built in accessory holder provides storage for your accessories so they are always at hand
- Ergonomic grip so you will have a balanced machine when you carry it around
- The grip is shaped so you can place the tube on top when having a break

The Nilfisk Buddy II is a small, lightweight yet powerful wet and dry vacuum cleaner . This 18 litre version will be the perfect choice when you need to pick up wet or dry debris in your home, your car, your workshop or garage. It is easy to move around and compact in storage.



### TECHNICAL DATA

### NILFISK BUDDY II 18 UK

Weight (kg)	4.9
Vacuum tube diameter (mm)	36
Hose length (m)	1.9
Dimensions (L x W x H) (mm)	360x330x530
Vacuum (mbar/kPa)	200/20
Power Pmax (W)	1200
Power Piec (W)	1000
Mains connection (V~/Hz/A)	220-240/ 1~/ 50/60
Container volume (l-max)	18
Max. suction power (W)	250
Plug for electric tools (W)	no
Sound level lpa/lwa (dB(A))	87/74

### FEATURES

Compact design	•
Wet & dry performance	•
MultiFit accessory system	•
Suction control on hand tube	•
Storage of accessories	•
Blow function	•

### STANDARD EQUIPMENT

CREVICE NOZZLE D36X200	29541
FILTER KIT FOR BUDDY II	81943047
TUBE WITH PARKING CLIPS	31000862
WET & DRY NOZZLE KIT	81943049
Fleece Bags pack of 4	81943048
<b>ITEM NO.</b>	<b>18451125</b>



## 18 litre wet and dry vacuum cleaner with power tool socket for home use

- The Nilfisk Buddy II 18 T makes it handy working with power tools and removing dust and dirt in the same process
- Attach your power cord to the machine and connect the suction hose to your power tool with the included power tool adapter
- 1200 watt motor will pick up any debris you want to get rid of
- The blow function provides you with another option for cleaning
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around
- The standard wet filter protects your turbine for a long lifetime
- The built in accessory holder provides storage for your accessories so they are always at hand
- Ergonomic grip so you will have a balanced machine when you carry it around
- The grip is shaped so you can place the tube on top when having a break

The Nilfisk Buddy II 18 T is a small, lightweight yet powerful wet and dry vacuum cleaner. This 18 litre version will be the perfect choice when you need to pick up wet or dry debris in your home, your car, your workshop or garage. It is easy to move around and compact to store. This vacuum is equipped with an electrical power outlet to connect your power tool.



### TECHNICAL DATA

### NILFISK BUDDY II 18 T UK

Weight (kg)	5.5
Vacuum tube diameter (mm)	36
Hose length (m)	4
Dimensions (L x W x H) (mm)	360x330x530
Vacuum (mbar/kPa)	200/20
Power Pmax (W)	1200
Power Piec (W)	1000
Mains connection (V~/Hz/A)	220-240/ 1~/ 50/60
Container volume (l-max)	18
Max. suction power (W)	250
Plug for electric tools (W)	Yes - 1100
Sound level lpa/lwa (dB(A))	87/74

### FEATURES

Compact design	•
Wet & dry performance	•
MultiFit accessory system	•
Suction control on hand tube	•
Storage of accessories	•
Blow function	•

### STANDARD EQUIPMENT

CREVICE NOZZLE D36X200	29541
FILTER KIT FOR BUDDY II	81943047
TUBE WITH PARKING CLIPS	31000862
WET & DRY NOZZLE KIT	81943049
Fleece Bags pack of 4	81943048
Power Tool Adaptor	302002356
<b>ITEM NO.</b>	<b>18451135</b>



## A good companion for tough cleaning and DIY projects

- Filter clean indicator for continued high performance
- Push&Clean™ a semi-automatic filter cleaning function
- Sturdy build with a robust 1200 W engine for long life
- High suction power for efficient cleaning
- Blow function provides another cleaning option
- 22 litre container with good net filling capacity
- Polypropylene container for easy cleaning
- Soft start by attached powertool

The Multi II is a good companion to the do it yourself person in any home. It is also a good second vacuum cleaner dedicated to dirt and debris inside as well as outside the your home.



### TECHNICAL DATA

### NILFISK MULTI II 22 T UK


Vacuum (kPa)	200/20
Weight (kg)	9.20
Vacuum tube diameter (mm)	36
Hose length (m)	2.2
Dimensions (L x W x H) (mm)	426x374x599
Power Pmax (W)	1200
Power Piec (W)	1130
Mains connection (V~/Hz/A)	220-240/ 1~/ 50/60
Max. suction power (W)	270
Plug for electric tools (W)	No
Capacity (l)	22
Sound level Lpa/lwa (dB(A))	85/72

### FEATURES

Wet & dry performance	•
Push&Clean filter cleaning	•
Automatic On/Off-elec. tools	•
Variable speed control	•
Blow function	•
Steel container	•
Filter Clean Indicator	•

### STANDARD EQUIPMENT

CREVICE NOZZLE D36X200	29541
FILTER KIT 1 PCS	107417194
TUBE WITH PARKING CLIPS	31000862
SUCTION HOSE 2.5M 1 PCS	107417192
FLOOR NOZZLE D36 W/D 1 PCS	107417197
Fleece Bags pack of 4	107417195
Power Tool Adaptor	302002356
<b>ITEM NO.</b>	<b>18451585</b>

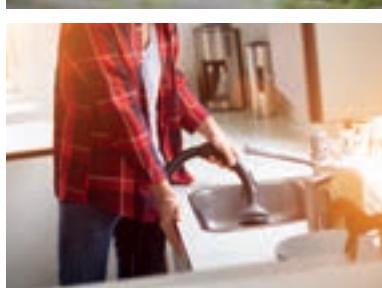

## A powerful and versatile wet & dry vacuum cleaner

- Filter clean indicator for continued performance
- Push&Clean™ a semi-automatic filter cleaning function
- Sturdy build with a robust 1400 W engine for long life
- High suction power for efficient cleaning
- Blow function for optional cleaning
- 30 litre container with good net filling capacity
- Polypropylene container for easy cleaning
- Variable Suction control and Inox container offered as a variant
- Soft start by attached powertool

The Multi II is a good companion for the DIY person in any home. It is also a good second vacuum cleaner dedicated to dirt and debris inside as well as outside the home.



### TECHNICAL DATA

### NILFISK MULTI II 30 T UK

Vacuum (kPa)	210/21
Weight (kg)	10.50
Vacuum tube diameter (mm)	36
Hose length (m)	4
Dimensions (L x W x H) (mm)	426x374x684
Power Pmax (W)	1400
Power Piec (W)	1260
Mains connection (V~/Hz/A)	220-240/ 1~/ 50/60
Max. suction power (W)	292
Plug for electric tools (W)	Yes, 1100
Capacity (l)	30
Sound level Ipa/lwa (dB(A))	87/74

### FEATURES

Softstart	•
Push&Clean filter cleaning	•
Automatic On/Off-elec. tools	•
Variable speed control	
Blow function	•
Filter Clean Indicator	•

### STANDARD EQUIPMENT

CREVICE NOZZLE D36X200	29541
FILTER KIT 1 PCS	107417194
SUCTION HOSE 4M 1 PCS	107417193
FLOOR NOZZLE D36 W/D 1 PCS	107417197
Tube with Parking Clips	31000862
Fleece Bags pack of 4	107417195
Power Tool Adaptor	302002356

### ITEM NO.

**18451559**

# Accessories for Vacuum Cleaners



		NILFISK BUDDY II 18 UK	NILFISK BUDDY II 12 UK	NILFISK BUDDY II 18 TUK	NILFISK MULTI II 22 TUK	NILFISK MULTI II 30 TUK	Item no.
	<b>System 36 Brush/Universal Nozzle</b> SUCTION BRUSH D36 BLACK	○	○	○			302002509
	UNIVERSAL NOZZLE D36X15	○	○	○			14295
	<b>System 36 Vac Floor Nozzle</b> COMBI NOZZLE Ø36X260MM	○	○	○			302002365
	FLOOR NOZZLE D36x300MM W/D KIT	○	○	○			107402706
	SUCTION NOZZLE WATER Ø36 300MM	○	○	○			63992
	<b>System 36 Crev/Cone Nozzle</b> CREVICE NOZZLE D36X200	●	●	●			29541
	<b>System 36 Tube</b> EXTENSION TUBE D36 2X500MM ALU	○	○	○			107400032
	EXTENSION TUBE D36 2X515MM PLASTIC	○	○	○			40696
	TELESCOPIC TUBE Ø36X550-970 SS	○	○	○			47109
	<b>Dust Bag and Filter</b> Buddy II Fleece Bags pack of 4	○	○	○			81943048
	FILTER KIT FOR BUDDY II	●	●	●			81943047
	Multi II Fleece Bags pack of 4				●	●	107417195
	<b>Accessory</b> TUBE WITH PARKING CLIPS	●	●	●			31000862
	<b>Accessory Kit</b> BLOW NOZZLE KIT	○	○	○			107402483
	WALL DRILL KIT	○	○	○			107402478
	WET & DRY NOZZLE KIT	●	●	●			81943049
	CONVENIENCE KIT-TOPBOX	○	○	○			107417191
	PREMIUM CAR KIT-TOPBOX	○	○	○			107417190

- Standard equipment
- Supplementary accessories
- Mountable equipment



	NILFISK BUDDY II 18 UK	NILFISK BUDDY II 12 UK	NILFISK BUDDY II 18 T UK	NILFISK MULTI 22 T UK	NILFISK MULTI 30 T UK	Item no.
<b>Tube</b>						
TELESCOPIC TUBE PLAST.-KIT	○	○	○			107402705
<b>Hose and Connection</b>						
SUCTION HOSE 2.5M 1 PCS	○	○	○			107417192
SUCTION HOSE 4M 1 PCS	○	○	○			107417193
<b>Nozzle - Vacuum</b>						
FLOOR NOZZLE D36 W/D 1 PCS	○		○			107417197
POWER TOOL ADAPTOR			●	●	●	302002356







At Nilfisk, we are proud to be one of the world's leading manufacturers of professional cleaning equipment with a heritage of over 110 years in the industry. With global company headquarters in Denmark, our products are produced in Europe, the Americas and China, and used worldwide. Nilfisk has an extensive network of sales entities across 45 countries and is represented in more than 100 countries around the world.

Our products cover the broad range of needs of the professional cleaning customer. Our main product lines are high pressure washers and vacuum cleaners. Our products are recognised for their high quality and reliability.

We see sustainability as an integral part of sound business practice. We develop cleaning solutions that provide you with cleaning efficiency while using less energy, less water and less detergent. When we reduce consumption of resources, it benefits both you and the environment. As your professional business partner, we must constantly innovate our business in order to strengthen yours. This is the promise Nilfisk makes to you as your trusted partner.

Find more information on [www.nilfisk.co.uk/nilfisk.ie](http://www.nilfisk.co.uk/nilfisk.ie).