


High Pressure Cleaner

Hot water, mobile, electric heated - Series HDE

HDE840 24kW

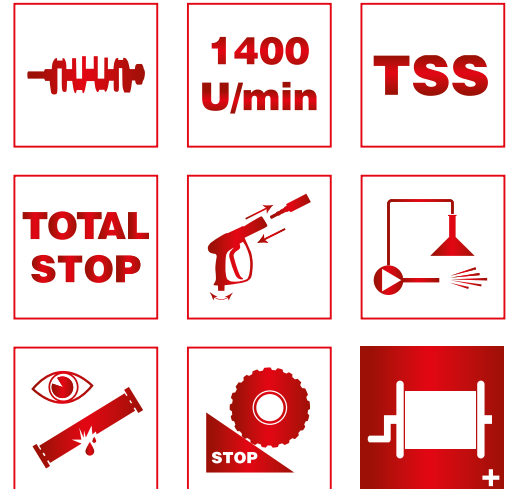

Type		HDE840 24kW-Standard	HDE840 24kW-Premium
Voltage	3/PE/AC/50Hz/415V	<ul style="list-style-type: none"> ▶ Etronic II - Controls ▶ 10m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve 	<ul style="list-style-type: none"> ▶ Etronic II - Controls ▶ Hose-Reel ▶ 20m HP-Hose DN08 - 315bar ▶ Trigger-Gun with swivel ▶ Spray-Lance 900mm c/w Nozzle-Protection ▶ Stainless-Steel Jet-Nozzle 25° ▶ Spray-Lance 900mm c/w Rotary-Nozzle ▶ Water-Supply separation acc. water reg. ▶ Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-140bar/3-14MPa		
Max. pressure	160bar/16MPa		
Discharge capacity	300-720l/h		
Nozzle size	045		
Heating capacity	24kW		
Hot water capacity	30-80°C		
Pump speed	1400rpm		
Connected load	28,8kW/44A		
Electrical protection	3x50A slow-blowing		
Weight net/with package		124kg/145kg	133kg/154kg
Dimensions device/with package (LxWxH)		1070x735x1020mm/1190x880x1270mm	1070x735x1020mm/1190x880x1270mm
<p>Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, stainless-steel hotwater-boiler with 65l capacity with pre-heating and buffer storage for immediate hot-water use and hot-water preparation during stand-by operation, triplex-piston pump with chrome nickel pump head (hot-water resistant), high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (start-stop system with switch-off delay, stand-by system for heating, low-water cut-off), unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, 2 integrated detergent-tank with 20l capacity, 2-stage rotary on-off switch with stand-by function, 7,5m connection cable, removable ergonomic drawbar.</p>			
Art. No.		108001	108002